




SELECTION GUIDE FOR AM / FM RADIO TRANSISTOR KIT




TYPE	POLARITY	APPLICATIONS	CASE
KM 9011	NPN	AM/FM IF, AM CONVERTER	TO-92A  EBC 
KM 9012	PNP	AUDIO POWER OUTPUT	
KM 9013	NPN	AUDIO POWER OUTPUT	
KM 9014	NPN	AUDIO DRIVER	
KM 9015	PNP	AUDIO DRIVER	
KM 9016	NPN	FM RF	
KM 9018	NPN	AM/FM IF, FM CONVERTER	


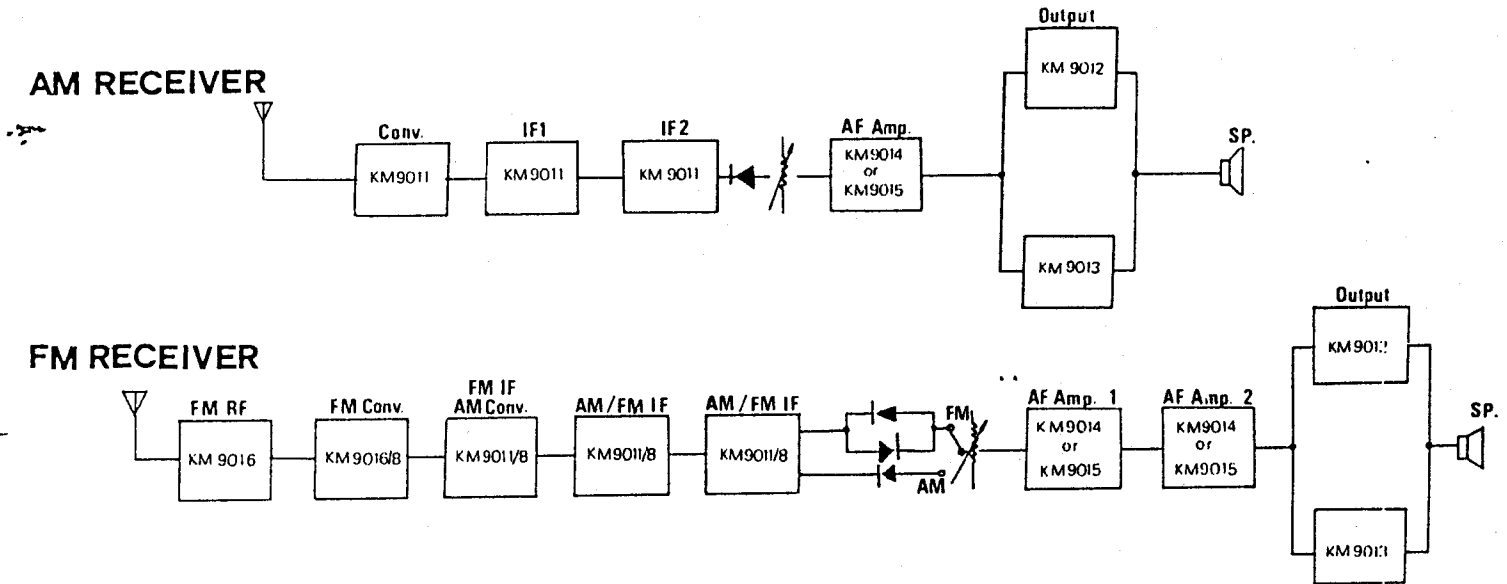


MICRO ELECTRONICS LTD. 美科有限公司



38 Hung To Road, Kwun Tong, Kowloon, Hong Kong. Cable: Microtron, Hong Kong. Telex: 43510 Micro HX.
P.O. Box 9477, Kwun Tong. Tel: 3-430181-6, 3-893363, 3-892423, 3-898221

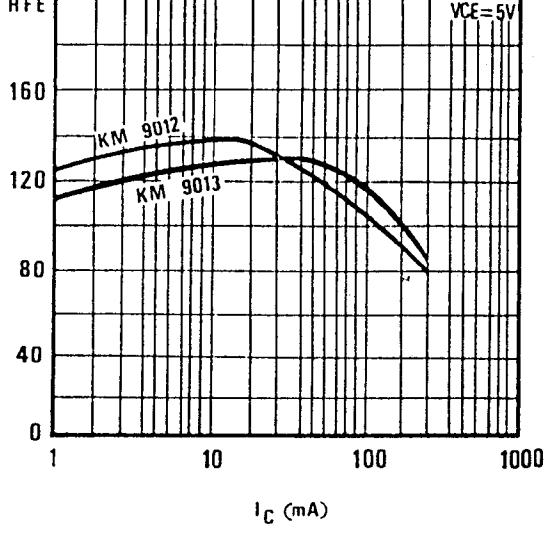


KM 9013

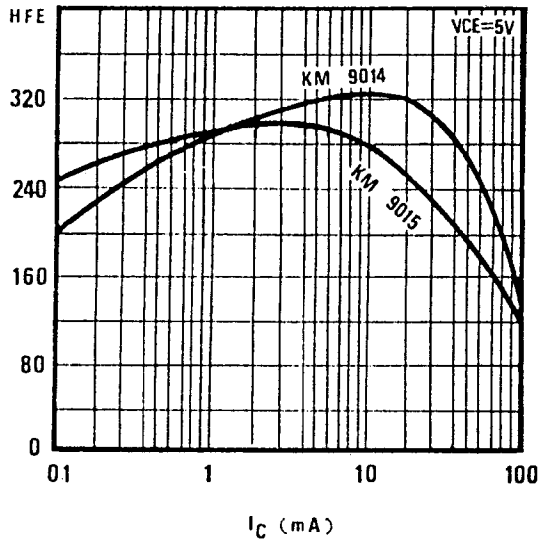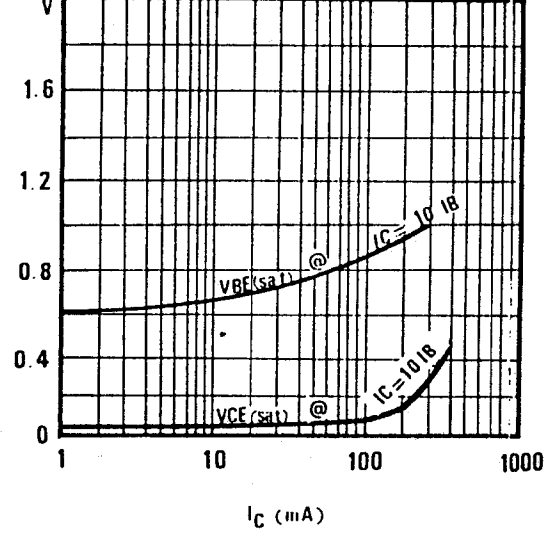

KM 9014
KM 9015

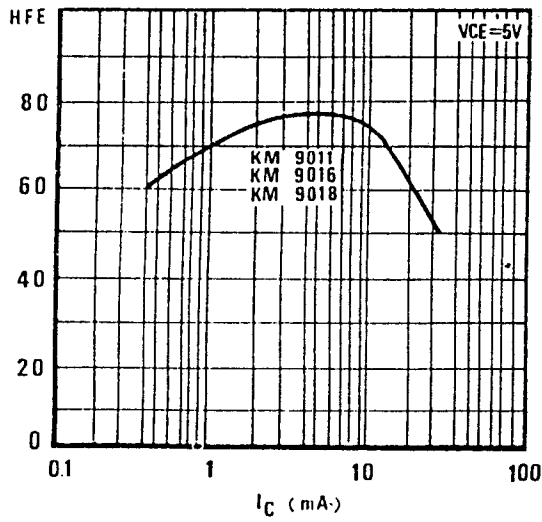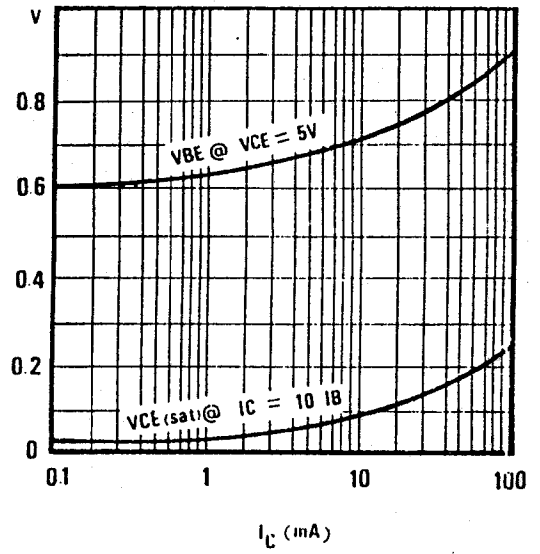

KM 9011
KM 9016
KM 9018

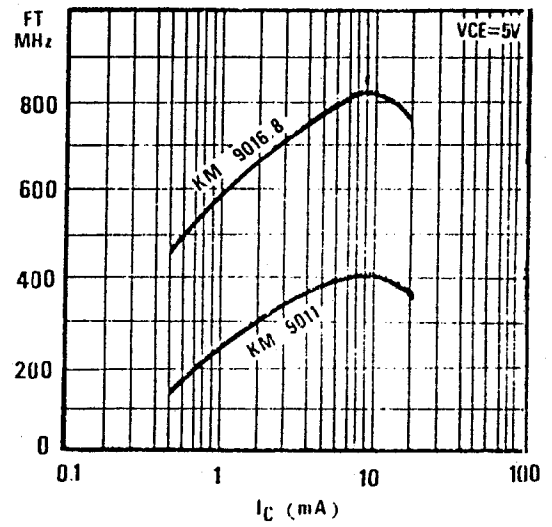

DEVICE SPECIFICATIONS [T_a = 25°C unless otherwise specified]

TYPE	MAXIMUM RATINGS					ELECTRICAL CHARACTERISTICS																
	V _{CE0} (V)	V _{EB0} (V)	P _D (mW)	HFE	I _{CB0} (nA)	V _{BE} (V)		I _C V _{CE} (mA) (V)		V _{CE(sat)} (V)		I _C I _B (mA) (mA)	f _T (MHz)		I _C V _{CE} (mA) (V)	C _{ob} (pF)		C _{trbb} / (pSec)				
	min	max	min	max	max	typ	max	typ	max	typ	max	typ	min	typ	typ	max	typ	max				
KM 9011	25	3	300	28	198	50	0.67	0.85	1	5	0.08	0.5	10	1	150	220	1	5	19	2.5	10	22
KM 9012	25	5	500	64	350	500	0.7	0.85	10	1	0.2	0.6	250	25								
KM 9013	25	5	500	64	350	500	0.7	0.85	10	1	0.2	0.6	250	25								
KM 9014	25	5	500	50	1000	50	0.63	0.85	1	5	0.07	0.5	10	1	50	140	1	5	2.7	6	10	
KM 9015	25	5	500	60	1000	50	0.64	0.85	1	5	0.07	0.5	10	1	50	120	1	5	3.5	6	10	
KM 9016	25	3	300	28	198	50	0.72	0.85	1	5	0.14	0.5	10	1	500	800	5	5	1.1	1.6	10	12
KM 9018	20	3	300	28	198	50	0.72	0.85	1	5	0.14	0.5	10	1	400	800	5	5	1.3	1.7	10	18

1/ : C_{trbb} @ I_C = 1 mA V_{CE} = 5V f = 31.8MHz

2/ : NF @ I_C = 1 mA V_{CE} = 5V R_G = 500Ω f = 1MHz

3/ : NF @ I_C = 0.1 mA V_{CE} = 5V R_G = 10kΩ f = 30 kHz to 15 kHz

4/ : NF @ I_C = 1 mA V_{CE} = 5V R_G = 50Ω f = 100 MHz

CLASSIFICATION OF HFE GROUPS

TYPE NO.	GROUP	A	B	C	D	E	F	G	H	I	@ IC / VC
KM 9011											
KM 9016					28 - 45	39 - 60	54 - 80	72 - 108	97 - 146	132 - 198	1 mA / 5V
KM 9018											
KM 9014		60 - 150	100 - 300	200 - 600	400 - 1000						1 mA / 5V
KM 9015											
KM 9012											
KM 9013					64 - 91	78 - 112	96 - 135	118 - 166	144 - 202	180 - 350	50 mA / 1V

