

TOSHIBA TRANSISTOR SILICON NPN EPITAXIAL TYPE (PCT PROCESS)


# RN1501, RN1502, RN1503, RN1504, RN1505, RN1506

SWITCHING, INVERTER CIRCUIT, INTERFACE CIRCUIT AND DRIVER CIRCUIT APPLICATIONS.


Unit in mm

- Including Two Devices in SMV (Super Mini Type with 5 leads)
- With Built-in Bias Resistors
- Simplify Circuit Design
- Reduce a Quantity of Parts and Manufacturing Process
- Complementary to RN2501~RN2506

### EQUIVALENT CIRCUIT AND BIAS RESISTOR VALUES

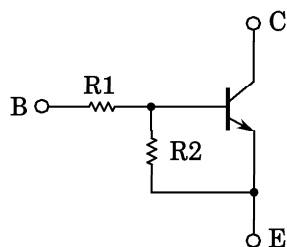

TYPE No.	R1 (kΩ)	R2 (kΩ)
RN1501	4.7	4.7
RN1502	10	10
RN1503	22	22
RN1504	47	47
RN1505	2.2	47
RN1506	4.7	47

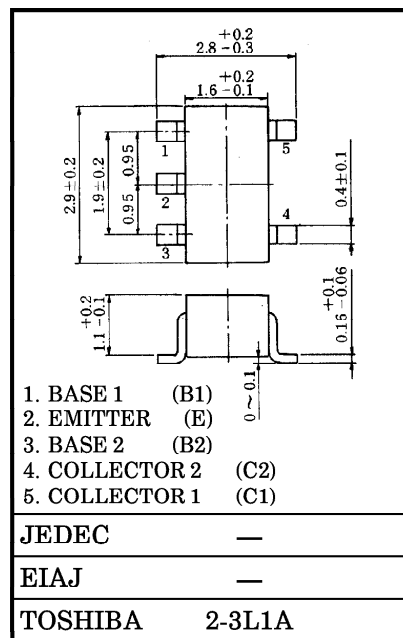


1. BASE 1 (B1)
2. EMITTER (E)
3. BASE 2 (B2)
4. COLLECTOR 2 (C2)
5. COLLECTOR 1 (C1)

JEDEC	—
EIAJ	—
TOSHIBA	2-3L1A

Weight : 6.8mg

### EQUIVALENT CIRCUIT (TOP VIEW)



### MAXIMUM RATINGS (Ta = 25°C) (Q1, Q2 COMMON)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	$V_{CB0}$	50	V
Collector-Emitter Voltage	$V_{CEO}$	50	V
Emitter-Base Voltage	$V_{EBO}$	10	V
		5	
Collector Current	$I_C$	100	mA
Collector Power Dissipation	$P_C^*$	300	mW
Junction Temperature	$T_j$	150	°C
Storage Temperature Range	$T_{stg}$	-55~150	°C

\* : Total Rating







961001EAA2

- TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.







ELECTRICAL CHARACTERISTICS (Ta = 25°C) (Q1, Q2 COMMON)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	RN1501~1506	ICBO	V <sub>CB</sub> = 50V, I <sub>E</sub> = 0	—	—	100	nA
		ICEO	V <sub>CE</sub> = 50V, I <sub>B</sub> = 0	—	—	500	
Emitter Cut-off Current	RN1501	I <sub>EBO</sub>	V <sub>EB</sub> = 10V, I <sub>C</sub> = 0	0.82	—	1.52	mA
	RN1502			0.38	—	0.71	
	RN1503			0.17	—	0.33	
	RN1504			0.082	—	0.15	
	RN1505		V <sub>EB</sub> = 5V, I <sub>C</sub> = 0	0.078	—	0.145	
	RN1506			0.074	—	0.138	
DC Current Gain	RN1501	h <sub>FE</sub>	V <sub>CE</sub> = 5V, I <sub>C</sub> = 10mA	30	—	—	
	RN1502			50	—	—	
	RN1503			70	—	—	
	RN1504			80	—	—	
	RN1505			80	—	—	
	RN1506			80	—	—	
Collector-Emitter Saturation Voltage	RN1501~1506	V <sub>CE (sat)</sub>	I <sub>C</sub> = 5mA I <sub>B</sub> = 0.25mA	—	0.1	0.3	V
Input Voltage (ON)	RN1501	V <sub>I (ON)</sub>	V <sub>CE</sub> = 0.2V I <sub>C</sub> = 5mA	1.1	—	2.0	V
	RN1502			1.2	—	2.4	
	RN1503			1.3	—	3.0	
	RN1504			1.5	—	5.0	
	RN1505			0.6	—	1.1	
	RN1506			0.7	—	1.3	
Input Voltage (OFF)	RN1501~1504	V <sub>I (OFF)</sub>	V <sub>CE</sub> = 5V I <sub>C</sub> = 0.1mA	1.0	—	1.5	V
	RN1505, 1506			0.5	—	0.8	
Transition Frequency	RN1501~1506	f <sub>T</sub>	V <sub>CE</sub> = 10V, I <sub>C</sub> = 5mA	—	250	—	MHz
Collector Output Capacitance	RN1501~1506	C <sub>ob</sub>	V <sub>CB</sub> = 10V, I <sub>E</sub> = 0, f = 1MHz	—	3	6	pF
Input Resistor	RN1501	R <sub>1</sub>		3.29	4.7	6.11	kΩ
	RN1502			7	10	13	
	RN1503			15.4	22	28.6	
	RN1504			32.9	47	61.1	
	RN1505			1.54	2.2	2.86	
	RN1506			3.29	4.7	6.11	
Resistor Ratio	RN1501~1504	R <sub>1</sub> / R <sub>2</sub>		0.9	1.0	1.1	
	RN1505			0.0421	0.0468	0.0515	
	RN1506			0.09	0.1	0.11	







(Q1, Q2 COMMON)

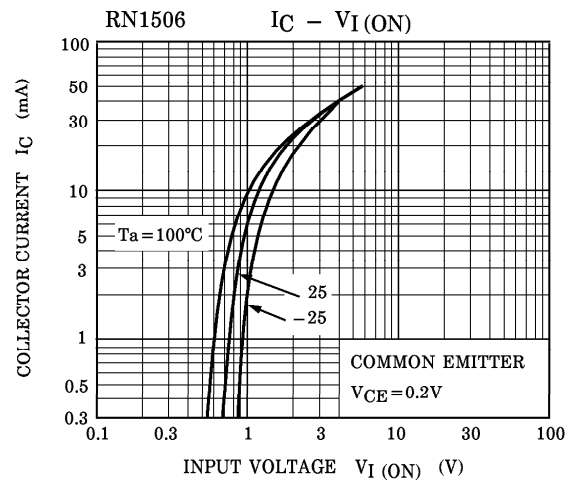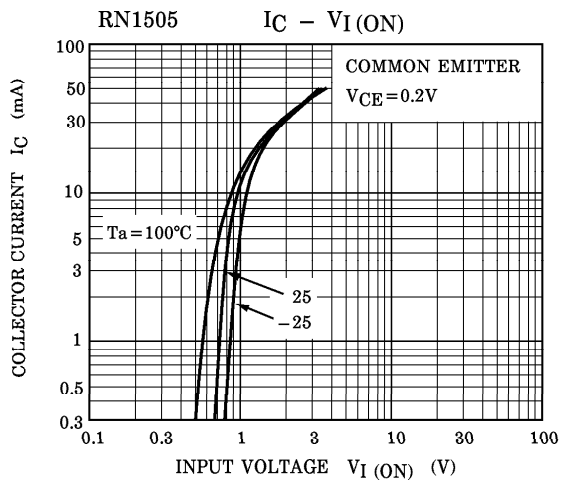
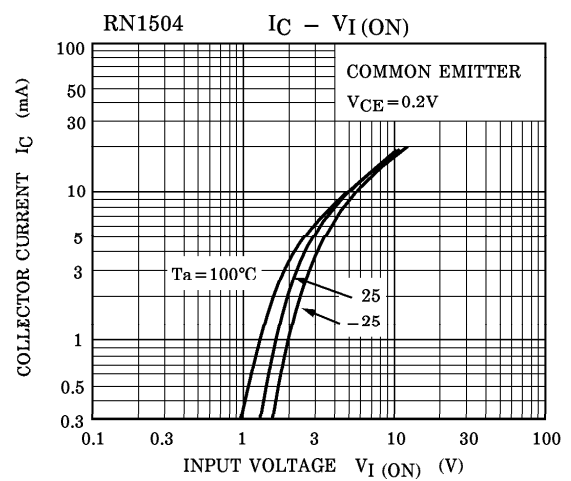
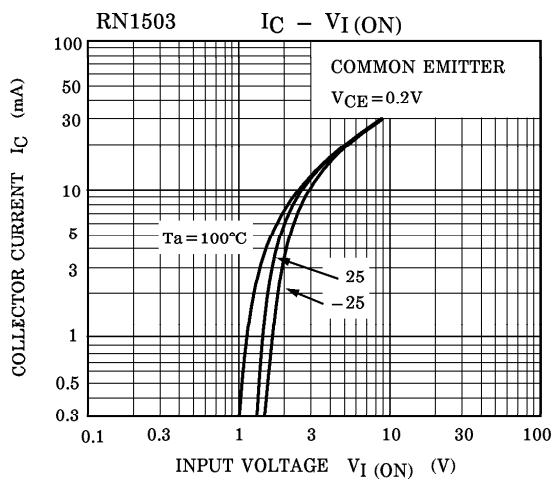
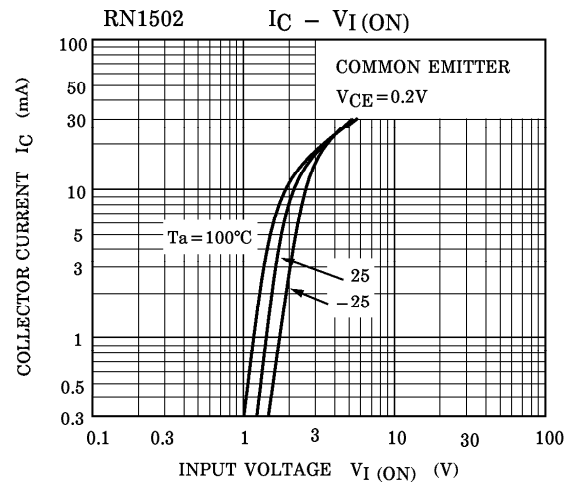
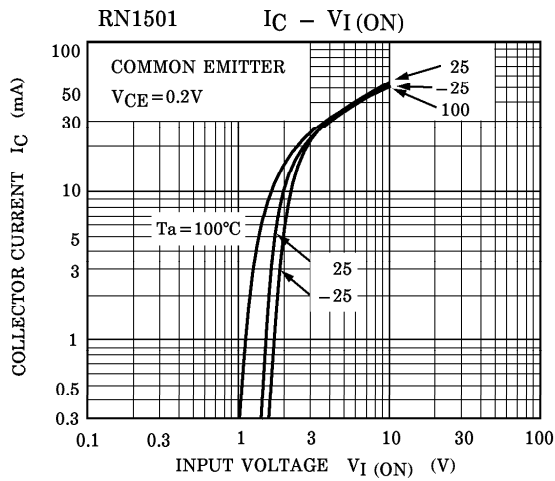


(Q1, Q2 COMMON)

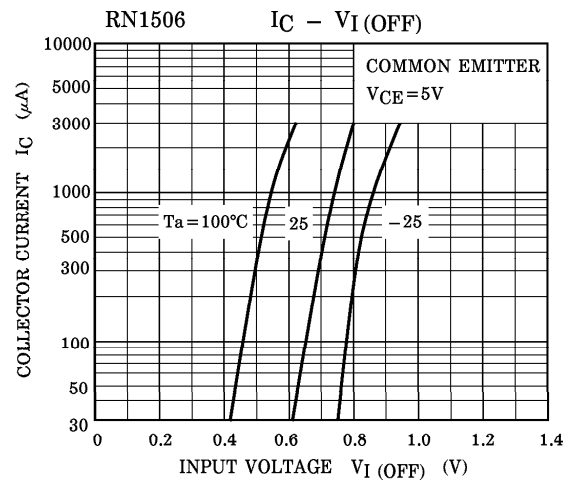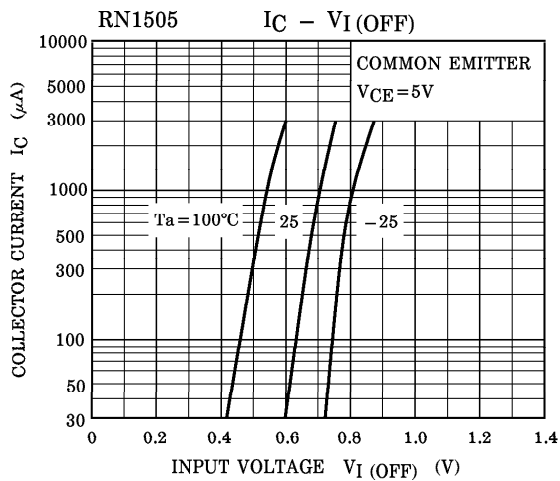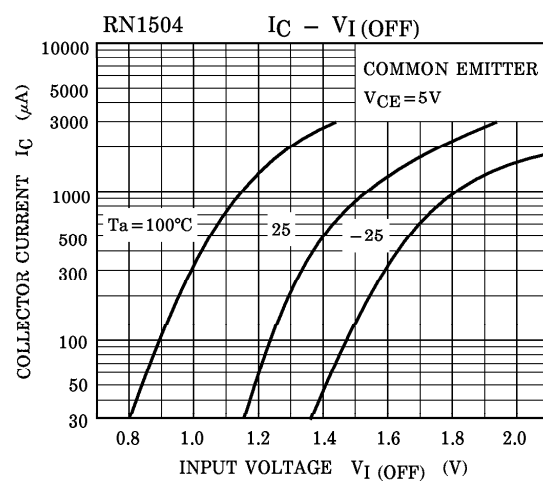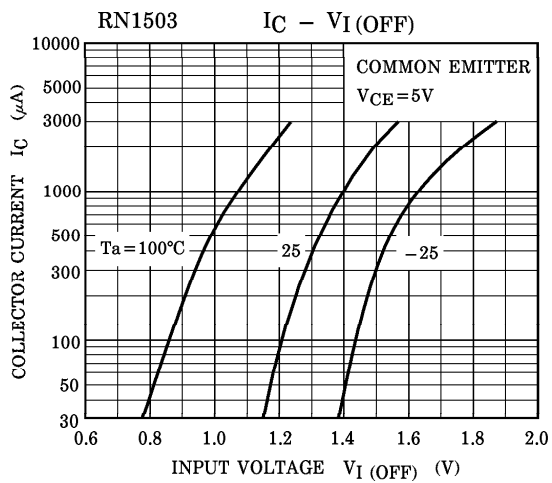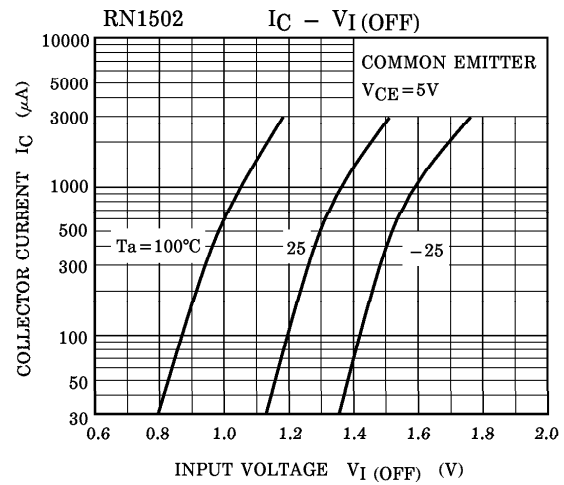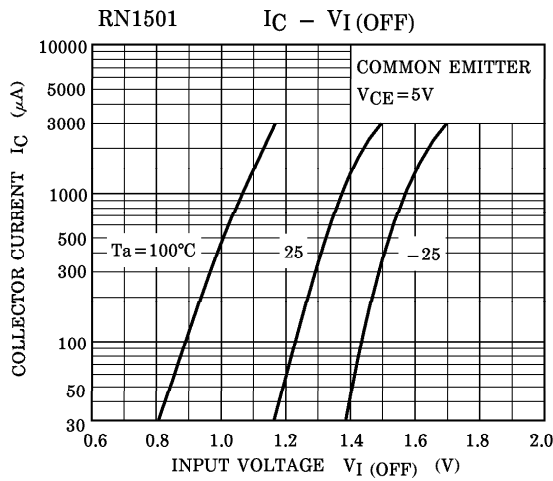

(Q1, Q2 COMMON)

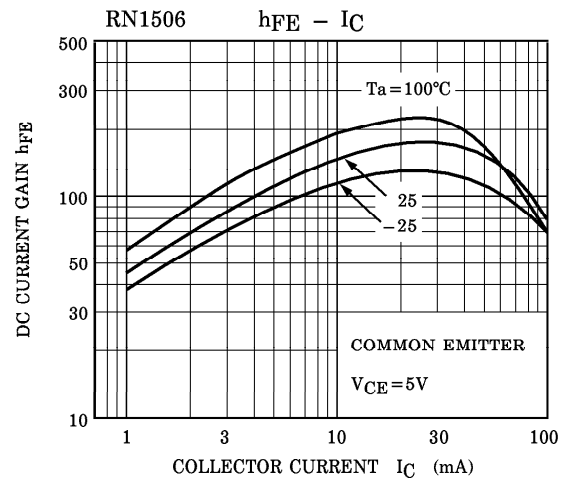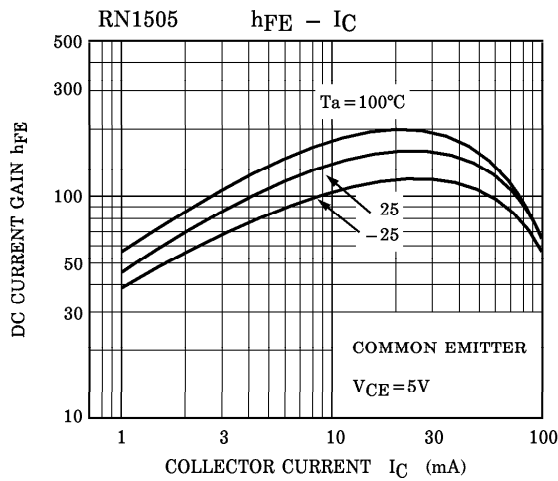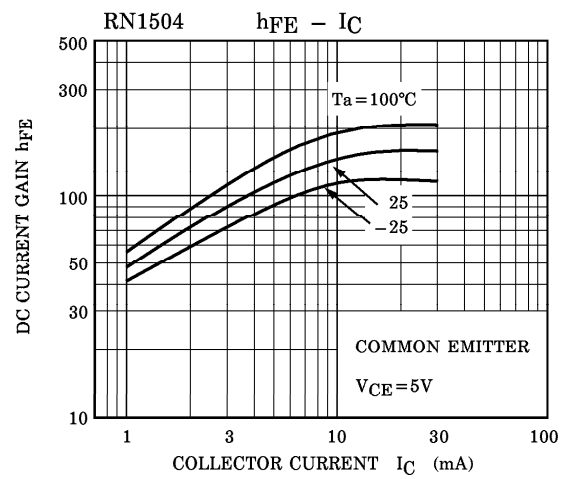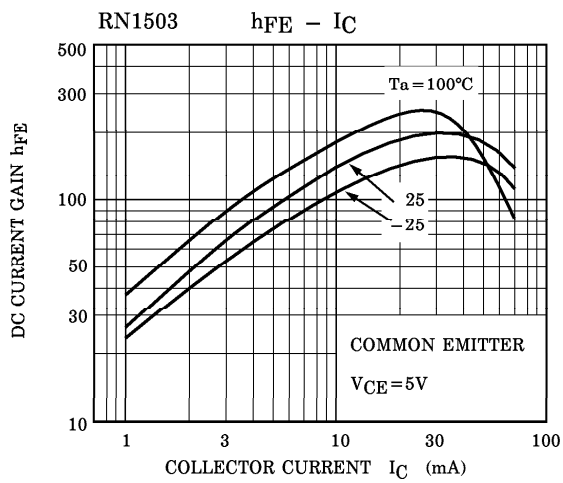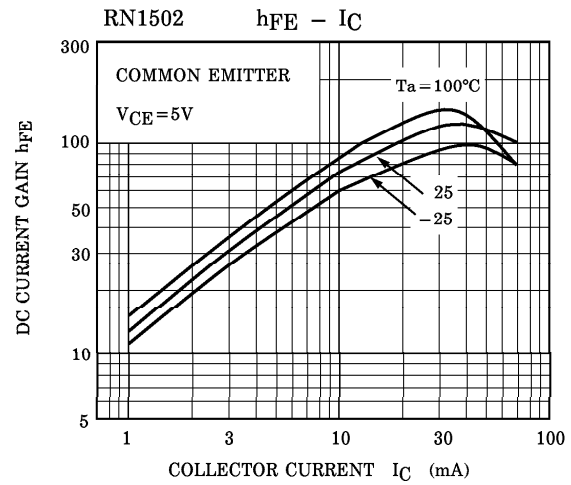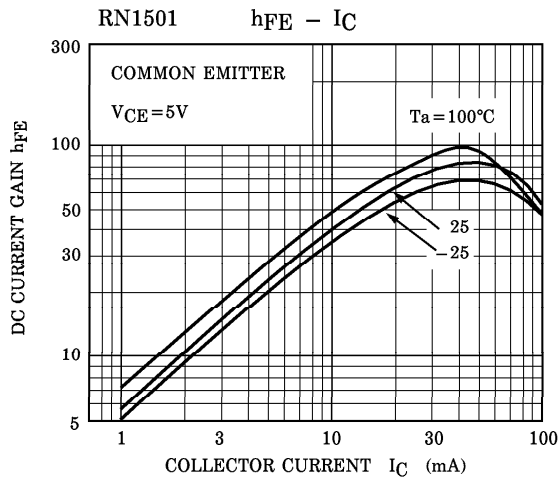

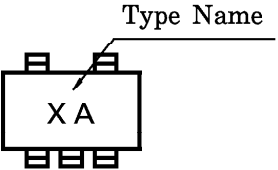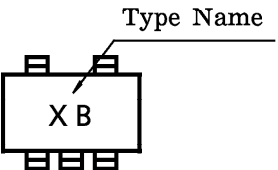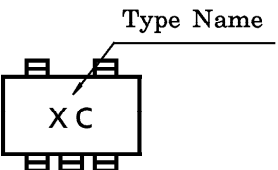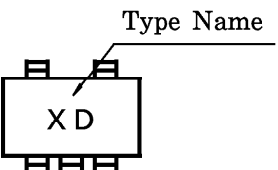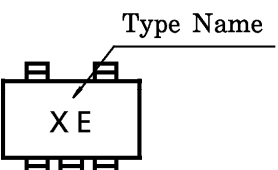TYPE NAME	MARKING
RN1501	
RN1502	
RN1503	
RN1504	
RN1505	
RN1506	