

MCC

Micro Commercial Components
21201 Itasca Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

**SF21
THRU
SF26**

Features

- High reliability
- High current capability
- Low forward voltage drop
- High surge capability

Maximum Ratings

- Operating Temperature: -55°C to +125°C
- Storage Temperature: -55°C to +150°C
- For capacitive load, derate current by 20%

| MCC Part Number | Maximum Recurrent Peak Reverse Voltage | Maximum RMS Voltage | Maximum DC Blocking Voltage |
|-----------------|--|---------------------|-----------------------------|
| SF21 | 50V | 35V | 50V |
| SF22 | 100V | 70V | 100V |
| SF23 | 150V | 105V | 150V |
| SF24 | 200V | 140V | 200V |
| SF25 | 300V | 210V | 300V |
| SF26 | 400V | 280V | 400V |


Electrical Characteristics @ 25°C Unless Otherwise Specified

| | | | |
|---|-------------|----------------|---|
| Average Forward Current | $I_{F(AV)}$ | 2.0A | $T_C = 55^\circ C$ |
| Peak Forward Surge Current | I_{FSM} | 50A | 8.3ms, half sine |
| Maximum Instantaneous Forward Voltage SF21-SF24 SF25-SF26 | V_F | | $I_{FM} = 2.0A; T_C = 25^\circ C$ |
| | | 0.95V 1.3V | |
| Maximum DC Reverse Current At Rated DC Blocking Voltage | I_R | 5.0uA 100uA | $T_C = 25^\circ C$ $T_C = 100^\circ C$ |
| Typical Junction Capacitance SF21-SF24 SF25-SF26 | C_J | 60pF 30pF | Measured at 1.0MHz, $V_R=4.0V$ |
| Maximum Reverse Recovery Time | T_{RR} | 35nS | $I_F=0.5A, I_R=1.0A, I_{RR}=0.25A$ |

Pulse Test: Pulse width 300 usec, Duty cycle 1%.

**2.0 Amp Super Fast Rectifier
50 to 400 Volts**

DO-15

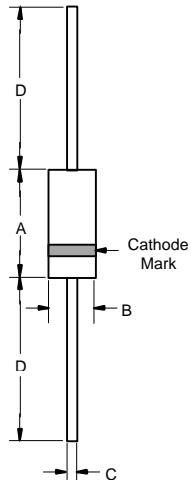


| DIM | DIMENSIONS | | | | NOTE |
|-----|------------|------|-------|------|------|
| | INCHES | | MM | | |
| | MIN | MAX | MIN | MAX | |
| A | .230 | .300 | 5.80 | 7.60 | |
| B | .104 | .140 | 2.60 | 3.60 | |
| C | .026 | .034 | .70 | .90 | |
| D | 1.000 | --- | 25.40 | --- | |

SF21 thru SF26


•M•C•C•

Figure 1
Typical Reverse Characteristics

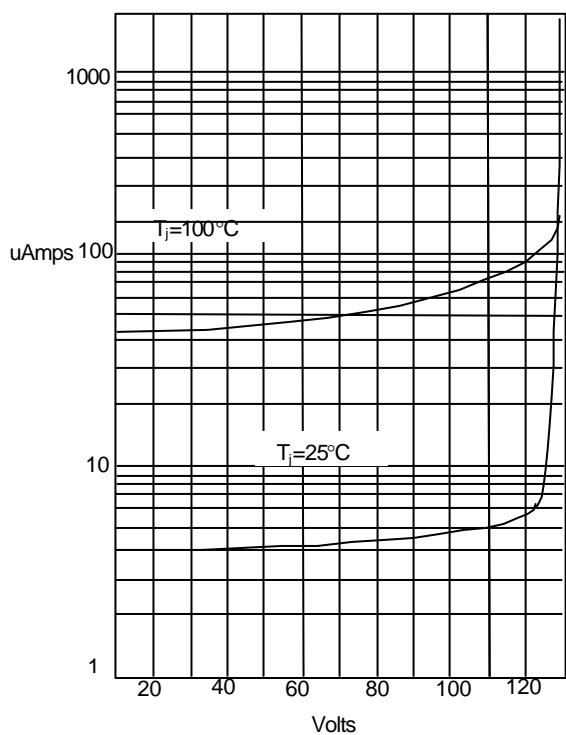


Instantaneous Reverse Current - uAmperes versus
Percent of Rated Peak Reverse Voltage - %

Figure 2
Typical Forward Characteristics

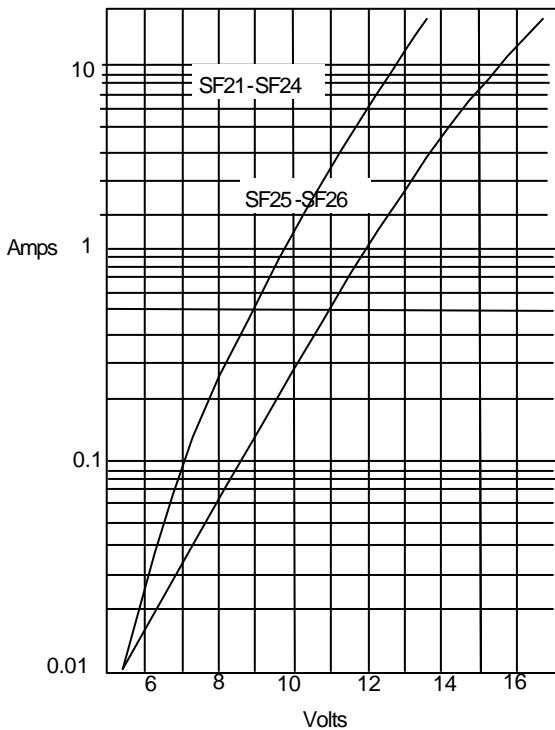

Instantaneous Forward Current - Amperes versus
Instantaneous Forward Voltage - Volts

Figure 3
Forward Derating Curve

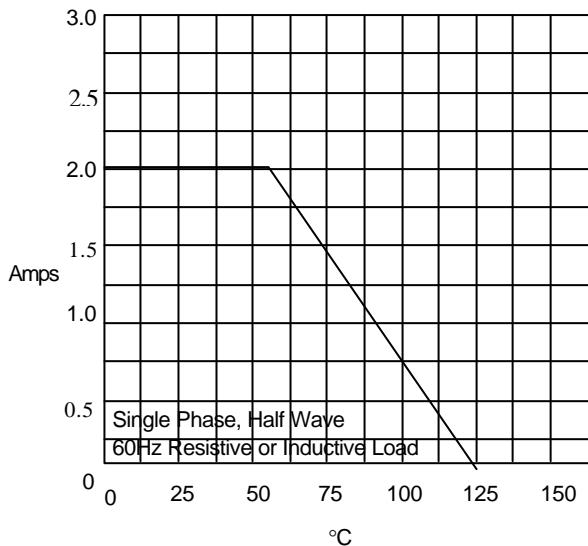

Average Forward Rectified Current Per Leg - Amperes versus
Case Temperature - °C

SF21 thru SF26

•M•C•C•



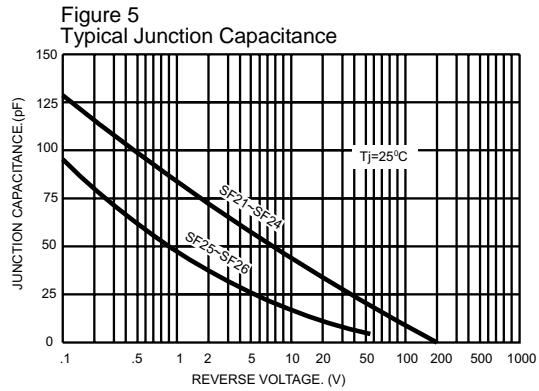


Figure 6
Reverse Recovery Time Characteristic And Test Circuit Diagram

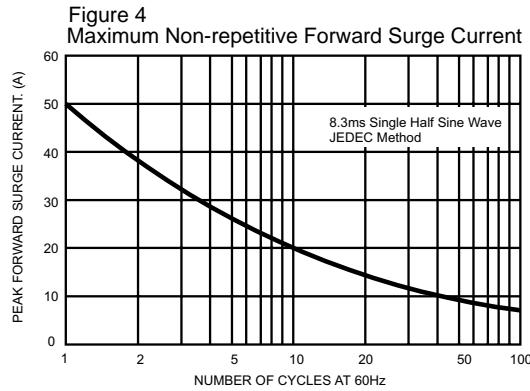

Notes:

1. Rise Time = 7ns max.
- Input impedance = 1 megohm, 22pF
2. Rise Time = 10ns max.
- Source impedance = 50 ohms
3. Resistors are non-inductive

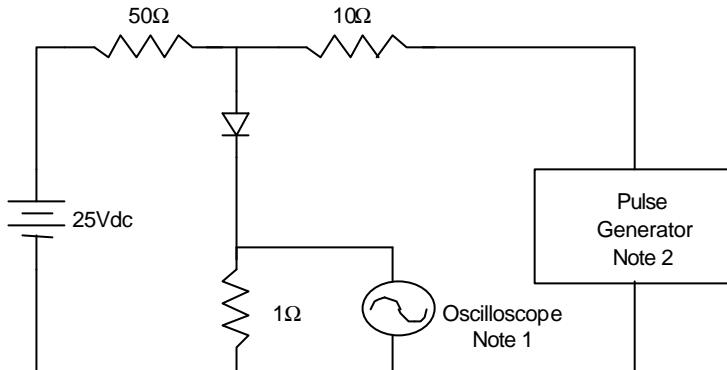