## QUARTZ CRYSTAL OSCILLATOR

#### GENERAL DESCRIPTION

The NJU6319 series is a C-MOS quartz crystal oscillator which contains of an oscillation amplifier, 3-stage divider and 3-state output buffer.

The oscillation frequency is as wide as up to 50MHz and the symmetry of 45-55% is realized over full oscillation frequency range.

The oscillation amplifier incorporates feed-back resistance and oscillation capacitors (Cg, Cd), therefore, it requires no external component expect quartz crystal and operating voltage is correspondence of 3V.

The 3-stage divider generates  $f_0$ ,  $f_0/2$ ,  $f_0/4$  and  $f_0/8$  and only one frequency selected by internal circuits is output.

The 3-state output buffer is C-MOS compatible and capable of 10 LSTTL driving.

#### ■ FEATURES

- Operating Voltage -- 2.7~6.0V
- Maximum Oscillation Frequency -- 50MHz
- Low Operating Current
   High Fan-out
   LSTTL 10
- High Fan-out
  3-state Output Buffer
- Selected Frequency Output (mask option)

Only one frequency out of  $f_0$ ,  $f_0/2$ ,  $f_0/4$ and  $f_0/8$  output

- Oscillation Capacitors Cg and Cd on-chip
- Oscillation Output Stand-by Function
- Package Outline -- Chip/EMP/VSP 8
- C-MOS Technology

#### LINE-UP TABLE

Type No.	Output Frequency	Cg	Cd
NJU6319A	f∘	23pF	23pF
NJU6319B	f∘/2	23pF	23pF
NJU6319C	f∘/4	23pF	23pF
NJU6319D	f∘/8	23pF	23pF
NJU6319P	f∘	No	No






NJU6319XC

NJU6319XE

NJU6319XR

#### PAD LOCATION/PIN CONFIGURATION




|--|

Unit:um

-						
	No. PAD		X	Y		
	1	CONT	350	655		
	2	XT	130	630		
	3	XT	140	175		
	4	Vss	300	130		
	5	Fout	1185	145		
	6	NC	-	-		
	7	NC	-	_		
	8	VDD	1185	650		

Chip Size : 1.33 X 0.8mm Chip Thickness : 400±30um Note1)No.6 and 7 terminals are only for package type information. There are no PAD on the chip.

### BLOCK DIAGRAM

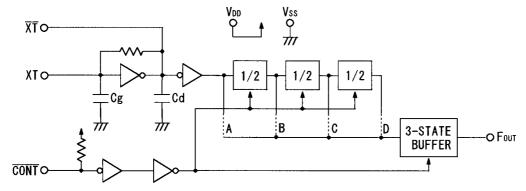

### ■ TERMINAL DESCRIPTION

No.	SYMBOL	FUNCTION
		3-State Output Control and Divider Reset
		CONT Four
1	CONT	H or Output either one frequency from $f_0$ , $f_0/2$ , $f_0/4$ and $f_0/8$ (Note2)
		L Output High Impedance and Divider Reset
2 3	XT XT	Quartz Crystal Connecting terminals
4	Vss	GND
5	Fout	Output either one frequency from fo, fo/2, fo/4 and fo/8
8	VDD	+3V/+5V

Note2) Refer to Line-Up Table.

## ABSOLUTE MAXIMUM RATINGS

		( T	a=25°C )
PARAMETER	SYMBOL.	RATINGS	UNIT
Supply Voltage	VDD	-0.5 ~ +7.0	V
Input Voltage	VIN	$V_{ss} = 0.5 \sim V_{DD} = 0.5$	V
Output Voltage	٧o	-0.5 ~ V <sub>▷▷</sub> +0.5	V
Input Current	· IIN	±10	mA
Output Current	١o	±25	mA
Power Dissipation	P⊳	200 (EMP) 320 (VSP)	mW
Operating Temperature Range	Topr	-40 ~ + 85	°C
Storage Temperature Range	Tstg	-65 ~ +150	°C

Note) Decoupling capacitor should be connected between  $V_{\text{DD}}$  and  $V_{\text{SS}}$  due to the stabilized operation for the circuit.

-New Japan Radio Co., Ltd.-

#### ELECTRICAL CHARACTERISTICS

(Ta=25°C)

						,
PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Operating Voltage	VDD		2. 7		6. 0	۷

(V<sub>DD</sub>=3V, Ta=25°C)

PARAMETER	SYMBOL	CONDITIONS	6	MIN	TYP	MAX	UNIT
Operating Current	Ισσ	fosc=16MHz, No load N	lote3			8	mA
Stand-by Current	lst	CONT,XT=Vss,No load N	lote4			1	uA
Input Voltage	ViH			2. 7		3. 0	v
Thput Voltage	Vil			0		0. 3	l v
Output Current	Іон	Vон=2. 7V		1			mA
	01	V₀⊥=0. 3V		1			
Input Current	I I N	CONT=Vss			*****	400	uA
3-st. Offleakage Current	loz	CONT=Vss, Four=Vod or V	lss			±0.1	uA
Internal Capacitor	Cg, Cd	Ν	lote5		23		pF
Max. Oscillation Freq.	fмах	Ν	lote3	50			MHz
Output Signal Symmetry	SYM	C∟=15pF at 1/2V⊳⊳		45	50	55	%
Output Signal Rise Time	t,	C⊾=15pF, 20%–80%				8	ns
Output Signal Fall Time	tr	C⊾=15pF, 80%-20%				8	ns

(V<sub>DD</sub>=5V, Ta=25°C)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNIT
Operating Current	loo	fosc=16MHz, No load No	ote3			15	mA
Stand-by Current	lst	CONT=XT=Vss,No load No	ote4			1	uA
Input Voltago	Vтн			2. 0		5.0	v
Input Voltage	V <sub>1L</sub>			0		0.8	v
Output Current	Іон	V₀н=4. 5V		4			mA
	Ιοι	V₀∟=0.5V		4			
Input Current	l i n	CONT=Vss				400	uA
3-st. Offleakage Current	loz	CONT=Vss, Four=Vpd or Vs	s s			±0.1	uA
Internal Capacitor	Cg, Cd	No	ote5		23		pF
Max. Oscillation Freq.	fмах	No	ote3	50			MHz
Output Signal Symmetry	SYM	C∟=15pF at 1/2V⊳⊳		45	50	55	%
Output Signal Rise Time	t,	CL=15pF, 20% - 80%				8	ns
Output Signal Fall Time	t،	C∟=15pF, 80% - 20%				8	ns

Note3) Only P version is measured with external capacitors contained 18pF for Cg and 16pF for Cd.


Note4) Excluding input current on CONT terminal.

Note5) P version is not mentioned due to internal oscillation capacitors Cg and Cd separated.


## JRC

### MEASUREMENT CIRCUITS

(1) Output Signal Symmetry ( $C_L=15pF$ )

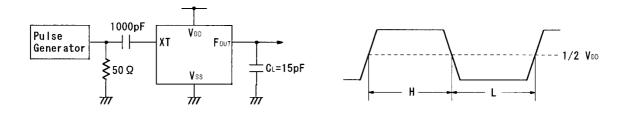

(2) Output Signal Rise/Fall Time (CL=15pF)

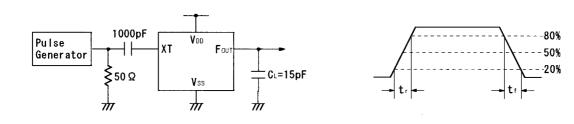

## New Japan Radio Co., Ltd.-

# MEMO

[CAUTION] The specifications on this databook are only given for information , without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.