

DESCRIPTION

The LX5218 SCSI terminator is part of Linfinity's UltraMAX family of high-performance, adaptive, non-linear mode SCSI products, which are designed to deliver true UltraSCSI performance in SCSI applications. The low voltage BiCMOS architecture employed in their design offers superior performance to older linear passive and active techniques. Linfinity's UltraMAX architecture employs high-speed adaptive elements for each channel, thereby providing the fastest response possible — typically 35MHz, which is 100 times faster than the older linear regulator/terminator approach used by other manufacturers. Products using this older linear regulator approach have bandwidths which are dominated by the output capacitor and which are limited to 500KHz (see further discussion in the Functional Description section). The UltraMAX architecture also eliminates the output compensation capacitor typical in earlier terminator designs. It is approved for use with SCSI-1, -2, -3, UltraSCSI and beyond — providing the highest performance alternative available today.

Another key improvement offered by the LX5218 lies in its ability to insure reliable, error free communications even in systems which do not adhere to recommended SCSI hardware design guidelines, such as the use of improper cable lengths and

impedances. Frequently, this situation is not controlled by the peripheral or host designer and, when problems occur, they are the first to be made aware of the problem. The LX5218 architecture is much more tolerant of marginal system integrations.

The LX5218 has two disconnect pins for SCSI Plug and Play (PnP) applications. Quiescent current is typically less than (275µA) in disable mode, while the output capacitance is also less than 3pF. The obvious advantage of extended battery life for portable systems is inherent in the product's sleep-mode feature. Additionally, the disable function permits factory-floor or production-line configurability, reducing inventory and product-line diversity costs. Field configurability can also be accomplished without physically removing components which, often times results in field returns due to mishandling.

Reduced component counts is also inherent in the LX5218 architecture. Traditional termination techniques require large stabilization and transient protection capacitors of up to 20µF in value and size. The LX5218 architecture does not require these components, allowing all the cost savings associated with inventory, board space, assembly, reliability, and component costs.


KEY FEATURES

- SCSI PLUG AND PLAY, DUAL LOW DISCONNECT, LOGIC LOW COMMAND DISCONNECTS ALL TERMINATION LINES
- HOT SWAP COMPATIBLE
- ULTRA-FAST RESPONSE FOR FAST-20 SCSI APPLICATIONS
- 35MHz CHANNEL BANDWIDTH
- 3.5V OPERATION
- LESS THAN 3pF OUTPUT CAPACITANCE
- DISABLE-MODE CURRENT LESS THAN 275µA
- THERMALLY SELF LIMITING
- NO EXTERNAL COMPENSATION CAPACITORS
- IMPLEMENTS 8-BIT OR 16-BIT (WIDE) APPLICATIONS
- COMPATIBLE WITH ACTIVE NEGATION DRIVERS (60mA / CHANNEL)
- COMPATIBLE WITH PASSIVE AND ACTIVE TERMINATIONS
- APPROVED FOR USE WITH SCSI-1, -2, -3 AND ULTRASCSI
- CONSULT FACTORY FOR APPLICATION TEST REPORT



IMPORTANT: For the most current data, consult Linfinity's web site: <http://www.linfinity.com>.

PRODUCT HIGHLIGHT

RECEIVING WAVEFORM - 20MHz

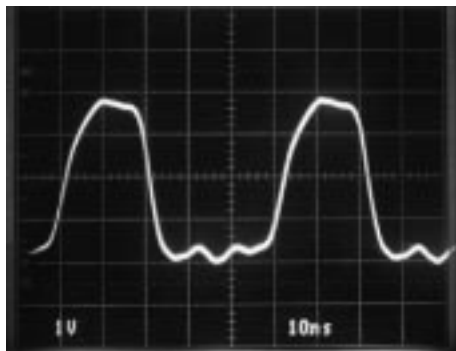

DRIVING WAVEFORM - 20MHz

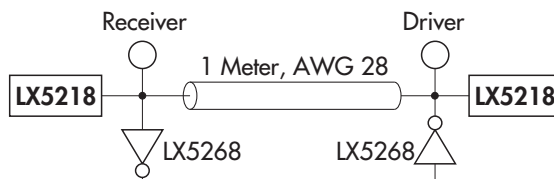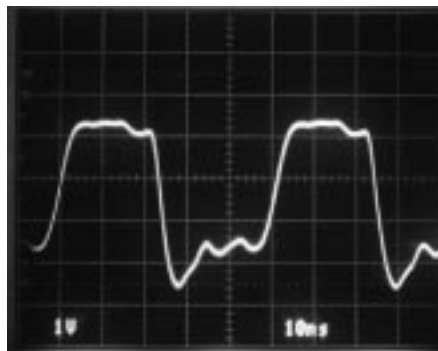

NOTE:
For An In-Depth Discussion On Applying SCSI, Request Linfinity Application Note: "Understanding The Single-Ended SCSI Bus"

PACKAGE ORDER INFORMATION

| T _J (°C) | DW Plastic SOWB 16-pin | PW Plastic TSSOP 20-pin |
|---------------------|------------------------|-------------------------|
| 0 to 70 | LX5218CDW | LX5218CPW |

Note: All surface-mount packages are available in Tape & Reel. Append the letter "T" to part number. (i.e. LX5218CDWT)

9-CHANNEL PLUG AND PLAY SCSI TERMINATOR

PRODUCTION DATA SHEET

ABSOLUTE MAXIMUM RATINGS (Note 1)

| | |
|--|-----------------|
| Continuous Termination Voltage | 10V |
| Continuous Output Voltage Range | 0 to 5.5V |
| Continuous Disable Voltage Range | 0 to 5.5V |
| Operating Junction Temperature | 0°C to 125°C |
| Storage Temperature Range | -65°C to +150°C |
| Solder Temperature (Soldering, 10 seconds) | 300°C |

Note 1. Exceeding these ratings could cause damage to the device.

THERMAL DATA

DW PACKAGE:


| | |
|---|---------------|
| THERMAL RESISTANCE-JUNCTION TO AMBIENT, θ_{JA} | 95°C/W |
|---|---------------|

PW PACKAGE:


| | |
|---|----------------|
| THERMAL RESISTANCE-JUNCTION TO AMBIENT, θ_{JA} | 144°C/W |
|---|----------------|

Junction Temperature Calculation: $T_J = T_A + (P_D \times \theta_{JA})$.
 The θ_{JA} numbers are guidelines for the thermal performance of the device/pc-board system.
 All of the above assume no ambient airflow.

PACKAGE PIN OUTS

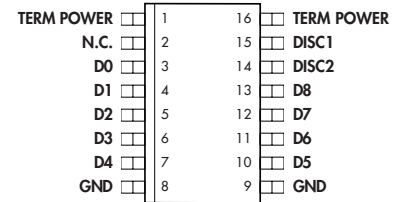

DW PACKAGE
(Top View)

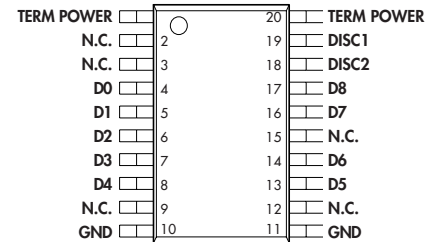

PW PACKAGE
(Top View)

9-CHANNEL PLUG AND PLAY SCSI TERMINATOR

PRODUCTION DATA SHEET

RECOMMENDED OPERATING CONDITIONS (Note 2)

| Parameter | Symbol | Recommended Operating Conditions | | | Units |
|--|------------|----------------------------------|------|------------|-------|
| | | Min. | Typ. | Max. | |
| Termination Voltage | V_{TERM} | 3.5 | | 5.5 | V |
| High Level Disable Input Voltage | V_{RH} | 2 | | V_{TERM} | V |
| Low Level Disable Input Voltage | V_{RL} | 0 | | 0.8 | V |
| Operating Virtual Junction Temperature Range | | | | | |
| LX5218C | | 0 | | 125 | °C |

Note 2. Range over which the device is functional.

ELECTRICAL CHARACTERISTICS


Term Power = 4.75V unless otherwise specified. Unless otherwise specified, these specifications apply at the recommended operating ambient temperature of $T_A = 25^\circ\text{C}$. Low duty cycle pulse testing techniques are used which maintains junction and case temperatures equal to the ambient temperature.

| Parameter | Symbol | Test Conditions | LX5218 | | | Units |
|---------------------------------------|------------|---|--------|------|------|---------------|
| | | | Min. | Typ. | Max. | |
| Output High Voltage | V_{OUT} | | 2.65 | 2.85 | | V |
| TermPwr Supply Current | I_{CC} | All data lines = open | | 6 | 9 | mA |
| | | All data lines = 0.5V | | 215 | 225 | mA |
| | | DISC1 Pin = DISC2 Pin = 0V | | 275 | | μA |
| Output Current | I_{OUT} | $V_{OUT} = 0.5\text{V}$ | -21 | -23 | -24 | mA |
| Disable Input Current | I_{IN} | DISC1 Pin = DISC2 Pin = 4.75V | | 90 | | μA |
| | | DISC1 Pin = DISC2 Pin = 0V | | -10 | | nA |
| Output Leakage Current | I_{OL} | DISC1 Pin = DISC2 Pin = 0V, $V_O = 0.5\text{V}$ | | 10 | | nA |
| Capacitance in Disabled Mode | C_{OUT} | $V_{OUT} = 0\text{V}$, frequency = 1MHz | | 3 | | pF |
| Channel Bandwidth | BW | | | 35 | | MHz |
| Termination Sink Current, per Channel | I_{SINK} | $V_{OUT} = 4\text{V}$ | | 60 | | mA |

9-CHANNEL PLUG AND PLAY SCSI TERMINATOR

PRODUCTION DATA SHEET

BLOCK DIAGRAM

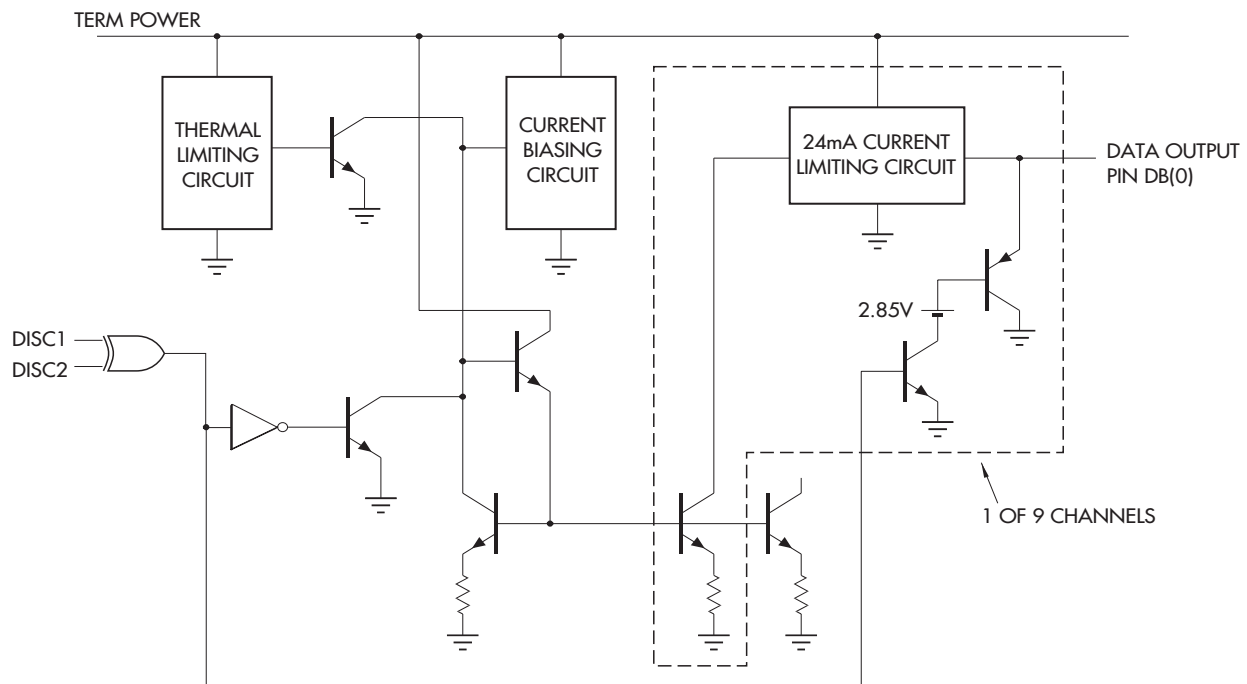

FUNCTIONAL DESCRIPTION

Cable transmission theory suggests to optimize signal speed and quality, the termination should act both as an ideal voltage reference when the line is released (deasserted) and as an ideal current source when the line is active (asserted). Common active terminators, which consist of Linear Regulators in series with resistors (typically 110Ω), are a compromise. As the line voltage increases, the amount of current decreases linearly by the equation $V = I * R$. The LX5218, with its unique new architecture applies the maximum amount of current regardless of line voltage until the termination high threshold (2.85V) is reached.

Acting as a near ideal line terminator, the LX5218 closely reproduces the optimum case when the device is enabled. To enable the device the DISC1 and DISC2 Pins must be pulled logic **High**, **Open**, or any combination of both **High** and **Low**. During this mode of operation, quiescent current is 6mA and the device will

respond to line demands by delivering 24mA on assertion and by imposing 2.85V on deassertion. In order to disable the device, the DISC1 and DISC2 pins must be driven logic **Low**. This mode of operation places the device in a sleep state where

a meager 275µA of quiescent current is consumed. Additionally, all outputs are in a Hi-Z (impedance) state. Sleep mode can be used for power conservation or to completely eliminate the terminator from the SCSI chain. In the second case, termination node capacitance is important to consider. The terminator will appear as a parasitic distributed capacitance on the line, which can detract from bus performance. For this reason, the

LX5218 has been optimized to have only 3pF of capacitance per output in the sleep state.

An additional feature of the LX5218 is its compatibility with active negation drivers. The device handles up to 60mA of sink current for drivers which exceed the 2.85V output high.

POWER UP / POWER DOWN FUNCTION TABLE

| DISC1 | DISC2 | Outputs | Quiescent Current |
|-------|-------|----------|-------------------|
| H | H | Enabled | 6mA |
| H | L | Enabled | 6mA |
| L | H | Enabled | 6mA |
| L | L | Disabled | 275µA |
| Open | Open | Enabled | 6mA |

9-CHANNEL PLUG AND PLAY SCSI TERMINATOR

P R O D U C T I O N D A T A S H E E T

▶ **GRAPH / CURVE INDEX****Waveforms****FIGURE #**

- 1A. RECEIVING WAVEFORM (Freq. = 1.0MHz)
- 1B. DRIVING WAVEFORM
- 2A. RECEIVING WAVEFORM (Freq. = 5.0MHz)
- 2B. DRIVING WAVEFORM
- 3. 10MHz WAVEFORM
- 4. 20MHz WAVEFORM

Characteristic Curves**FIGURE #**

- 5. OUTPUT HIGH VOLTAGE vs. JUNCTION TEMPERATURE
- 6. OUTPUT CURRENT vs. JUNCTION TEMPERATURE
- 7. OUTPUT CURRENT vs. OUTPUT HIGH VOLTAGE ($V_T = 4.75V$)
- 8. OUTPUT CURRENT vs. OUTPUT HIGH VOLTAGE ($V_T = 3.3V$)
- 9. TERMINATION VOLTAGE vs. SUPPLY CURRENT
- 10. TERMPWR SUPPLY CURRENT vs. TERMINATION VOLTAGE (Disabled)
— LX5218
- 11. OUTPUT HIGH VOLTAGE vs. JUNCTION TEMPERATURE ($V_T = 3.3V$)
- 12. OUTPUT CURRENT vs. JUNCTION TEMPERATURE ($V_T = 3.3V$)
- 13. OUTPUT HIGH VOLTAGE vs. TERMINATION VOLTAGE
- 14. OUTPUT CURRENT vs. TERMINATION VOLTAGE
- 15. OUTPUT CURRENT MATCHING CHANNEL TO CHANNEL

▶ **FIGURE INDEX****Application Circuits****FIGURE #**

- 16. 8-BIT SCSI SYSTEM APPLICATION

9-CHANNEL PLUG AND PLAY SCSI TERMINATOR

PRODUCTION DATA SHEET

CHARACTERISTIC CURVES

FIGURE 1A. — RECEIVING WAVEFORM



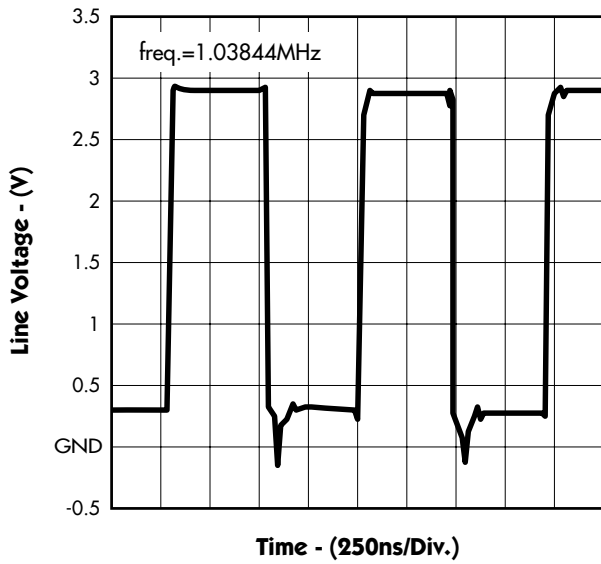


FIGURE 1B. — DRIVING WAVEFORM

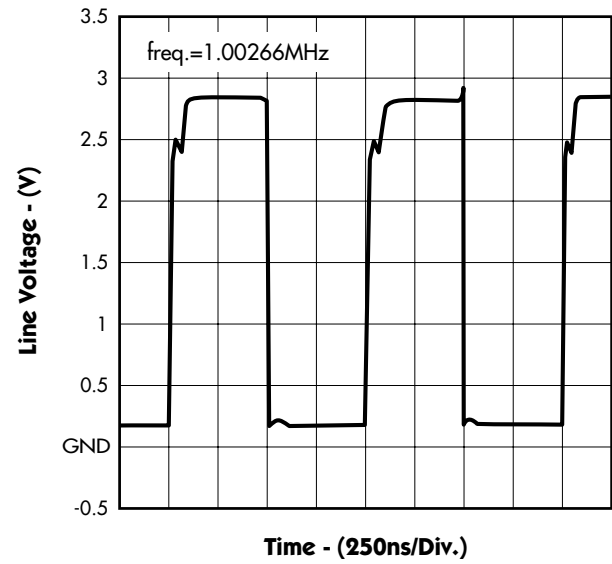

END-DRIVEN CABLE

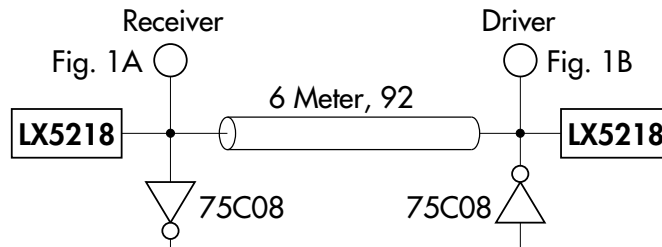

9-CHANNEL PLUG AND PLAY SCSI TERMINATOR

PRODUCTION DATA SHEET

CHARACTERISTIC CURVES

FIGURE 2A. — RECEIVING WAVEFORM



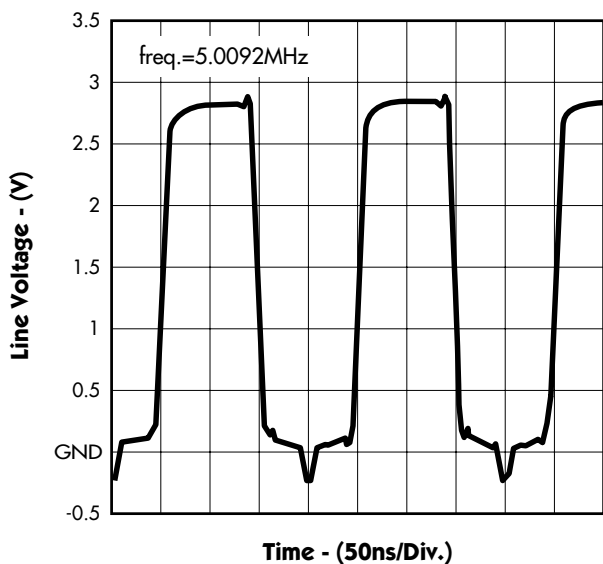


FIGURE 2B. — DRIVING WAVEFORM

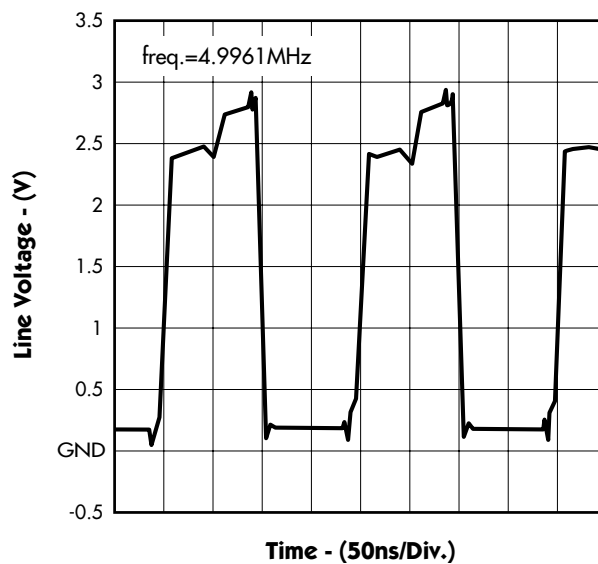

END-DRIVEN CABLE

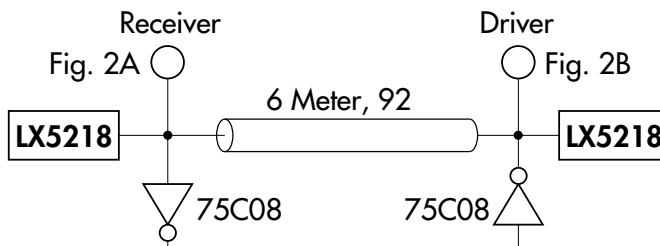

9-CHANNEL PLUG AND PLAY SCSI TERMINATOR

PRODUCTION DATA SHEET

CHARACTERISTIC CURVES

FIGURE 3. — 10MHz WAVEFORM



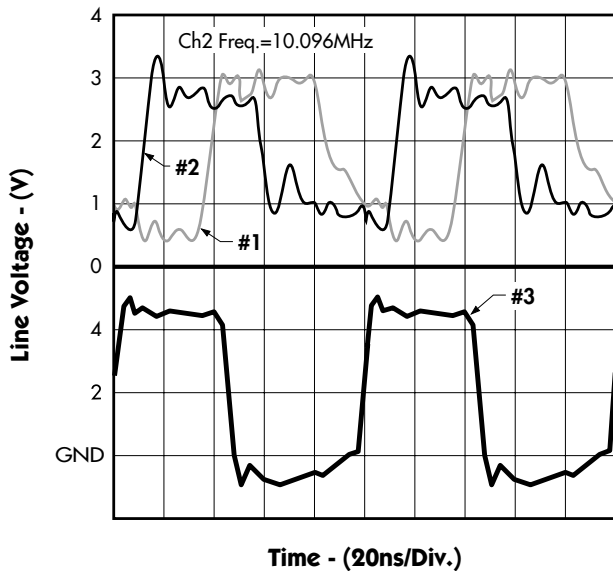


FIGURE 4. — 20MHz WAVEFORM

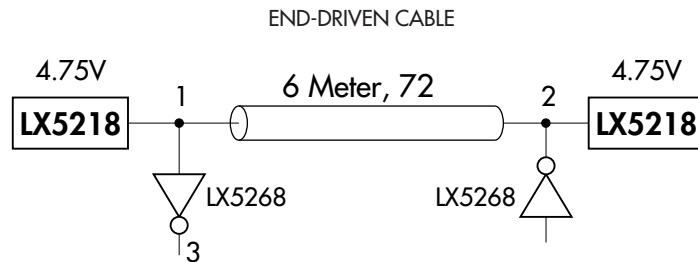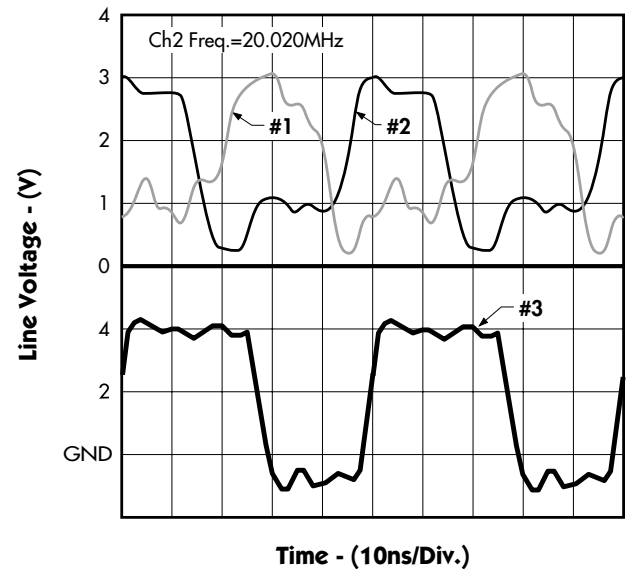

9-CHANNEL PLUG AND PLAY SCSI TERMINATOR

PRODUCTION DATA SHEET

CHARACTERISTIC CURVES

FIGURE 5. — OUTPUT HIGH VOLTAGE vs. JUNCTION TEMP.

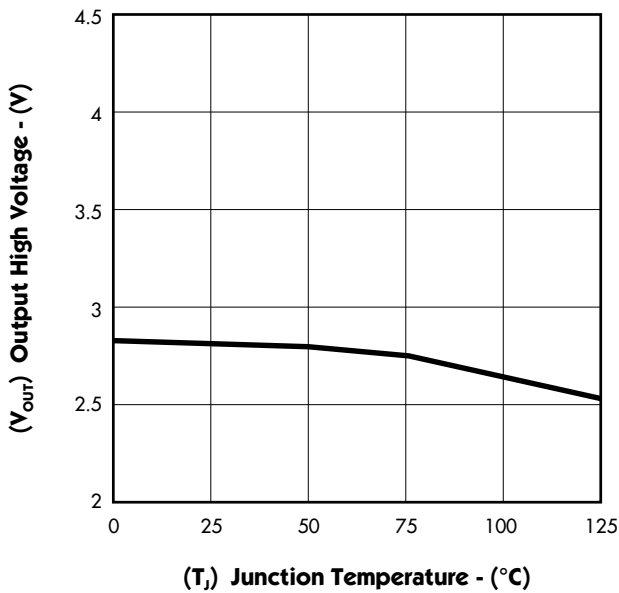


FIGURE 6. — OUTPUT CURRENT vs. JUNCTION TEMP.

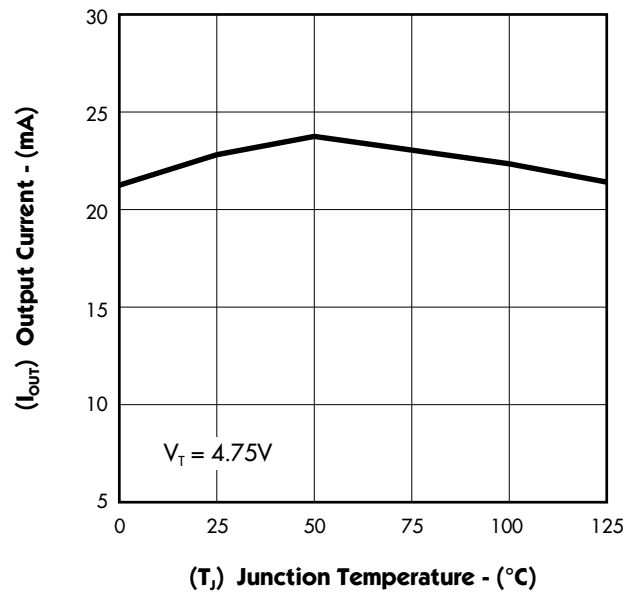


FIGURE 7. — OUTPUT CURRENT vs. OUTPUT HIGH VOLTAGE


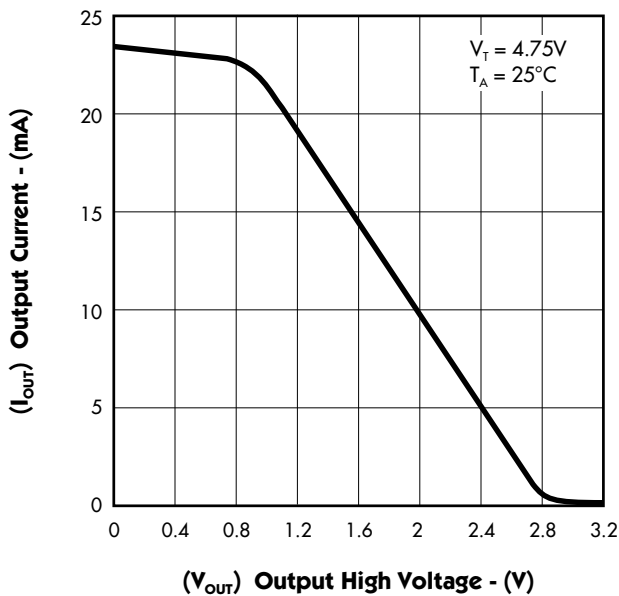


FIGURE 8. — OUTPUT CURRENT vs. OUTPUT HIGH VOLTAGE

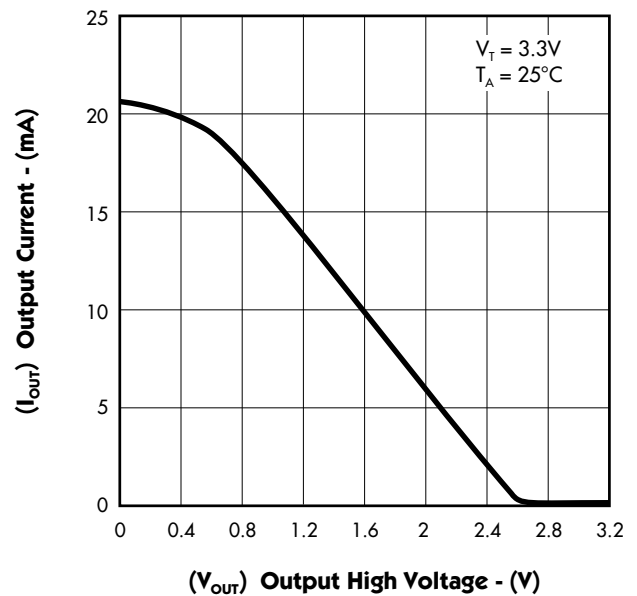

9-CHANNEL PLUG AND PLAY SCSI TERMINATOR

PRODUCTION DATA SHEET

CHARACTERISTIC CURVES

FIGURE 9. — TERMPWR SUPPLY CURRENT vs. TERMINATION VOLTAGE

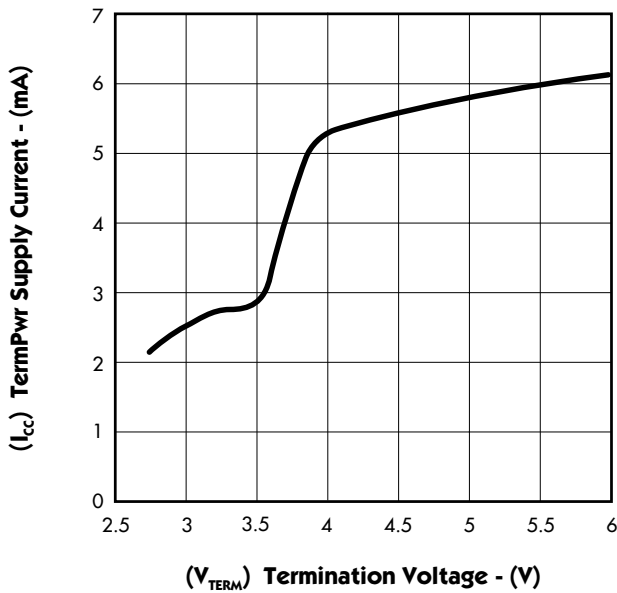


FIGURE 10. — LX5218 TERMPWR SUPPLY CURRENT vs. TERMINATION VOLTAGE (Disabled)

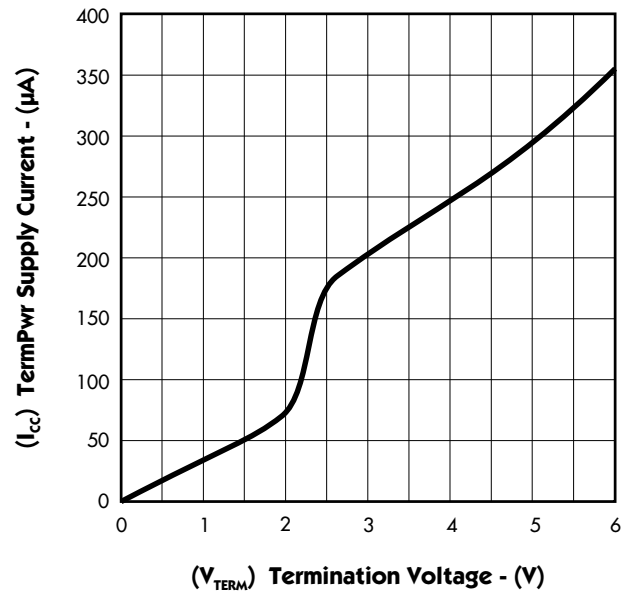


FIGURE 11. — OUTPUT HIGH VOLTAGE vs. JUNCTION TEMP.


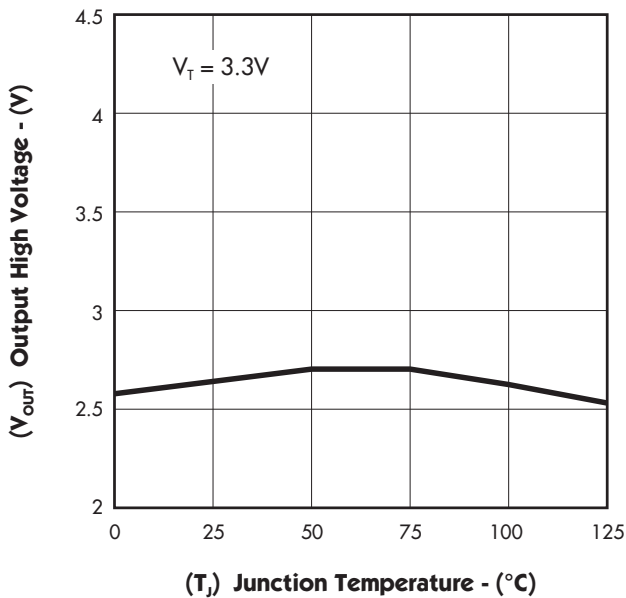


FIGURE 12. — OUTPUT CURRENT vs. JUNCTION TEMP.

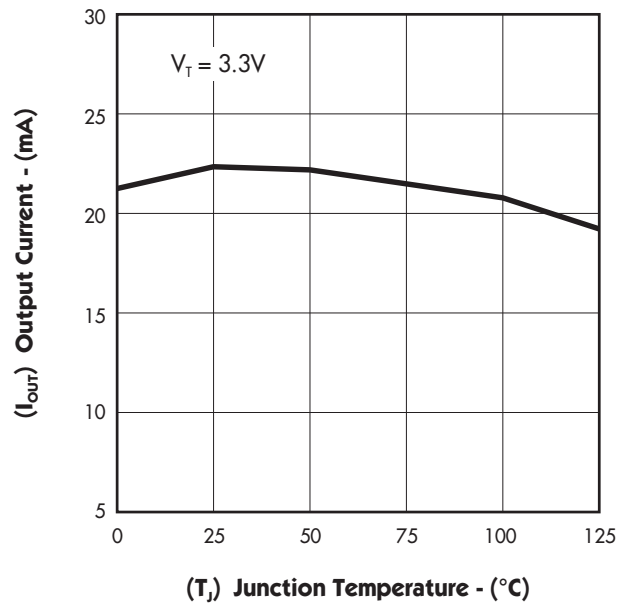

9-CHANNEL PLUG AND PLAY SCSI TERMINATOR

PRODUCTION DATA SHEET

CHARACTERISTIC CURVES

FIGURE 13. — OUTPUT HIGH VOLTAGE vs. TERMINATION VOLTAGE


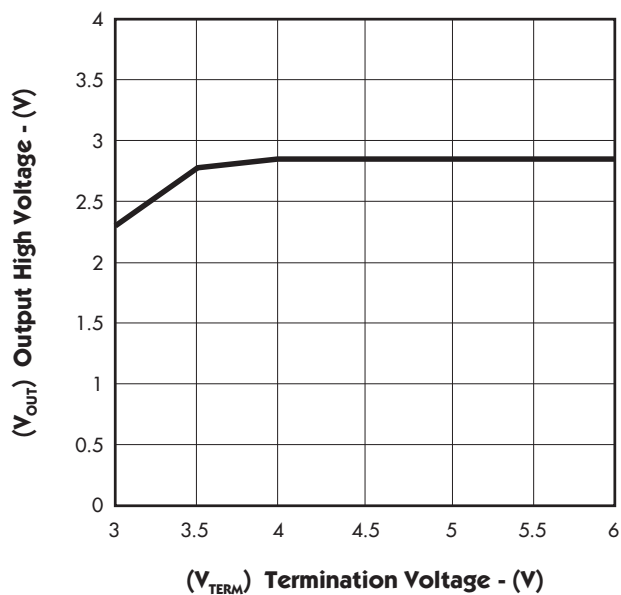


FIGURE 14. — OUTPUT CURRENT vs. TERMINATION VOLTAGE

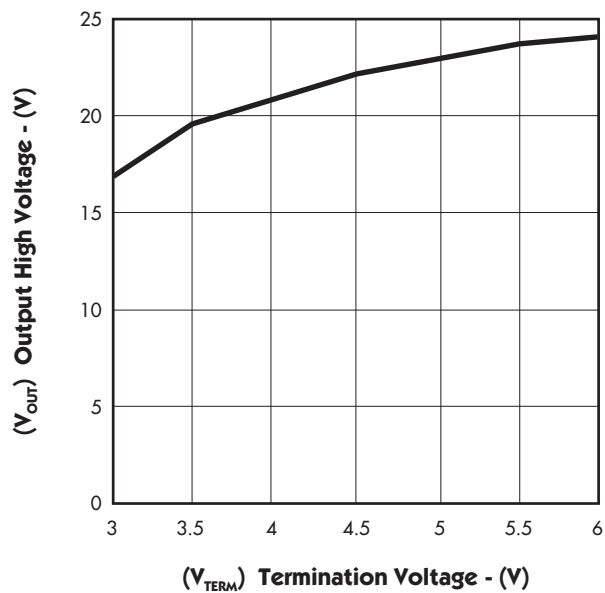


9-CHANNEL PLUG AND PLAY SCSI TERMINATOR

PRODUCTION DATA SHEET


CHARACTERISTIC CURVES

FIGURE 15. — OUTPUT CURRENT CHANNEL TO CHANNEL MATCHING

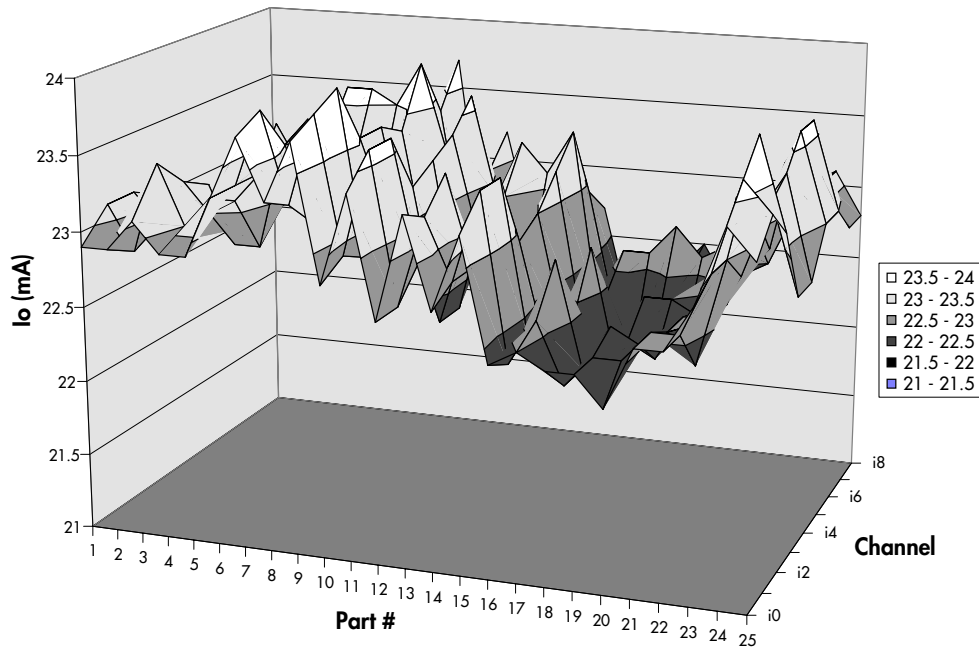

APPLICATION SCHEMATIC

FIGURE 16 — 8-BIT SCSI SYSTEM APPLICATION

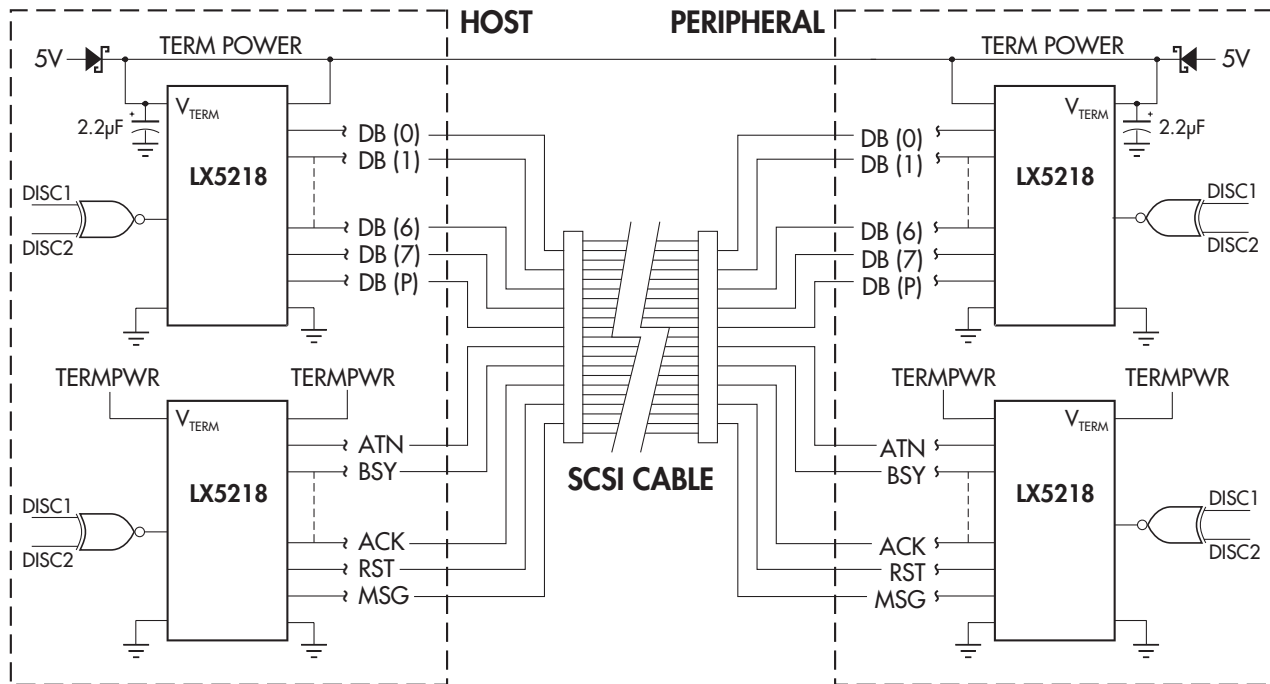

Note: Add third LX5218 for 16-bit SCSI

™ UltraMAX is a trademark of Linfinitly Microelectronics Inc.

PRODUCTION DATA - Information contained in this document is proprietary to Linfinitly, and is current as of publication date. This document may not be modified in any way without the express written consent of Linfinitly. Product processing does not necessarily include testing of all parameters. Linfinitly reserves the right to change the configuration and performance of the product and to discontinue product at any time.