

VRMS	$I_D = 20 \text{ A } (T_c = 73 \text{ °C})$	C_{max}	R _{min}
V	Types	μF	Ω
	SKD 25/02		0,15
	SKD 25/04		0,3
	SKD 25/08		0,7
	SKD 25/12		1
	SKD 25/14		1,2
	SKD 25/16		1,5
	V	SKD 25/02 SKD 25/04 SKD 25/08 SKD 25/12 SKD 25/14	SKD 25/02 SKD 25/04 SKD 25/08 SKD 25/12 SKD 25/14

Power Bridge Rectifiers

SKD 25


Features


- Square plastic case with isolated metal base plate and fast-on connectors
- Blocking voltage to 1600 V
- High surge current
- · Easy chassis mounting
- UL recognized, file no. E 63 532


Typical Applications


- Three phase rectifier for power supplies
- Input rectifiers for variable frequency drives
- Rectifier for DC motor field supplies
- · Battery charger rectifiers
- Recommended snubber network: RC: 50 Ω , 0.1 μ F (P $_{R}$ = 1 W)
- Freely suspended or mounted on an insulator
- 2) Mounted on a painted metal sheet of min. 250 x 250 x 1 mm


Symbol	Conditions	Values	Units
I_D	T _a = 45 °C, isolated ¹⁾	3,5	Α
	T _a = 45 °C, chassis ²⁾	12	Α
I _{DCL}	T _a = 45 °C, isolated ¹⁾	3,5	Α
	T _a = 45 °C, chassis ²⁾	12	Α
I _{FSM}	T _{vi} = 25 °C, 10 ms	370	Α
	T _{vi} = 150 °C, 10 ms	320	Α
i²t	T _{vi} = 25 °C, 8,3 10 ms	680	A²s
	T _{vj} = 150 °C, 8,3 10 ms	500	A²s
V _F	T _{vi} = 25°C, I _F = 150 A	max. 2,2	V
V _(TO)	T _{vi} = 150°C	0,85	V
r _T	$T_{vi} = 150^{\circ}C$	12	mΩ
I_{RD}	$T_{vj}^{S} = 25^{\circ}C, V_{RD} = V_{RRM}$	300	μA
I_{RD}	$T_{vj} = 150$ °C, $V_{RD} = V_{RRM}$	5	mA
t _{rr}	$T_{vj} = 25^{\circ}C$	10	μs
f_G		2000	Hz
R _{th(j-a)}	isolated ¹⁾	15	K/W
() =/	chassis ²⁾	4,7	K/W
$R_{th(j-c)}$	total	1,75	K/W
R _{th(c-s)}	total	0,15	K/W
$T_{v_{j}}$		- 40 + 150	°C
T _{stg}		- 55 + 150	°C
V _{isol}	a. c. 50 60 Hz; r.m.s.; 1 s / 1 min.	3000 / 2500	V~
M _s	to heatsink	2 ± 15 %	Nm
M _t			Nm
m		26	g
Fu		20	А
Case		G 11a	




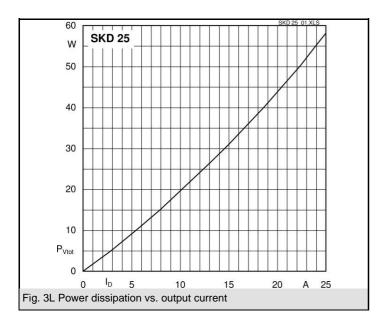

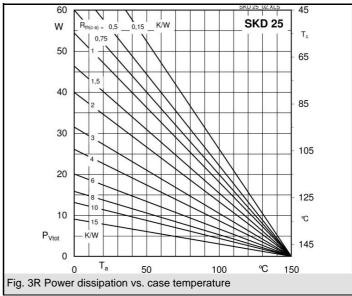

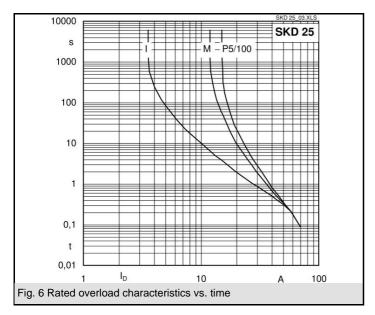

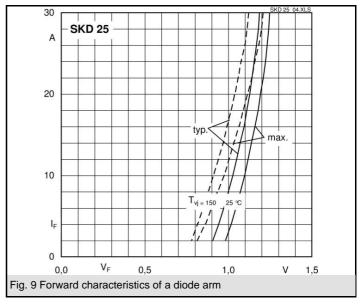

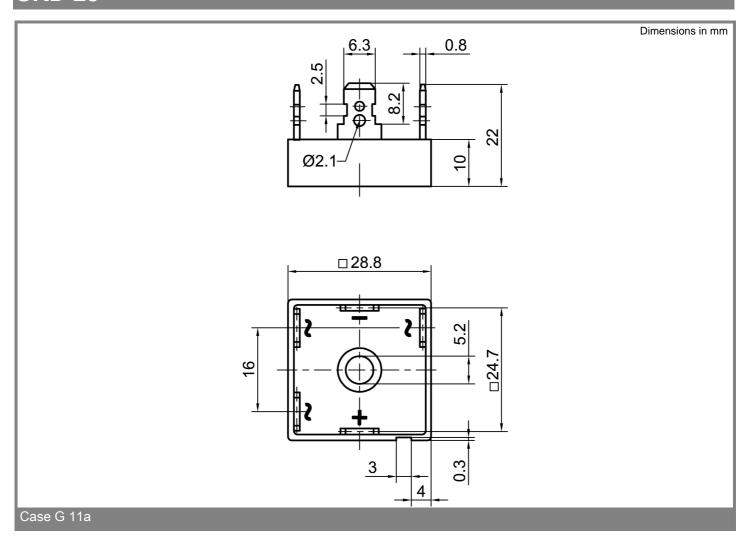

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.