


PLL FM STEREO MULTIPLEX (3V USE)

The TA7370P/F are PLL FM stereo multiplex ICs designed for portable radio applications. It is especially suitable for small-sized low-voltage sets because of flat package and low current.

- . Small Installed Area and Few External Parts
- . Excellent Pilot Lamp Sensitivity
: $V_{L(ON)}=9mV_{rms}(Typ.)$
- . Operating Supply Voltage Range : $V_{CC(opr)}=1.6\sim 5V$
- . Suitable for LED Driving : $I_{LAMP}=8mA(Max.)$
- . VCO Stop Capability (The VCO is stopped when the L.P.F.2 terminal is connected to the power supply line, and then the stereo indicator is turned off.)
- . Easy Adjustment (The monitored free running frequency of VCO is 38kHz at Stereo Lamp terminal.)

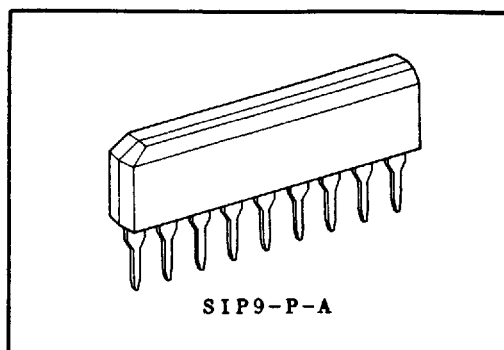

Weight: 0.92g(Typ.)

MAXIMUM RATINGS (Ta=25°C)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Supply Voltage		VCC	6	V
Lamp Voltage		VLAMP	8	V
Lamp Current		ILAMP	8	mA
Power Dissipation (Note)	TA7370P	PD	500	mW
Operating Temperature		Topr	-25~75	°C
Storage Temperature		Tstg	-55~150	°C

Note: Derated above Ta=25°C in the proportion of 4mW/°C for TA7370P.

The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of TOSHIBA or others.


GT1A12(D)

TA7370P-1

1991-9-18

TOSHIBA CORPORATION

BLOCK DIAGRAM

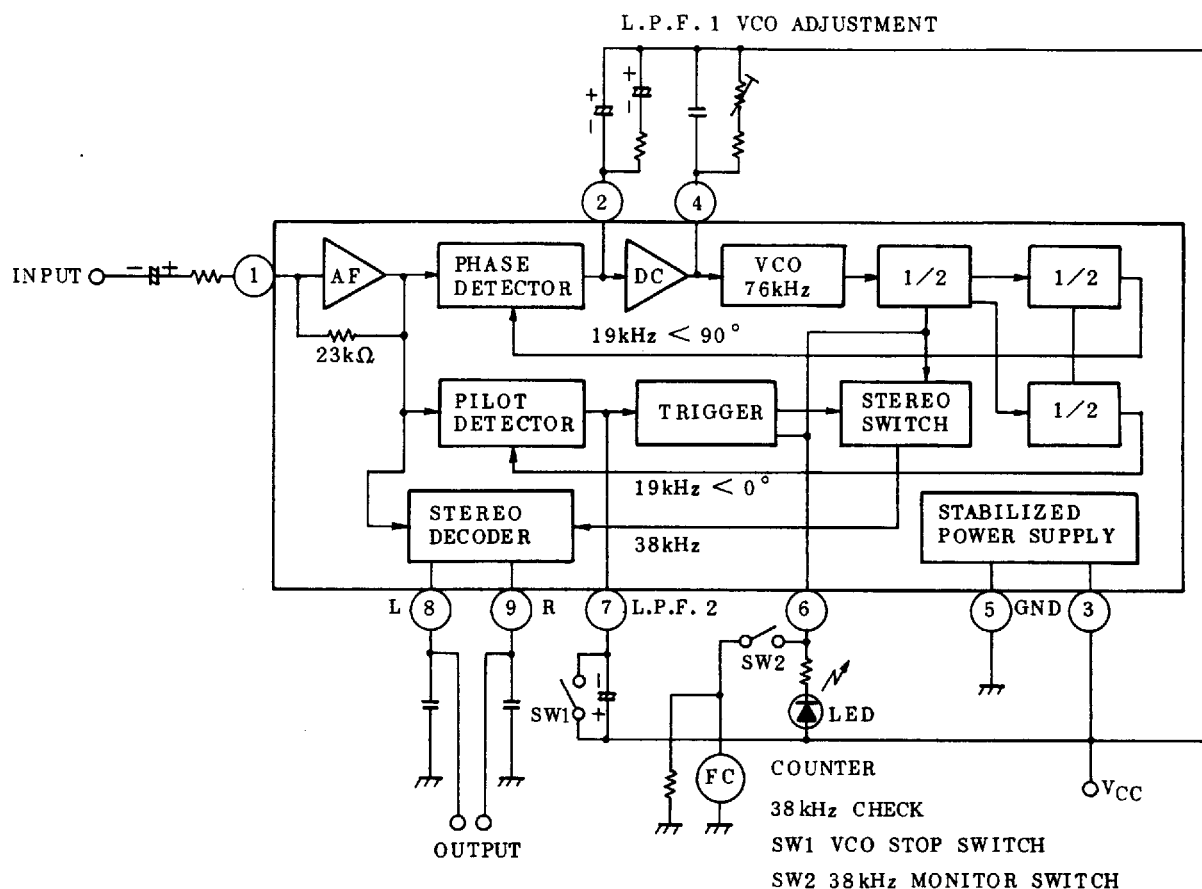

ELECTRICAL CHARACTERISTICS

1. DC CHARACTERISTICS (Ta=25°C, VCC=3V, Terminal Voltage at No Signal)

TERMINAL	CHARACTERISTIC	SYMBOL	TYP.	UNIT
1	INPUT	V1	0.2	V
2	L.P.F.1	V2	2.6	V
3	VCC	V3	3.0	V
4	VCO	V4	2.8	V
5	GND	V5	0	V
6	ST. LAMP	V6	-	V
7	L.P.F.2	V7	2.6	V
8	L-CH OUTPUT	V8	1.0	V
9	R-CH OUTPUT	V9	1.0	V

TA7370P-2
1991-9-18
TOSHIBA CORPORATION

2. AC CHARACTERISTICS (Unless otherwise specified, $T_a=25^\circ\text{C}$, $V_{CC}=3\text{V}$, $f=1\text{kHz}$)

CHARACTERISTIC		SYMBOL	TEST CIRCUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
Supply Current		I_{CC}	-	at Lamp off	-	1.6	3.0	mA	
Input Resistance		R_{IN}	-		-	23	-	k Ω	
Output Resistance		R_{OUT}	-		-	6.8	-	k Ω	
Max. Composite Signal Input Voltage		$V_{IN}(\text{MAX})$ STEREO	-	L+R 90%, P=10% $f_m=1\text{kHz}$, THD=5%	-	300	-	mV _{rms}	
Separation		Sep.	-	L+R=135mV _{rms} P=15mV _{rms}	$f_m=100\text{Hz}$	-	33	-	dB
					$f_m=1\text{kHz}$	25	33	-	
					$f_m=10\text{kHz}$	-	33	-	
Total Harmonic Distortion	MONAURAL	THD (MONAURAL)	-	$V_{IN}=150\text{mV}_{rms}$	-	0.1	1.0	%	
	STEREO	THD (STEREO)	-	L+R=135mV _{rms} P=15mV _{rms} , $f_m=1\text{kHz}$	-	0.1	-		
Voltage Gain		G_v	-	$V_{IN}=150\text{mV}_{rms}$	-1.5	0	1.5	dB	
Channel Balance		C.B.	-	$V_{IN}=150\text{mV}_{rms}$	-	0	1.5	dB	
Lamp ON Sensitivity		$V_L(\text{ON})$	-	Pilot Input	-	9	15	mV _{rms}	
Lamp OFF Sensitivity		$V_L(\text{OFF})$	-		2	6	-		
Stereo Lamp Hysteresis		V_H	-	To turn Off from turn On	-	3	-	mV _{rms}	
Capture Range		C.R.	-	P=15mV _{rms}	-	± 3	-	%	
Carrier Leak (Note)	19kHz	C.L.	-	P=15mV _{rms} L+R=135mV _{rms}	-	30	-	dB	
	38kHz				-	50	-		
SCA Rejection Ratio		SCA Rej.	-	P=15mV _{rms} , L+R=120mV _{rms} SCA=15mV _{rms} , $f_{SCA}=67\text{kHz}$	-	70	-	dB	
Signal to Noise Ratio		S/N	-	$V_{IN}=150\text{mV}_{rms}$, $R_g=620\Omega$	-	78	-	dB	


Note: Carrier Leak of 38kHz is only carrier.





TA7370P-3

1991-9-18

TOSHIBA CORPORATION

TEST CIRCUIT





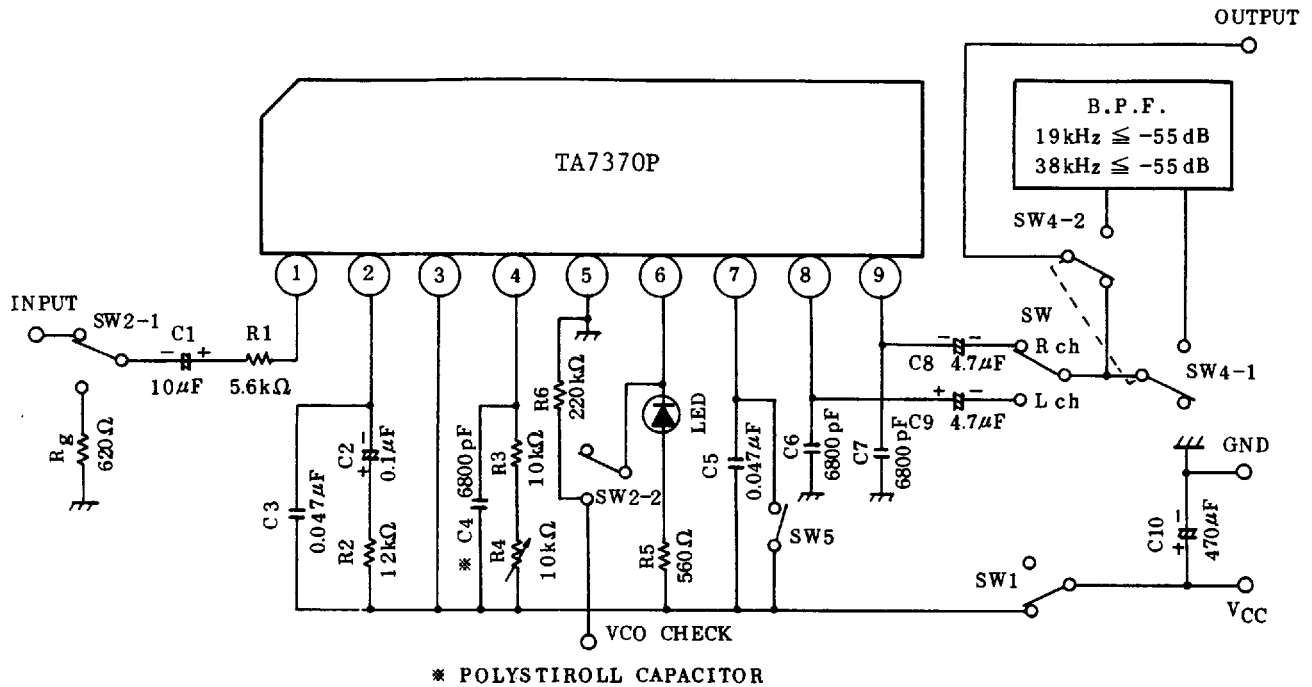


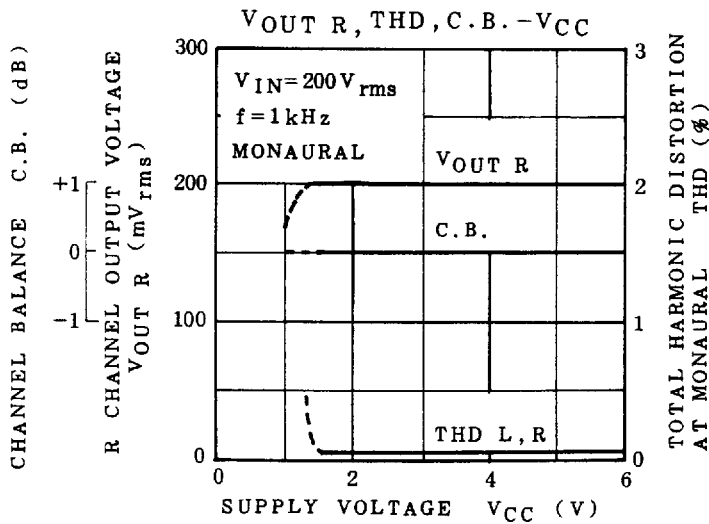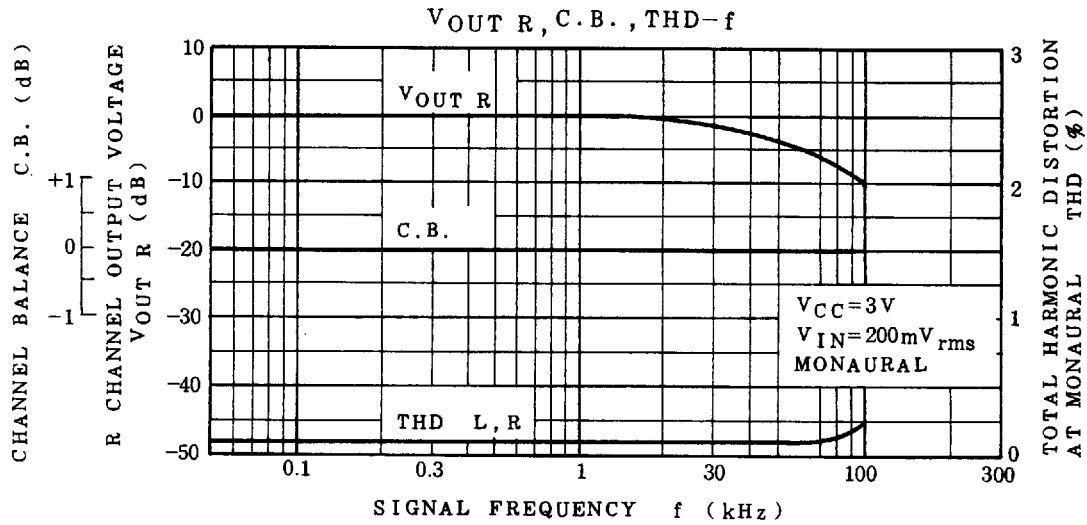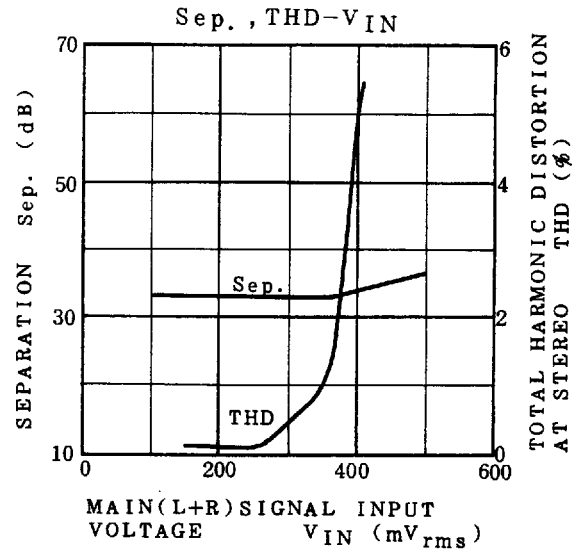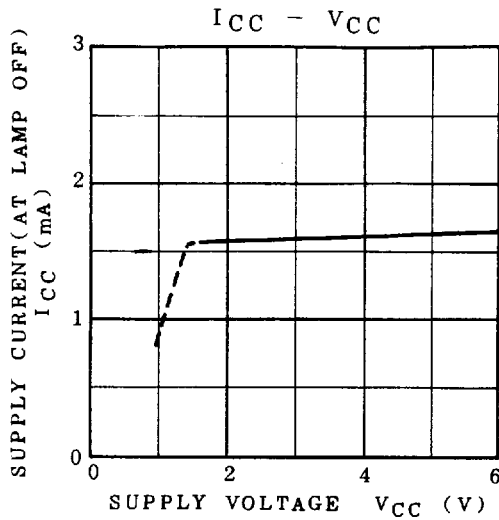

TA7370P-5

1991-9-18






TOSHIBA CORPORATION

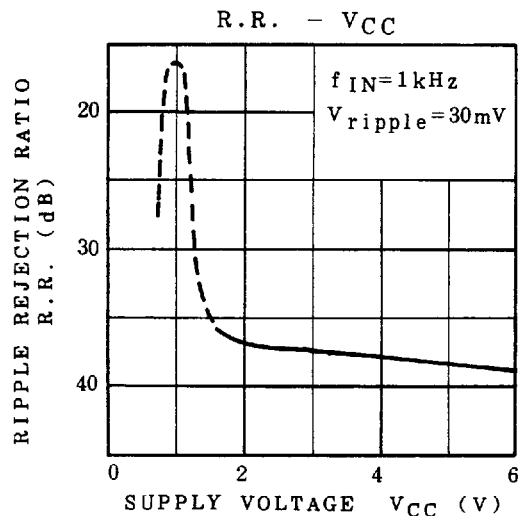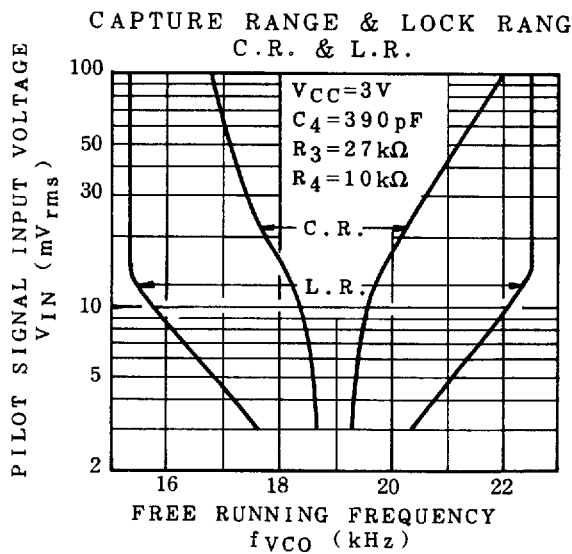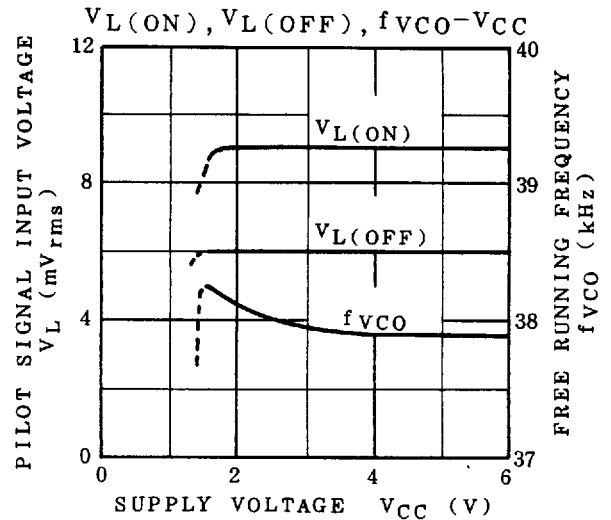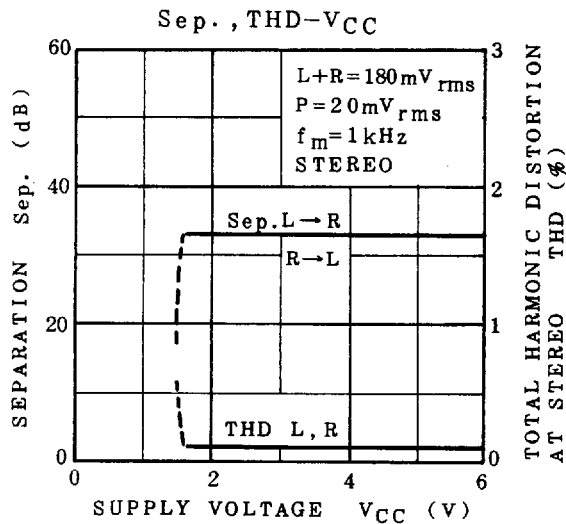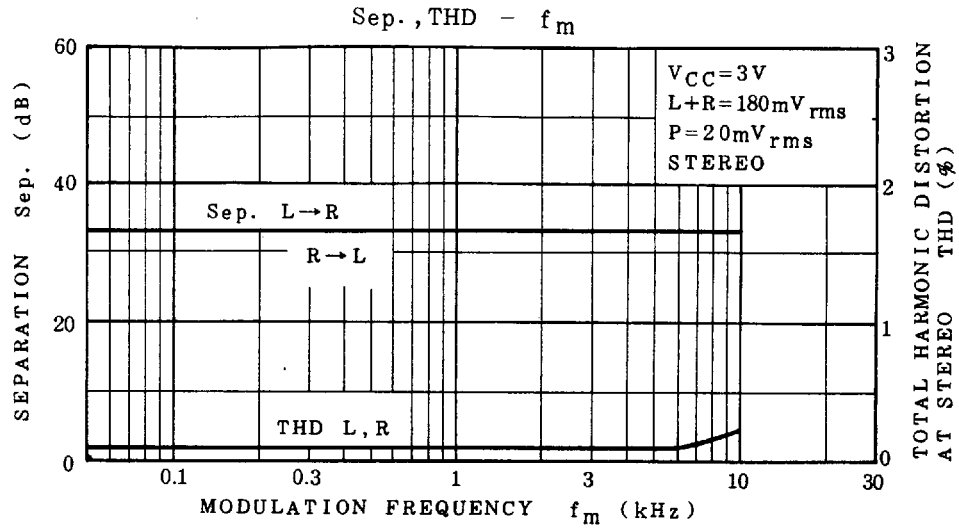

TA7370P-6

1991-9-18

TOSHIBA CORPORATION

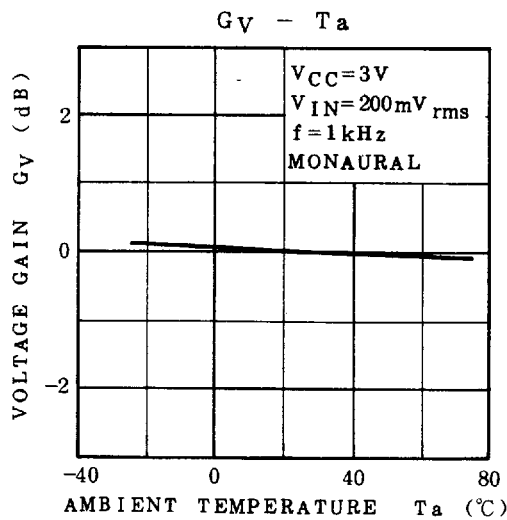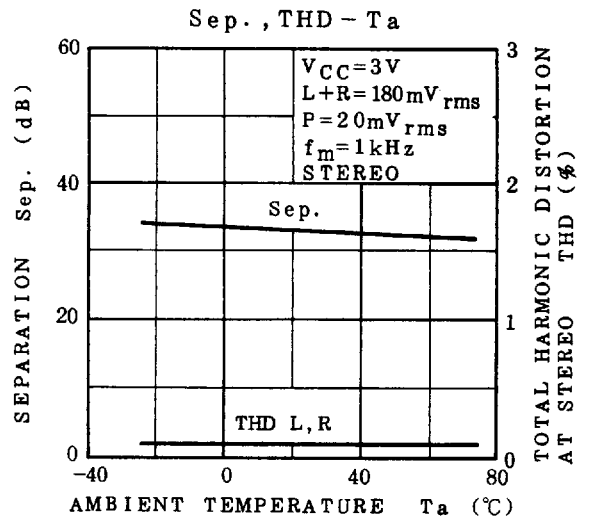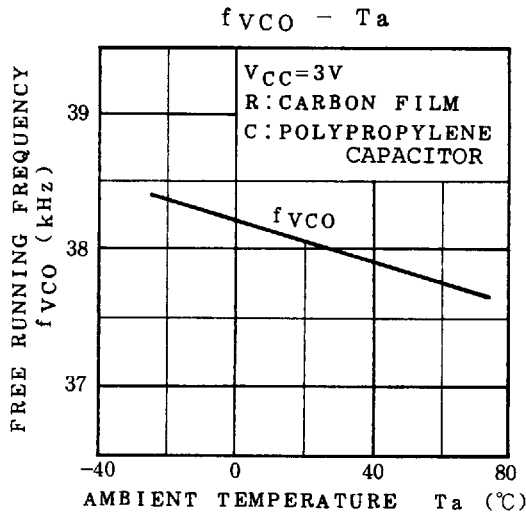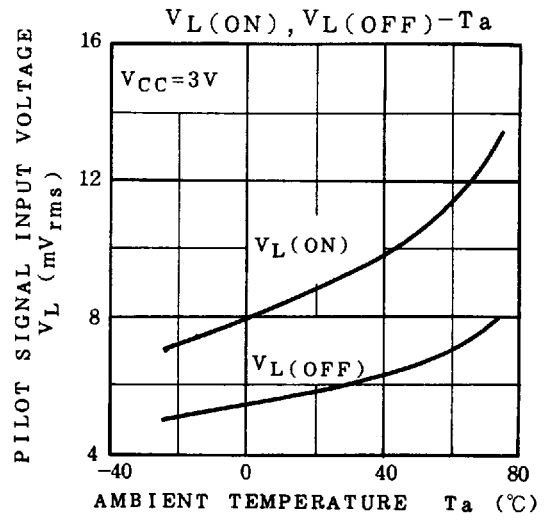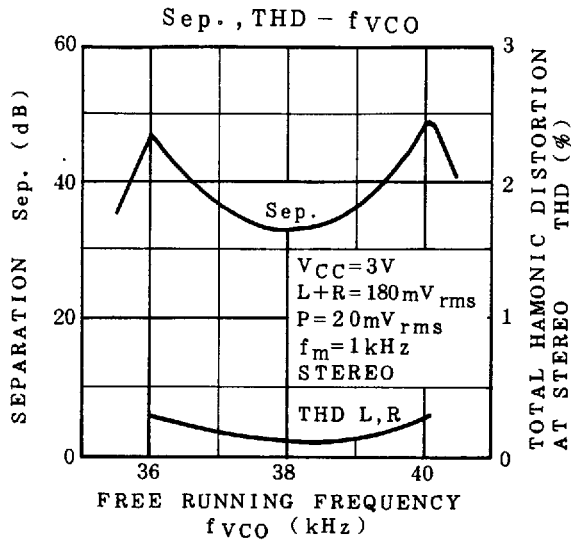


TA7370P-7

1991-9-18

TOSHIBA CORPORATION

OUTLINE DRAWING
SIP9-P-A

Unit in mm

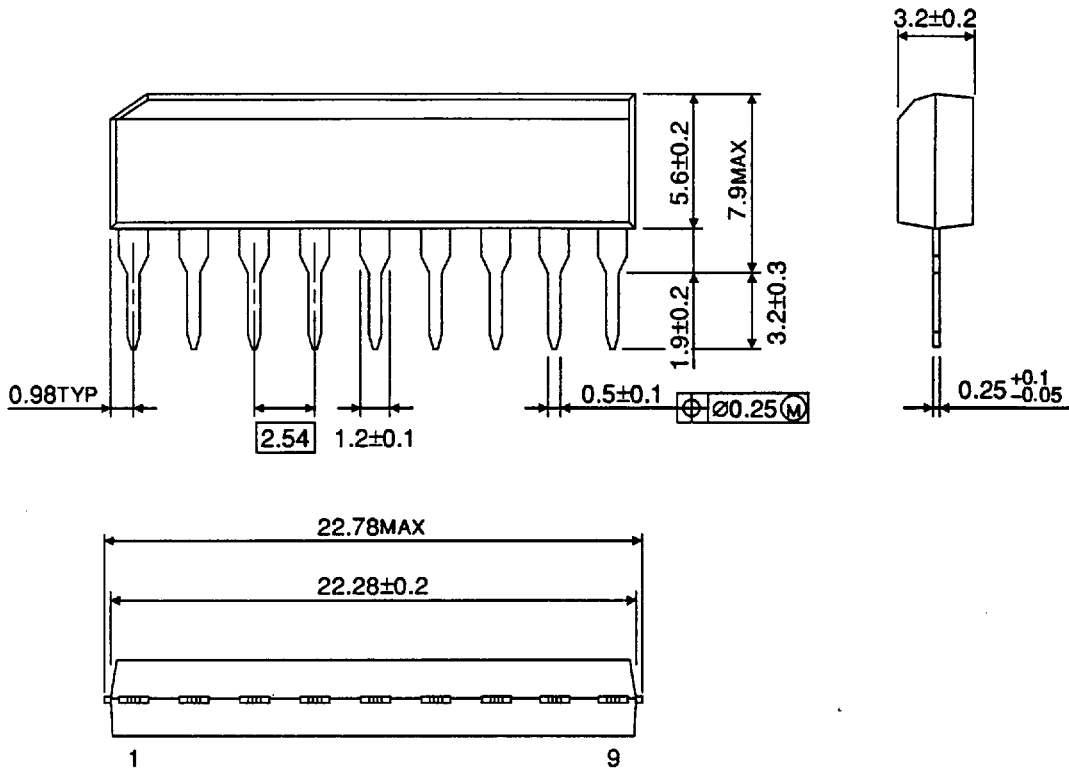

Weight : 0.92g (Typ.)

TA7370P 8 *
1991-9-18
TOSHIBA CORPORATION