

### 6A, 200V Ultrafast Diodes

The RURD620, and RURD620S are ultrafast diodes with soft recovery characteristics ( $t_{rr} < 25\text{ns}$ ). They have low forward voltage drop and are silicon nitride passivated ion-implanted epitaxial planar construction.

These devices are intended for use as freewheeling/clamping diodes and rectifiers in a variety of switching power supplies and other power switching applications. Their low stored charge and ultrafast soft recovery minimize ringing and electrical noise in many power switching circuits, reducing power loss in the switching transistors.

Formerly developmental type TA49037.

### Ordering Information

PART NUMBER	PACKAGE	BRAND
RURD620	TO-251	RUR620
RURD620S	TO-252	RUR620

NOTE: When ordering, use the entire part number. Add the suffix, 9A, to obtain the TO-252 variant in tape and reel, i.e., RURD620S9A.

### Symbol



### Features


- Ultrafast with Soft Recovery . . . . . <25ns
- Operating Temperature . . . . . 175°C
- Reverse Voltage . . . . . 200V
- Avalanche Energy Rated
- Planar Construction

### Applications


- Switching Power Supplies
- Power Switching Circuits
- General Purpose

### Packaging

JEDEC STYLE TO-251

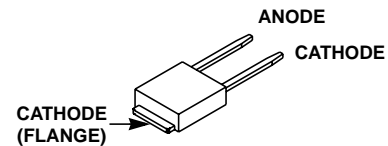

JEDEC STYLE TO-252



### Absolute Maximum Ratings $T_C = 25^\circ\text{C}$ Unless Otherwise Specified

	RURD620	RURD620S	UNITS
Peak Repetitive Reverse Voltage . . . . . $V_{RRM}$	200		V
Working Peak Reverse Voltage . . . . . $V_{RWM}$	200		V
DC Blocking Voltage . . . . . $V_R$	200		V
Average Rectified Forward Current . . . . . $I_{F(AV)}$ $T_C = 160^\circ\text{C}$	6		A
Repetitive Peak Surge Current . . . . . $I_{FRM}$ Square Wave, 20kHz	12		A
Nonrepetitive Peak Surge Current . . . . . $I_{FSM}$ Halfwave, 1 phase, 60Hz	60		A
Maximum Power Dissipation . . . . . $P_D$	45		W
Avalanche Energy (See Figures 10 and 11) . . . . . $E_{AVL}$	10		mJ
Operating and Storage Temperature . . . . . $T_{STG}, T_J$	-65 to 175		°C
Maximum Lead Temperature for Soldering			
Leads at 0.063in (1.6mm) from Case for 10s . . . . . $T_L$	300		300°C
Package Body for 10s, See Tech Brief 334 . . . . . $T_{PKG}$	260		260°C

# RURD620, RURD620S

## Electrical Specifications $T_C = 25^\circ\text{C}$ , Unless Otherwise Specified

SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNITS
$V_F$	$I_F = 6\text{A}$	-	-	1.0	V
	$I_F = 6\text{A}, T_C = 150^\circ\text{C}$	-	-	0.83	V
$I_R$	$V_R = 200\text{V}$	-	-	100	$\mu\text{A}$
	$V_R = 200\text{V}, T_C = 150^\circ\text{C}$	-	-	500	$\mu\text{A}$
$t_{rr}$	$I_F = 1\text{A}, dI_F/dt = 200\text{A}/\mu\text{s}$	-	-	25	ns
	$I_F = 6\text{A}, dI_F/dt = 200\text{A}/\mu\text{s}$	-	-	30	ns
$t_a$	$I_F = 6\text{A}, dI_F/dt = 200\text{A}/\mu\text{s}$	-	13	-	ns
$t_b$	$I_F = 6\text{A}, dI_F/dt = 200\text{A}/\mu\text{s}$	-	6.5	-	ns
$Q_{RR}$	$I_F = 6\text{A}, dI_F/dt = 200\text{A}/\mu\text{s}$	-	20	-	nC
$C_J$	$V_R = 10\text{V}, I_F = 0\text{A}$	-	30	-	pF
$R_{\theta JC}$		-	-	3.5	$^\circ\text{C}/\text{W}$

### DEFINITIONS

$V_F$  = Instantaneous forward voltage ( $pw = 300\mu\text{s}$ ,  $D = 2\%$ ).

$I_R$  = Instantaneous reverse current.

$t_{rr}$  = Reverse recovery time (See Figure 9), summation of  $t_a + t_b$ .

$t_a$  = Time to reach peak reverse current (See Figure 9).

$t_b$  = Time from peak  $I_{RM}$  to projected zero crossing of  $I_{RM}$  based on a straight line from peak  $I_{RM}$  through 25% of  $I_{RM}$  (See Figure 9).

$Q_{RR}$  = Reverse recovery charge.

$C_J$  = Junction Capacitance.

$R_{\theta JC}$  = Thermal resistance junction to case.

$pw$  = Pulse width.

$D$  = Duty cycle.

## Typical Performance Curves

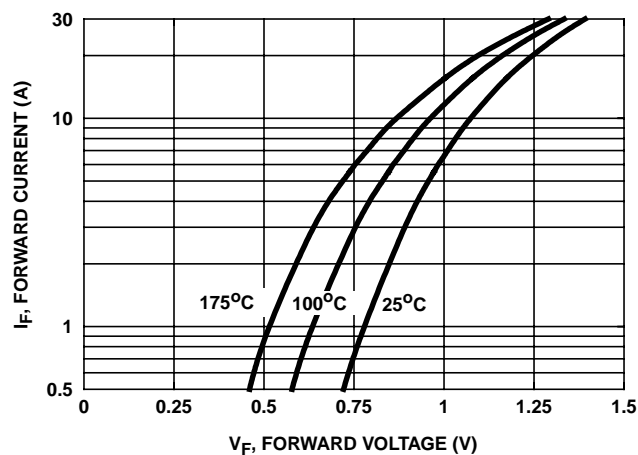


FIGURE 1. FORWARD CURRENT vs FORWARD VOLTAGE

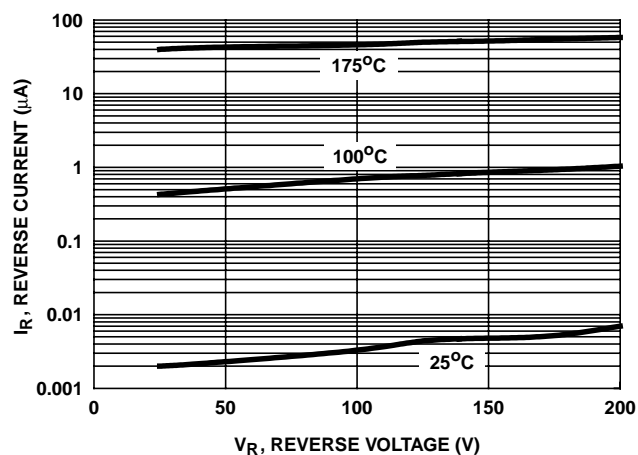


FIGURE 2. REVERSE CURRENT vs REVERSE VOLTAGE

Typical Performance Curves (Continued)

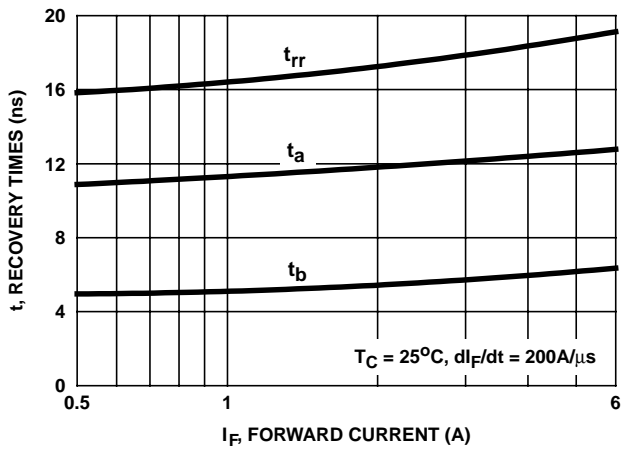


FIGURE 3.  $t_{rr}$ ,  $t_a$  AND  $t_b$  CURVES vs FORWARD CURRENT

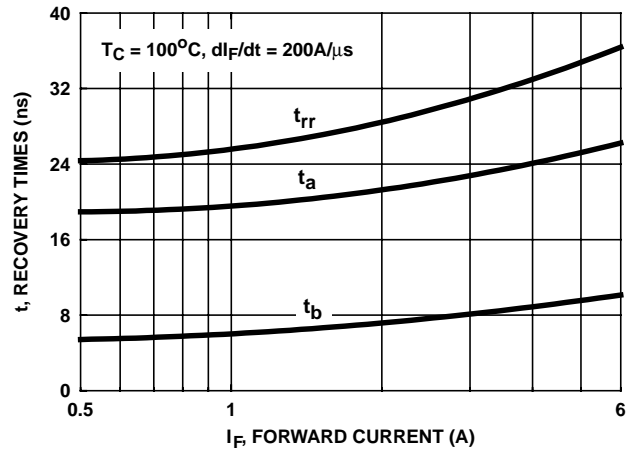


FIGURE 4.  $t_{rr}$ ,  $t_a$  AND  $t_b$  CURVES vs FORWARD CURRENT

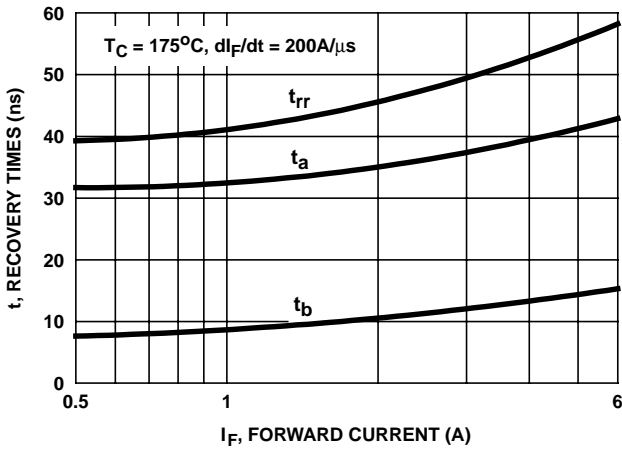


FIGURE 5.  $t_{rr}$ ,  $t_a$  AND  $t_b$  CURVES vs FORWARD CURRENT

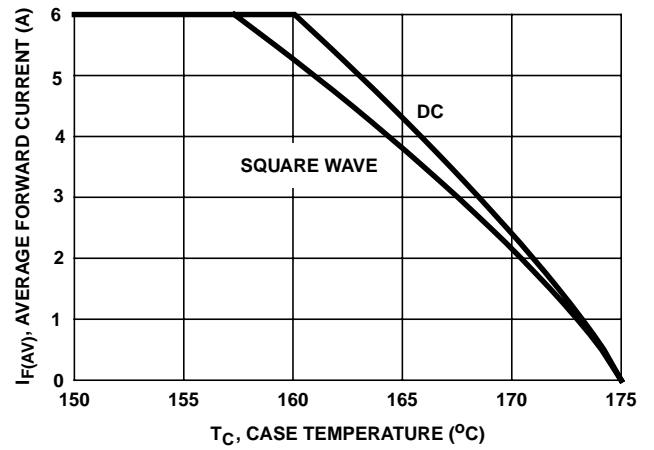


FIGURE 6. CURRENT DERATING CURVE

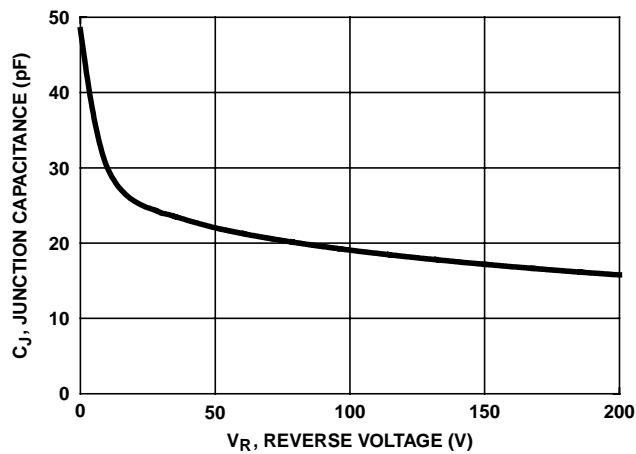


FIGURE 7. JUNCTION CAPACITANCE vs REVERSE VOLTAGE

Test Circuits and Waveforms

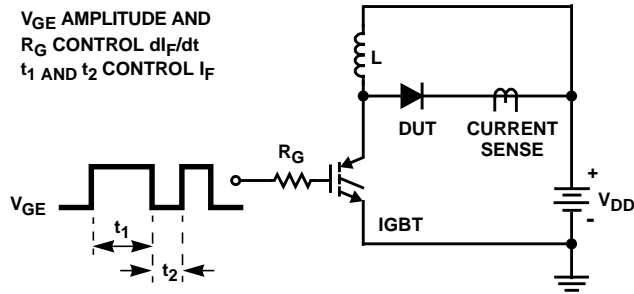


FIGURE 8.  $t_{rr}$  TEST CIRCUIT

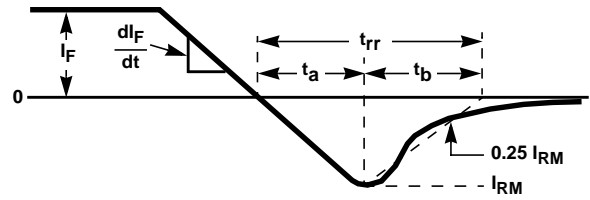


FIGURE 9.  $t_{rr}$  WAVEFORMS AND DEFINITIONS

$I = 1A$   
 $L = 20mH$   
 $R < 0.1\Omega$   
 $E_{AVL} = 1/2LI^2 [V_{R(AVL)}/(V_{R(AVL)} - V_{DD})]$   
 $Q_1 = IGBT (BV_{CES} > DUT V_{R(AVL)})$

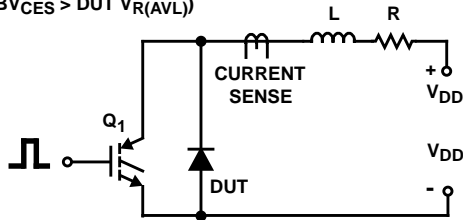


FIGURE 10. AVALANCHE ENERGY TEST CIRCUIT

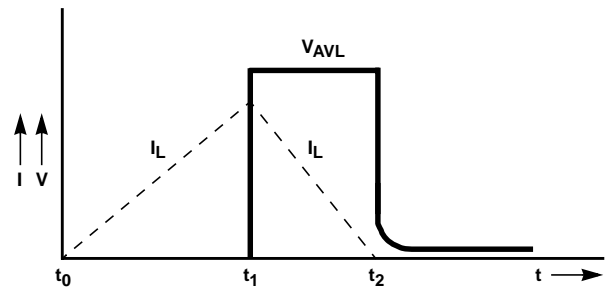


FIGURE 11. AVALANCHE CURRENT AND VOLTAGE WAVEFORMS

All Intersil semiconductor products are manufactured, assembled and tested under **ISO9000** quality systems certification.

*Intersil semiconductor products are sold by description only. Intersil Corporation reserves the right to make changes in circuit design and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.*

For information regarding Intersil Corporation and its products, see web site [www.intersil.com](http://www.intersil.com)