

# Advanced Power MOSFET

# SSP1N50A

## FEATURES

- Avalanche Rugged Technology
- Rugged Gate Oxide Technology
- Lower Input Capacitance
- Improved Gate Charge
- Extended Safe Operating Area
- Lower Leakage Current : 10  $\mu$ A (Max.) @  $V_{DS} = 500V$
- Lower  $R_{DS(ON)}$  : 4.046  $\Omega$  (Typ.)

$$BV_{DSS} = 500 V$$

$$R_{DS(on)} = 5.5 \Omega$$

$$I_D = 1.5 A$$

TO-220



1. Gate 2. Drain 3. Source

## Absolute Maximum Ratings

Symbol	Characteristic	Value	Units
$V_{DSS}$	Drain-to-Source Voltage	500	V
$I_D$	Continuous Drain Current ( $T_c=25^\circ C$ )	1.5	A
	Continuous Drain Current ( $T_c=100^\circ C$ )	0.97	
$I_{DM}$	Drain Current-Pulsed ①	5	A
$V_{GS}$	Gate-to-Source Voltage	$\pm 0$	V
$E_{AS}$	Single Pulsed Avalanche Energy ②	113	mJ
$I_{AR}$	Avalanche Current ①	1.5	A
$E_{AR}$	Repetitive Avalanche Energy ①	3.6	mJ
dv/dt	Peak Diode Recovery dv/dt ③	3.5	V/ns
$P_D$	Total Power Dissipation ( $T_c=25^\circ C$ )	36	W
	Linear Derating Factor	0.29	
$T_J, T_{STG}$	Operating Junction and Storage Temperature Range	-55 to +150	$^\circ C$
$T_L$	Maximum Lead Temp. for Soldering Purposes, 1/8" from case for 5-seconds	300	

## Thermal Resistance

Symbol	Characteristic	Typ.	Max.	Units
$R_{\theta JC}$	Junction-to-Case	--	3.44	$^\circ C/W$
$R_{\theta CS}$	Case-to-Sink	0.5	--	
$R_{\theta JA}$	Junction-to-Ambient	--	62.5	



# SSP1N50A

## N-CHANNEL POWER MOSFET

### Electrical Characteristics ( $T_C=25^\circ\text{C}$ unless otherwise specified)

Symbol	Characteristic	Min.	Typ.	Max.	Units	Test Condition
$BV_{DSS}$	Drain-Source Breakdown Voltage	500	--	--	V	$V_{GS}=0V, I_D=250\mu A$
$\Delta BV/\Delta T_J$	Breakdown Voltage Temp. Coeff.	--	0.63	--	V/C	$I_D=250\mu A$ See Fig 7
$V_{GS(th)}$	Gate Threshold Voltage	2.0	--	4.0	V	$V_{DS}=5V, I_D=250\mu A$
$I_{GSS}$	Gate-Source Leakage, Forward	--	--	100	nA	$V_{GS}=30V$
	Gate-Source Leakage, Reverse	--	--	-100	nA	$V_{GS}=-30V$
$I_{DSS}$	Drain-to-Source Leakage Current	--	--	10	$\mu A$	$V_{DS}=500V$
		--	--	100		$V_{DS}=400V, T_C=125^\circ C$
$R_{DS(on)}$	Static Drain-Source On-State Resistance	--	--	5.5	$\Omega$	$V_{GS}=10V, I_D=0.75A$ ④
$g_{fs}$	Forward Transconductance	--	1.1	--	$\bar{U}$	$V_{DS}=50V, I_D=0.75A$ ④
$C_{iss}$	Input Capacitance	--	220	290	pF	$V_{GS}=0V, V_{DS}=25V, f=1MHz$ See Fig 5
$C_{oss}$	Output Capacitance	--	30	35		
$C_{rss}$	Reverse Transfer Capacitance	--	11	13		
$t_{d(on)}$	Turn-On Delay Time	--	12	35	ns	$V_{DD}=250V, I_D=1.5A,$ $R_G=24\Omega$ See Fig 13 ④⑤
$t_r$	Rise Time	--	13	35		
$t_{d(off)}$	Turn-Off Delay Time	--	42	90		
$t_f$	Fall Time	--	15	40		
$Q_g$	Total Gate Charge	--	11	16	nC	$V_{DS}=400V, V_{GS}=10V,$ $I_D=1.5A$ See Fig 6 & Fig 12 ④⑤
$Q_{gs}$	Gate-Source Charge	--	1.6	--		
$Q_{gd}$	Gate-Drain("Miller") Charge	--	5.5	--		

### Source-Drain Diode Ratings and Characteristics

Symbol	Characteristic	Min.	Typ.	Max.	Units	Test Condition
$I_S$	Continuous Source Current	--	--	1.5	A	Integral reverse pn-diode in the MOSFET
$I_{SM}$	Pulsed-Source Current ①	--	--	5		
$V_{SD}$	Diode Forward Voltage ④	--	--	1.15	V	$T_J=25^\circ C, I_S=1.5A, V_{GS}=0V$
$t_{rr}$	Reverse Recovery Time	--	162	--	ns	$T_J=25^\circ C, I_F=1.5A$
$Q_{rr}$	Reverse Recovery Charge	--	0.54	--	$\mu C$	$di_F/dt=100A/\mu s$ ④

#### Notes ;

- ① Repetitive Rating : Pulse Width Limited by Maximum Junction Temperature
- ②  $L=90mH, I_{AS}=1.5A, V_{DD}=50V, R_G=27\Omega,$  Starting  $T_J=25^\circ C$
- ③  $I_{SD} \leq 1.5A, di/dt \leq 7 \cdot A/\mu s, V_{DD} \leq BV_{DSS},$  Starting  $T_J=25^\circ C$
- ④ Pulse Test : Pulse Width =  $250\mu s,$  Duty Cycle  $\leq 2\%$
- ⑤ Essentially Independent of Operating Temperature

Fig 1. Output Characteristics

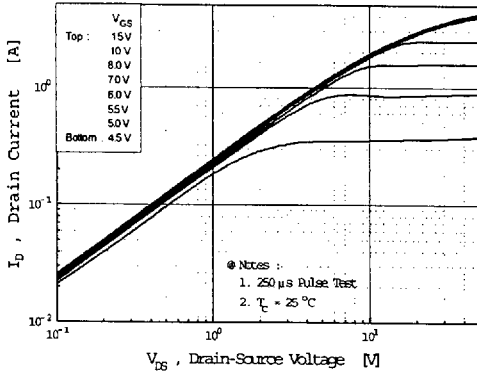


Fig 2. Transfer Characteristics

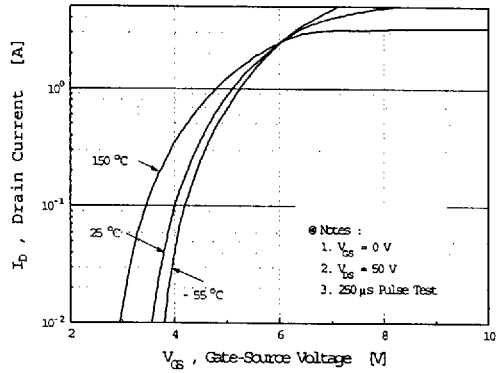


Fig 3. On-Resistance vs. Drain Current

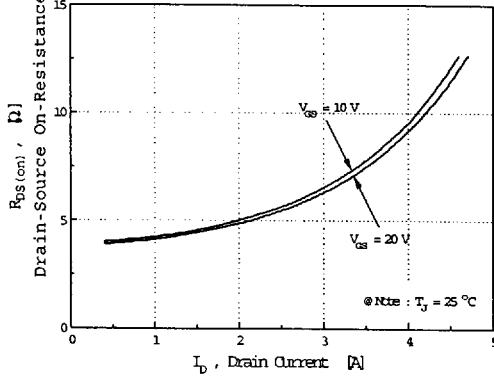


Fig 4. Source-Drain Diode Forward Voltage

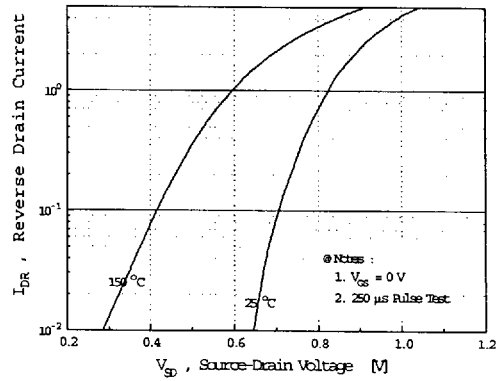


Fig 5. Capacitance vs. Drain-Source Voltage


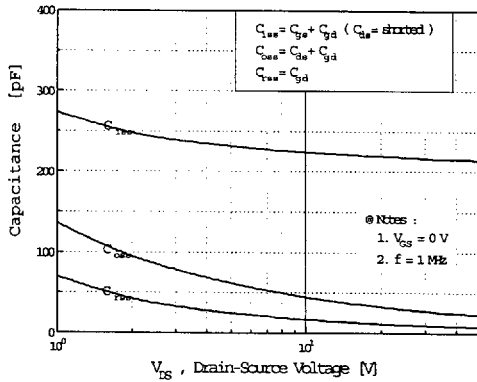


Fig 6. Gate Charge vs. Gate-Source Voltage

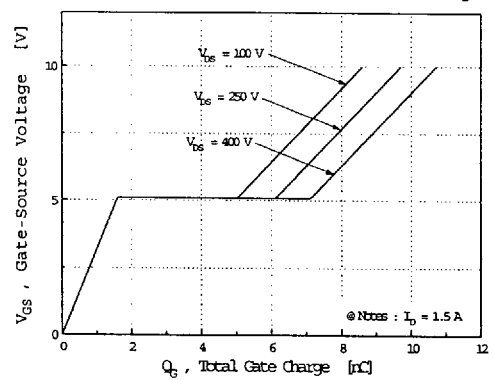

# SSP1N50A

## N-CHANNEL POWER MOSFET

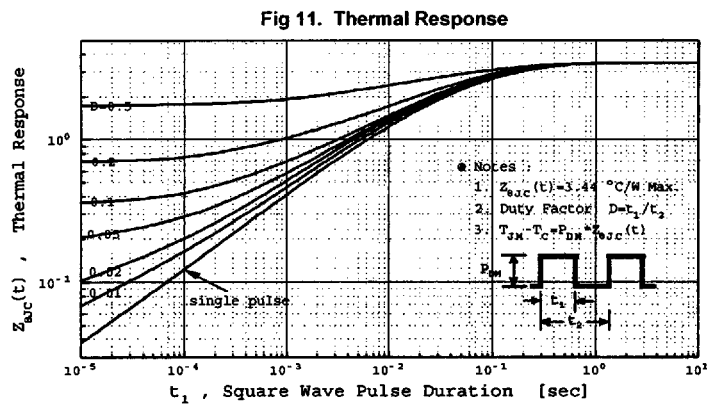
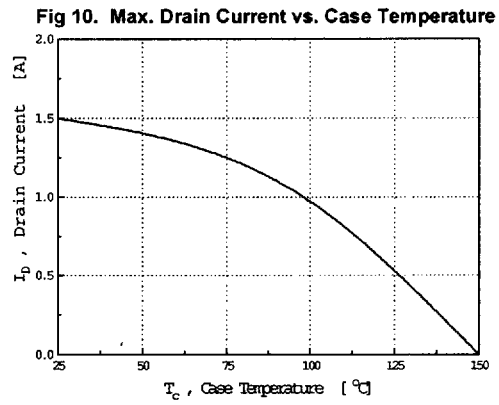
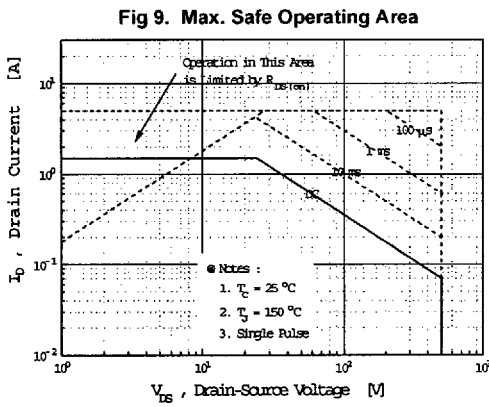
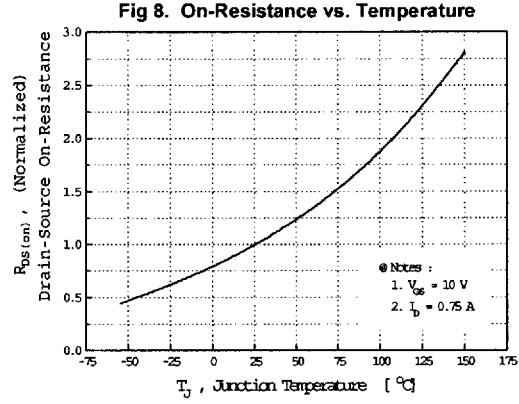
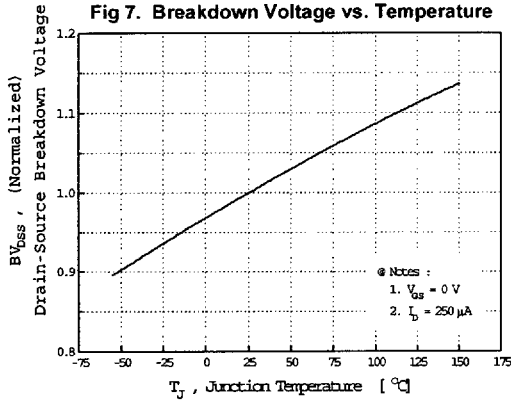


Fig 12. Gate Charge Test Circuit & Waveform

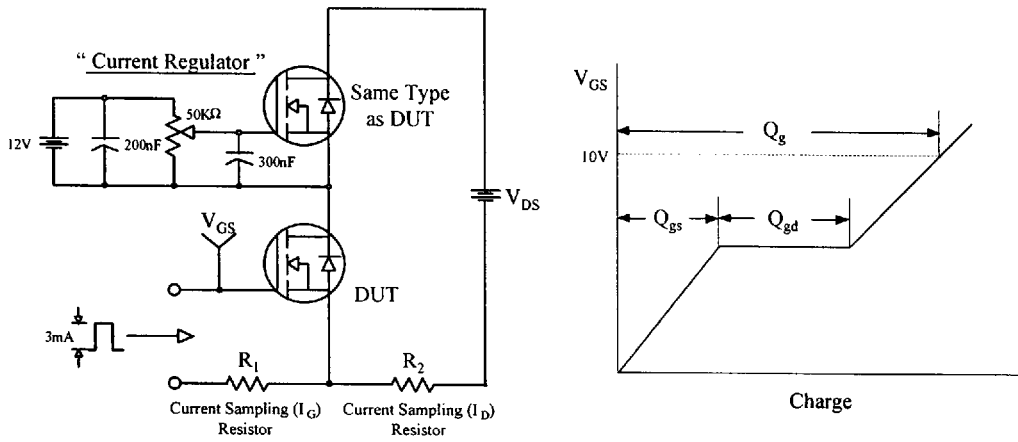


Fig 13. Resistive Switching Test Circuit & Waveforms


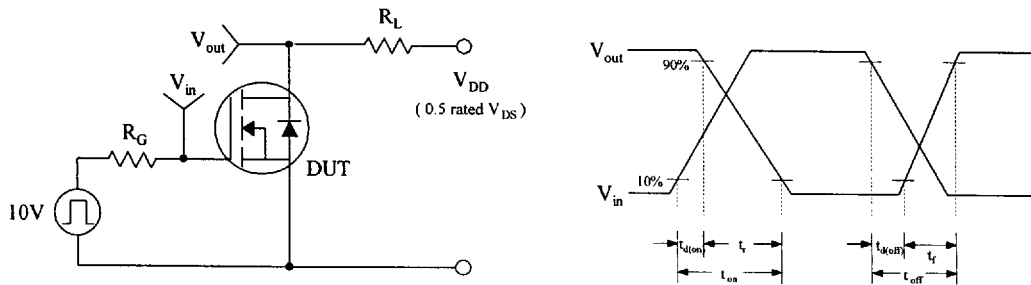



Fig 14. Unclamped Inductive Switching Test Circuit & Waveforms


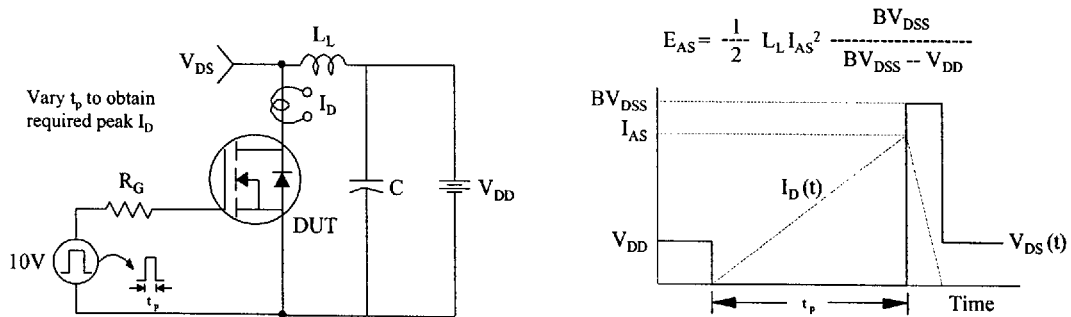


$$E_{AS} = \frac{1}{2} L_L I_{AS}^2 \frac{BV_{DSS}}{BV_{DSS} - V_{DD}}$$


5

Fig 15. Peak Diode Recovery dv/dt Test Circuit & Waveforms

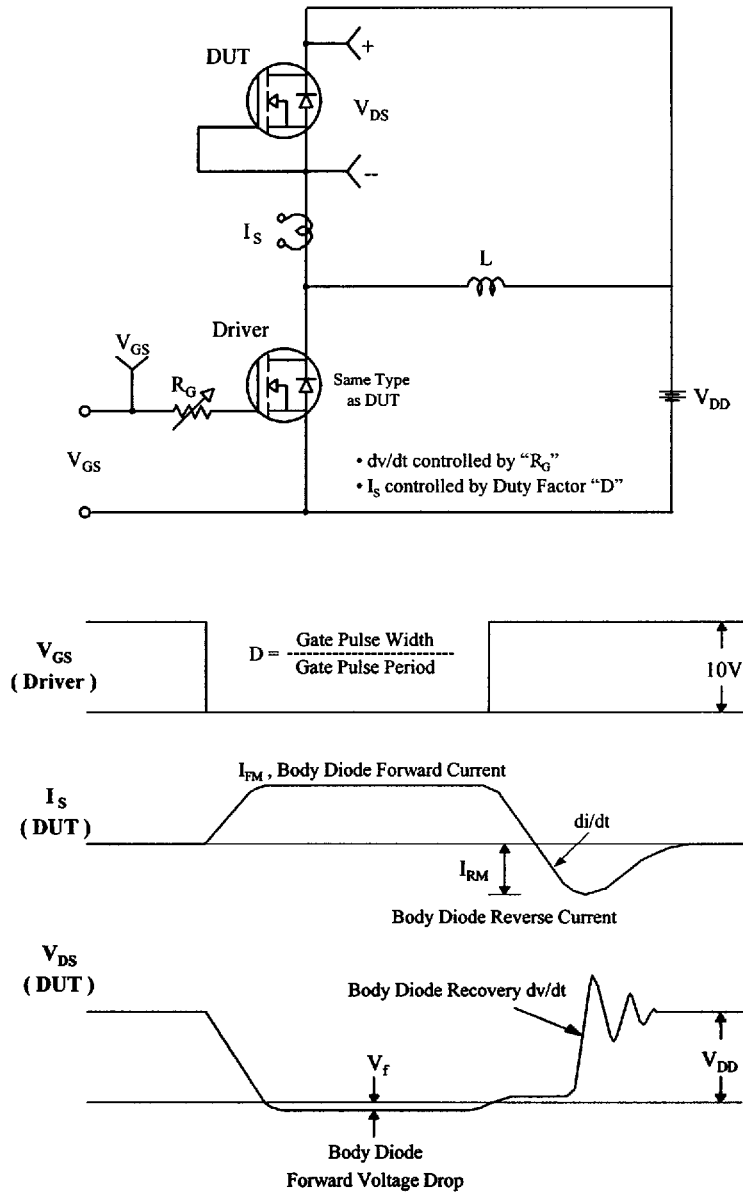


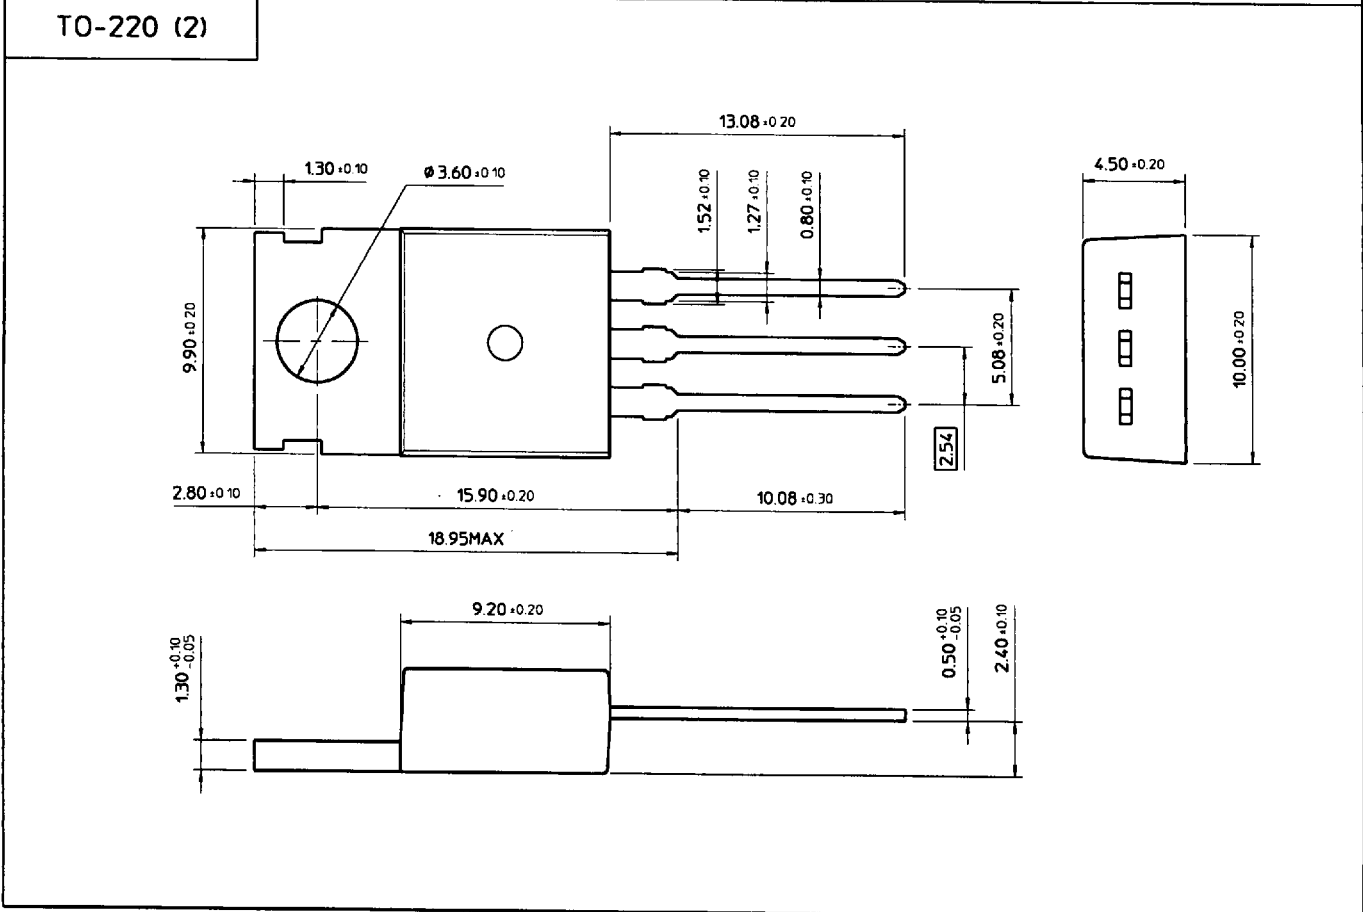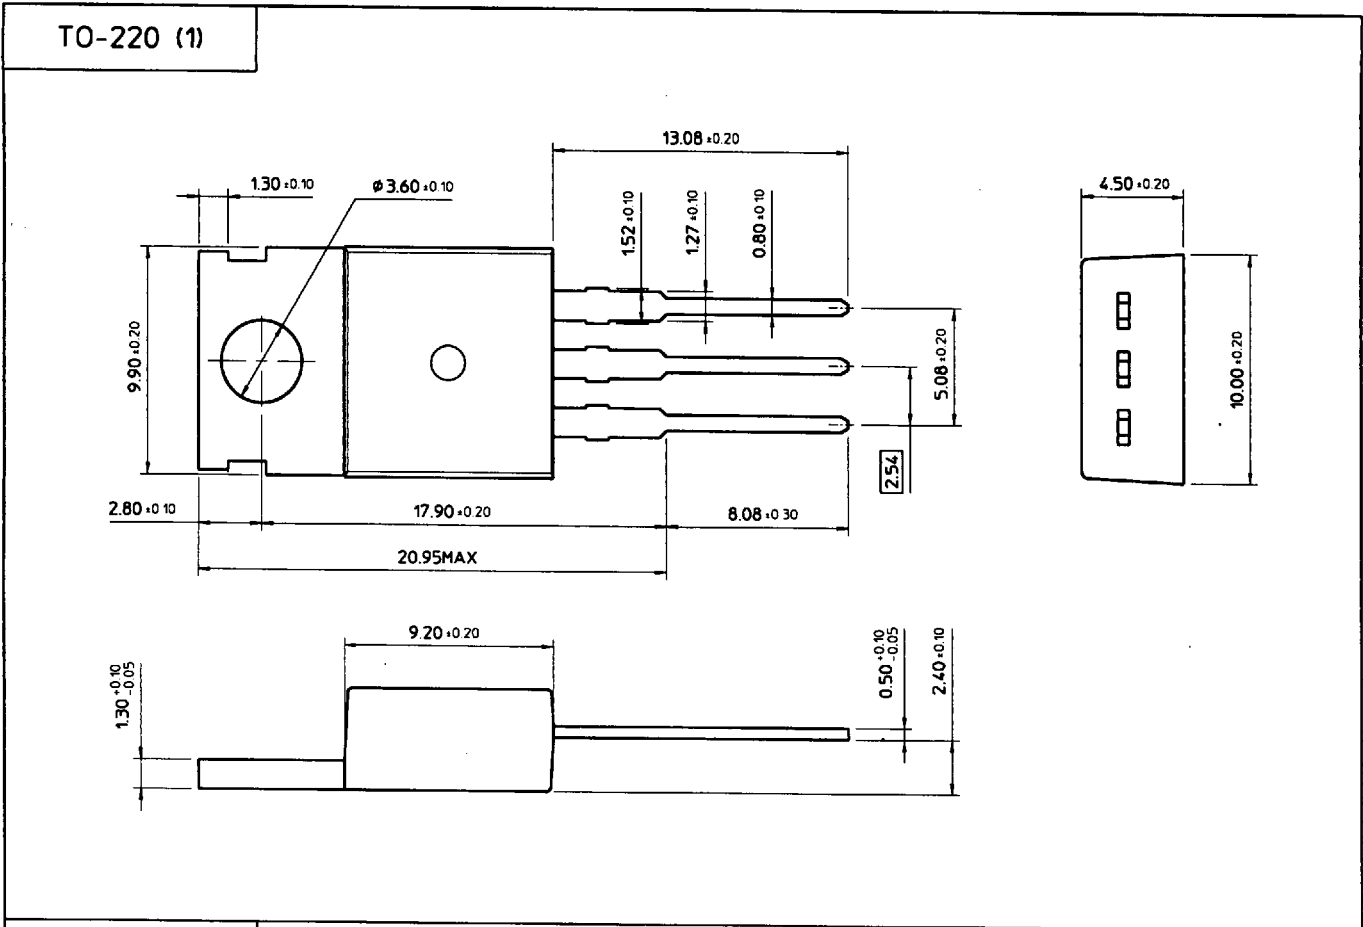

TO-220 (3)

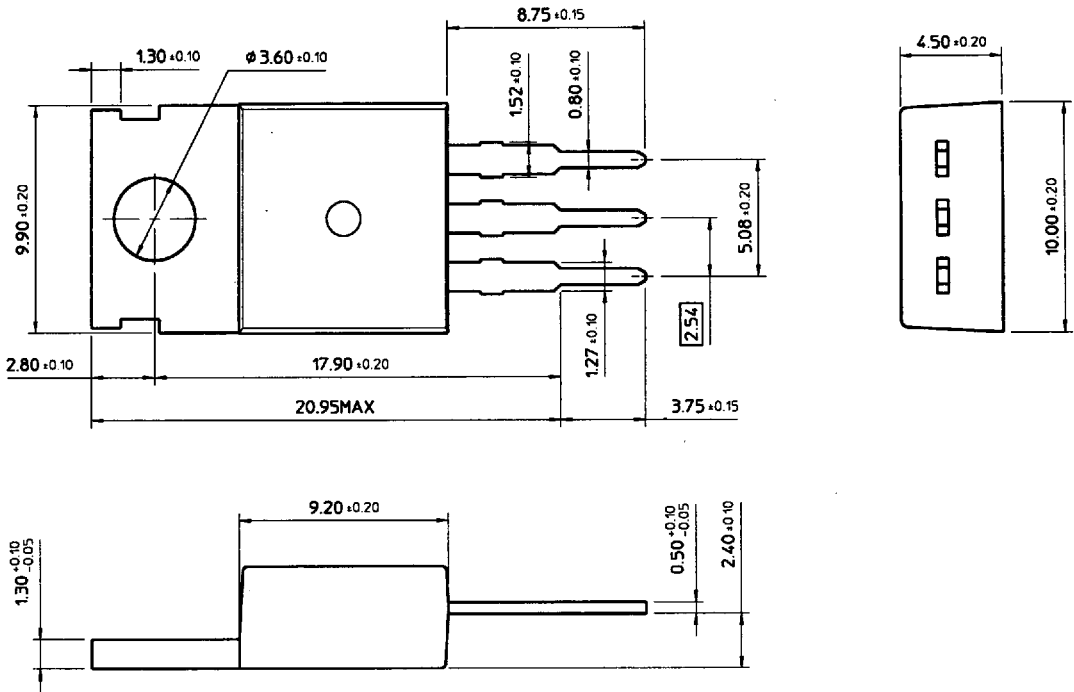


TO-220 (4)

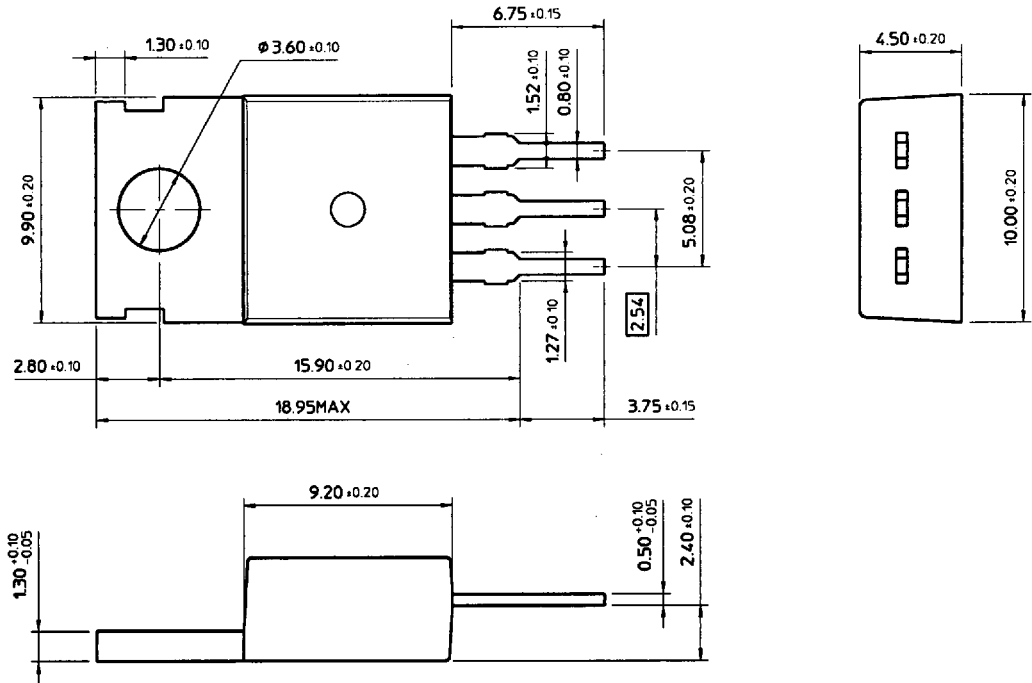



T0-220 (5)

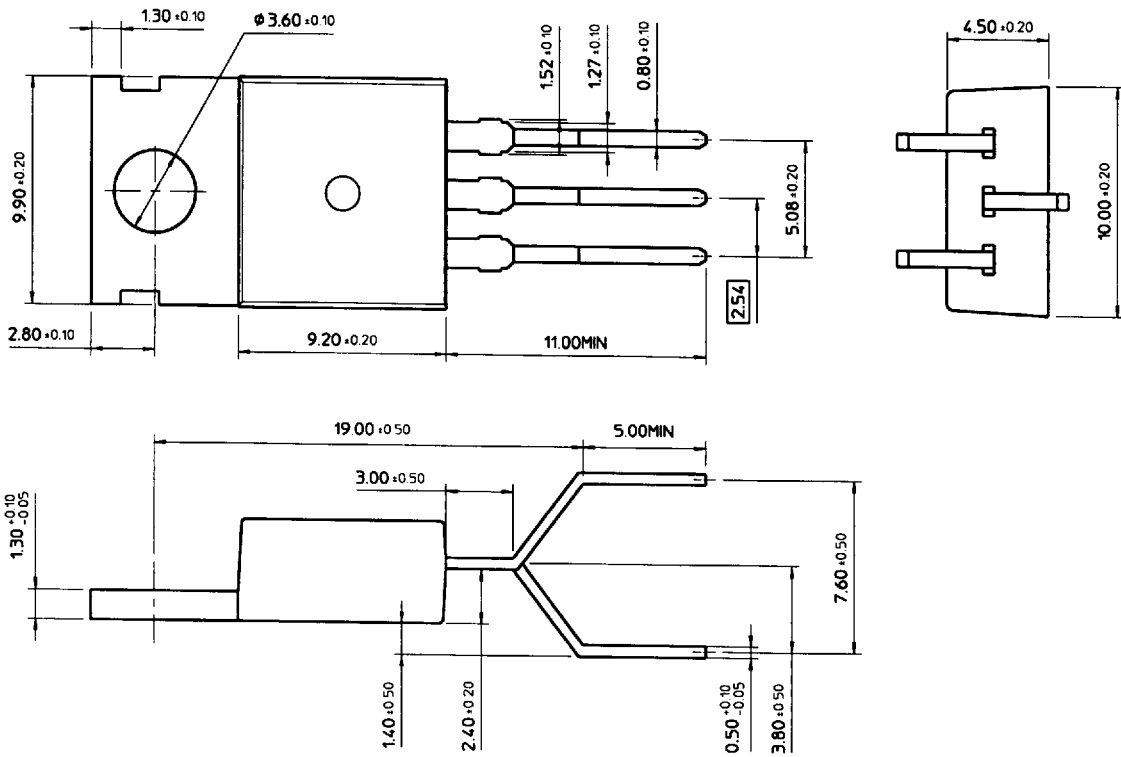

NOTE