

# E-Series 2-Way 0° Power Divider

## 5 - 1000 MHz

### ESSM-2-2-75

V3.00

#### Features

- 2 Way
- 0°
- Surface Mount

#### Specifications @ 25°C

Frequency Range	5 - 1000 MHz	
Insertion Loss	Typical	Maximum
	5 - 50 MHz	0.6 dB / 1.2 dB
	50 - 500 MHz	0.5 dB / 0.9 dB
	500 - 1000 MHz	0.8 dB / 1.5 dB
Isolation	Typical	Minimum
	5 - 50 MHz	33 dB / 20 dB
	50 - 500 MHz	30 dB / 17 dB
	500 - 1000 MHz	18 dB / 11 dB
Amplitude Unbalance	Maximum	
	5 - 50 MHz	0.6 dB
	50 - 500 MHz	0.5 dB
	500 - 1000 MHz	0.5 dB
Phase Unbalance	Maximum	
	5 - 50 MHz	5°
	50 - 500 MHz	3°
	500 - 1000 MHz	6°
Return Loss	Typical	Minimum
	I/P	30 dB / 14 dB
	O/P	20 dB / 11 dB

#### Operating Characteristics

Impedance	75 Ohms Nominal
-----------	-----------------


#### Ordering Information

<b>Part No.</b> ESSM-2-2-75	<b>Packaging</b> Tube
--------------------------------	--------------------------

#### Absolute Maximum Ratings

Parameter	Absolute Maximum
Maximum Power Rating	1 Watt
Internal Load Dissipation	0.125 Watt
Pin Temp (10 sec)	260°C
Storage Temperature	-55°C to 100°C

#### SM-55

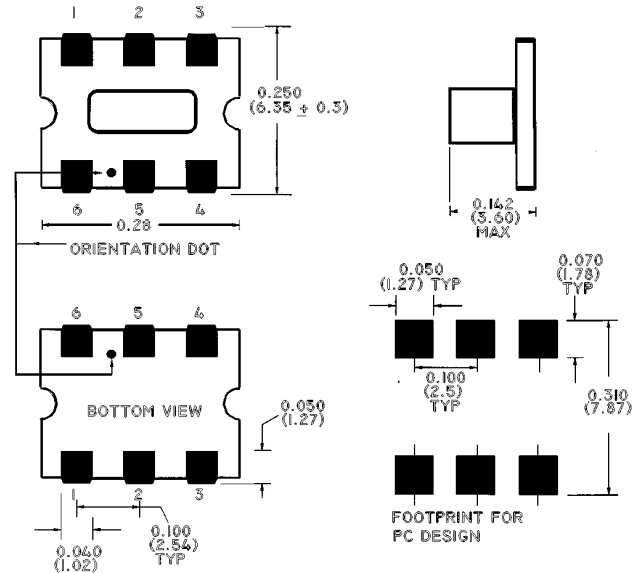

Dimensions in ( ) are in mm.  
Unless Otherwise Noted: .x = ±0.04 (1.00)  
.xx = ±0.02 (0.50)  
.xxx = ±0.010 (0.250)

#### Pin Configuration

Function	Pin No.
Not Connected	5,2
Ground	1
Input	6
Port 1	4
Port 2	3

S 1157 A

Specifications Subject to Change Without Notice.

**M/A-COM, Inc.**

North America: Tel. (800) 366-2266 ■ Asia/Pacific: Tel. +81 (03) 3226-1671 ■ Europe: Tel. +44 (1344) 869 595  
Fax (800) 618-8883 Fax +81 (03) 3226-1451 Fax +44 (1344) 300 020