


DETAIL A:

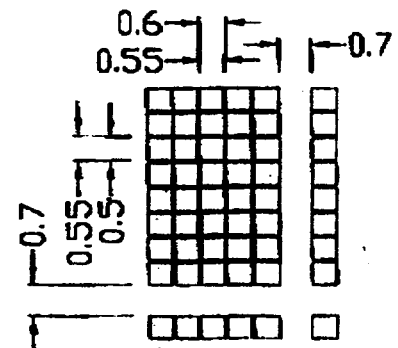

1	2	3	4	5	6	7	8	9	10	11	12	13	14	A	K
V _{SS}	V _{DD}	V _O	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	LED+	LED-

NOTES:

- | | |
|---------------------------------|------------------------|
| 1.DISPLAY TYPE: | STN/YELLOW GREEN MODE |
| 2.VIEWING DIRECTION: | 6:00 |
| 3.POLARIZER MODE: | TRANSFLECTIVE/POSITIVE |
| 4.OPERATING TEMP: | -20°C~+70°C |
| 5.STORAGE TEMP: | -30°C~+80°C |
| 6.LCD OPERATING VOLTAGE: | 4.7V |
| 7.DRIVE METHOD: | 1/16 DUTY 1/5 BIAS |
| 8.BACKLIGHT TYPE: | LED/ALWAYS BE LIGHTED |
| 9.UNMARKED TOLERANCE: | ±0.3mm |
| 10.CONTROLLER: | SPLC780A1-01C-C |
| 11.BEZEL IS TO BE PAINTED BLACK | |
| 12.CABLE:14PIN | |



TIAN-MA MICROELECTRONICS CO.

6/F., CASTIC Building, Siemen Road, Central, Shenzhen, China

DRAWN BY: [Signature]
 CHECKED BY: [Signature]
 APPROVED BY: [Signature]
 CONFIRMED BY: [Signature]

TITLE: TM162A3BCW7

DWG NO: G-1

DWG NAME: TM162A3BCW7-1

SCALE: 1:1
 DATE: 2000
 SHEET NO: 01 OF 01