


LOW VOLTAGE RECTIFIER Transformer
with horizontal channel frames.

- Primary voltage, 115 Volts, 60 Hz.
- Primary and secondary leads 8-10" long.
- 2-hole horizontal mounting.
- 5 sizes are available, covering the range: 10 to 50 VA.
- CSA listed (LR 47366).



MECHANICAL

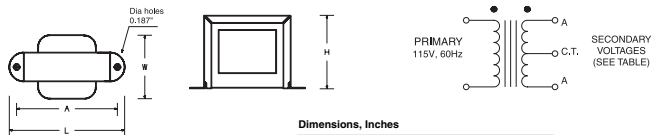

Dimensions, Inches

P/N	DIMENSIONS			PIN SPACING A
	L	W	H	
4766	3.25	2.00	2.00	2.81
4767	3.25	2.25	2.00	2.81
4768	3.69	2.13	2.31	3.13
4769	4.00	2.25	2.63	3.56
4770	4.00	2.50	2.63	3.56

ELECTRICAL SPECIFICATION

Part No.	Secondary Voltages (A-A)			Part No.	Secondary Voltages (A-A)		
	F.L. Volts	N.L. Volts	Current Amps		F.L. Volts	N.L. Volts	Current Amps
4766-01	6.3	7.25	1.20	4769-01	14.0	15.30	2.00
4766-02	6.3	7.14	2.00	4769-02	18.0	19.60	1.50
4766-03	10.0	11.00	1.00				
4766-04	14.0	16.00	1.00	4770-01	8.5	9.04	4.00
4766-05	20.0	22.00	0.50	4770-02	10.0	10.50	3.00
4766-06	28.0	32.00	0.50	4770-03	16.0	17.00	2.20
4766-07	30.0	34.20	0.50	4770-04	16.0	17.40	3.00
4766-08	36.0	39.40	0.30	4770-05	20.0	21.40	2.00
4766-09	44.0	50.60	0.25	4770-06	25.0	26.80	1.50
4766-10	50.0	57.00	0.30	4770-07	33.0	35.00	1.00
				4770-08	36.0	39.50	1.00
4767-01	8.5	9.60	2.00	4770-09	44.0	47.40	1.00
4767-02	36.0	40.00	0.50	4770-10	50.0	54.50	1.00
4767-03	16.0	17.60	1.00	4770-11	60.0	65.20	0.50
				4770-12	80.0	85.50	0.50
4768-01	6.3	6.90	4.00	4770-13	100.0	107.00	0.50
4768-02	8.5	9.50	3.00	4770-14	120.0	129.50	0.30
4768-03	10.0	10.80	2.00				
4768-04	12.6	13.80	2.00				
4768-05	20.0	22.00	1.00				
4768-06	25.0	27.50	1.00				
4768-07	28.0	30.80	1.00				
4768-08	44.0	48.10	0.50				
4768-09	50.0	55.00	0.50				