



LOW VOLTAGE RECTIFIER Transformers.
Open style with L-bracket mounting.

- Primary voltage, 115 Volts, 60 Hz.
- Primary and secondary leads 8-10" long.
- 4-hole horizontal L-bracket mounting.
- 15 sizes are available, covering the range: 35 to 450 VA.
- CSA listed (LR 47366).



MECHANICAL

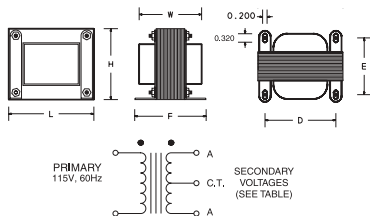

Dimensions, Inches

P/N	DIMENSIONS					
	L	W	H	D	E	F
4781	3.00	2.50	2.60	2.50	2.00	2.60
4782	3.00	2.75	2.60	2.50	2.25	2.85
4783	3.00	3.00	2.60	2.50	2.50	3.10
4784	3.00	3.25	2.60	2.50	2.75	3.35
4785	3.00	3.50	2.60	2.50	3.00	3.60
4786	3.75	3.25	3.20	3.13	2.13	2.85
4787	3.75	3.50	3.20	3.13	2.50	3.10
4788	3.75	3.75	3.20	3.13	2.75	3.35
4789	3.75	3.87	3.20	3.13	2.88	3.48
4790	3.75	4.00	3.20	3.13	3.00	3.60
4791	3.75	4.13	3.20	3.13	3.13	3.75
4792	4.50	4.00	3.85	3.75	2.50	3.10
4793	4.50	4.25	3.85	3.75	2.75	3.35
4794	4.50	4.50	3.85	3.75	3.00	3.60
4795	4.50	4.75	3.85	3.75	3.25	3.85

ELECTRICAL SPECIFICATION

Part No.	Secondary Voltages (A-A)		
	F.L. Volts	N.L. Volts	Current Amps
4781-01	5.0	5.35	8.00
4781-02	6.3	6.70	6.00
4781-03	10.0	10.70	4.00
4782-01	5.0	5.35	10.00
4782-02	10.0	10.70	5.00
4782-03	11.0	11.80	5.00
4782-04	18.0	19.40	3.00
4782-05	28.0	29.80	2.00
4783-01	5.0	5.30	15.00
4783-02	6.3	6.70	10.00
4784-01	10.0	10.60	8.00
4784-02	12.6	13.60	6.00
4785-01	5.0	5.30	20.00
4785-02	10.0	10.60	10.00
4785-03	12.6	13.30	8.00
4785-04	14.0	15.10	6.00
4785-05	18.0	18.70	5.00
4785-06	42.0	43.90	2.00
4785-07	50.0	53.20	2.00
4786-01	7.5	8.10	15.00
4786-02	11.0	11.80	10.00

Part No.	Secondary Voltages (A-A)		
	F.L. Volts	N.L. Volts	Current Amps
4787-01	12.6	13.20	10.00
4787-02	25.0	27.20	5.00
4788-01	30.0	31.40	5.00
4789-01	25.0	26.60	3.00
4790-01	5.0	5.30	30.00
4790-02	7.5	8.00	21.00
4790-03	11.0	11.70	15.00
4790-04	18.0	18.80	10.00
4791-01	3.0	3.12	50.00
4791-02	10.0	10.70	20.00
4792-01	12.6	13.00	20.00
4792-02	18.0	18.80	15.00
4792-03	25.0	26.10	10.00
4792-04	30.0	31.40	10.00
4793-01	60.0	62.00	5.00
4793-02	80.0	82.50	4.00
4794-01	18.0	18.50	20.00
4795-01	22.0	22.50	20.00