

SHINDENGEN

Schottky Rectifiers (SBD)

Dual


DF10SC6

60V 10A

OUTLINE DIMENSIONS

Case : STO-220

Unit : mm

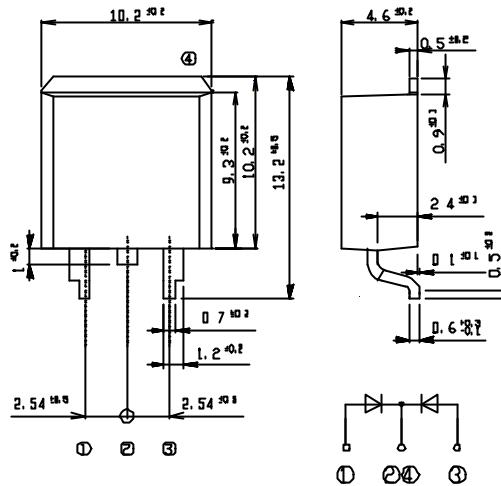

RATINGS

Absolute Maximum Ratings (If not specified Tc=25)


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	Tstg		-55 ~ 150	
Operating Junction Temperature	T _j		150	
Peak Reverse Voltage	V _{RM}		60	V
Repetitive Peak Surge Reverse Voltage	V _{RRSM}	Pulse width 0.5ms, duty 1/40	65	V
Average Rectified Forward Current	I _o	50Hz sine wave, R-load, Rating for each diode I _o /2, T _c =132	10	A
Peak Surge Forward Current	I _{FSM}	50Hz sine wave, Non-repetitive 1 cycle peak value, T _j =25	150	A
Repetitive Peak Surge Reverse Power	P _{RRSM}	Pulse width 10 μ s, Rating of per diode, T _j =25	330	W


Electrical Characteristics (If not specified Tc=25)

Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V _F	I _F =5A, Pulse measurement, Rating of per diode	Max.0.58	V
Reverse Current	I _R	V _R =V _{RM} , Pulse measurement, Rating of per diode	Max.4.5	mA
Junction Capacitance	C _j	f=1MHz, V _R =10V, Rating of per diode	Typ.260	pF
Thermal Resistance	jc	junction to case	Max.2.0	/W

DF10SC6


Forward Voltage

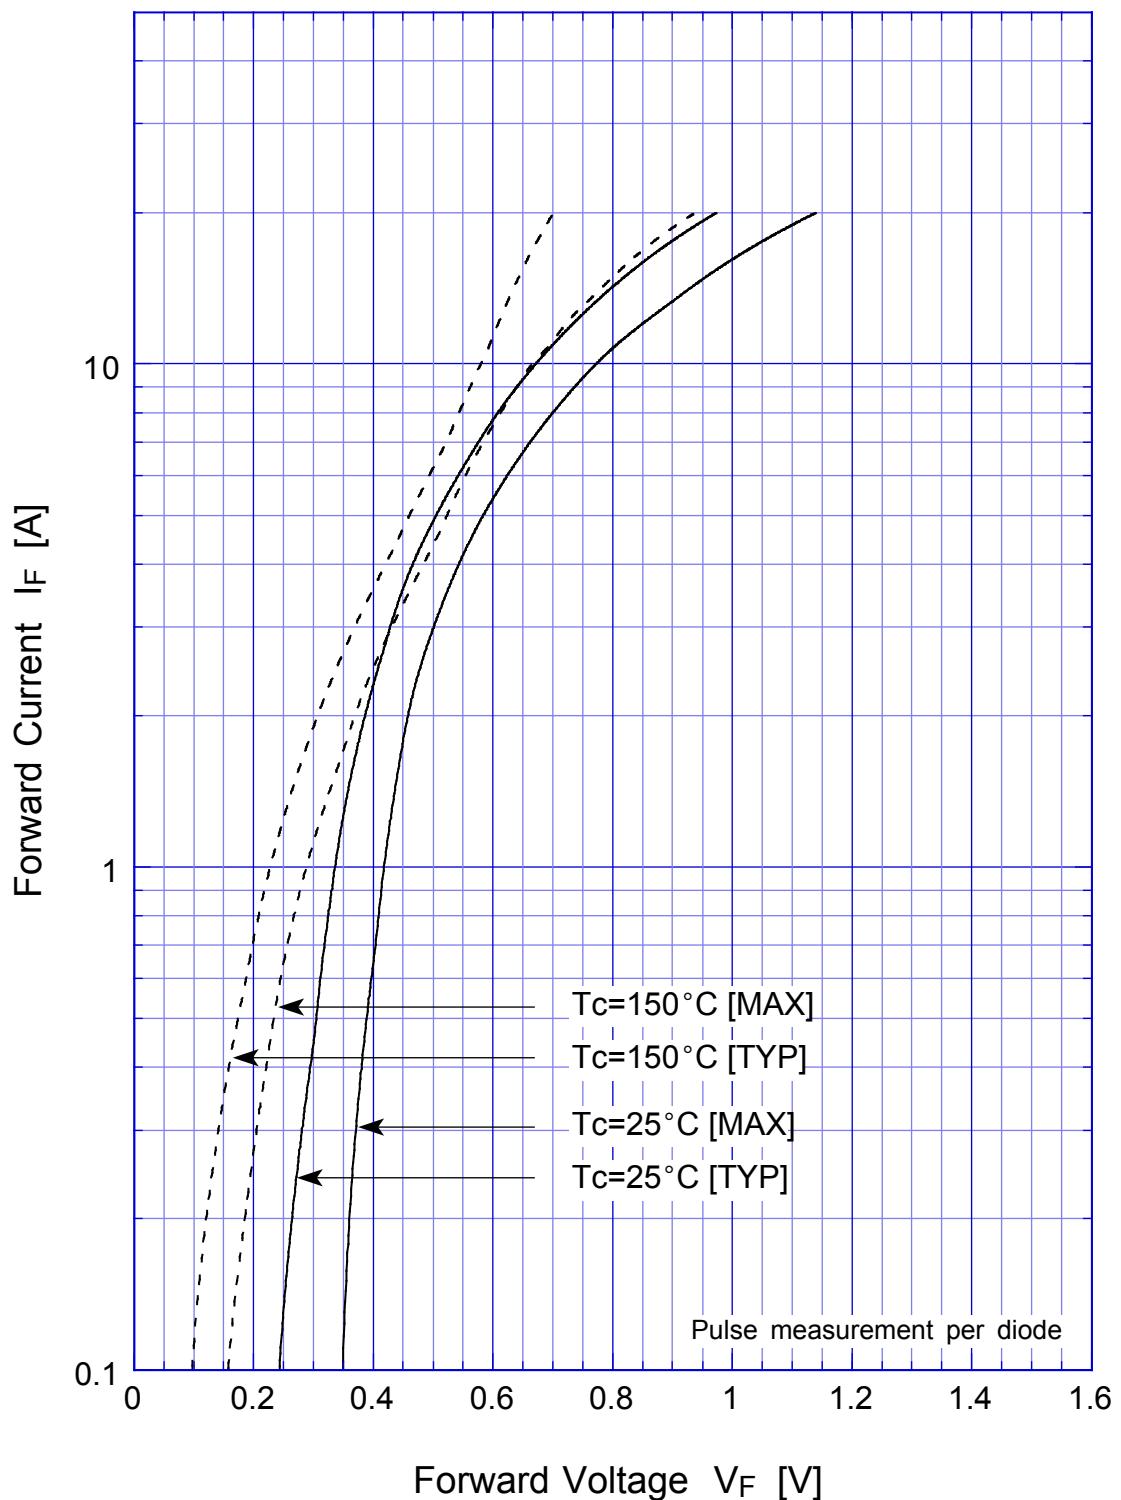

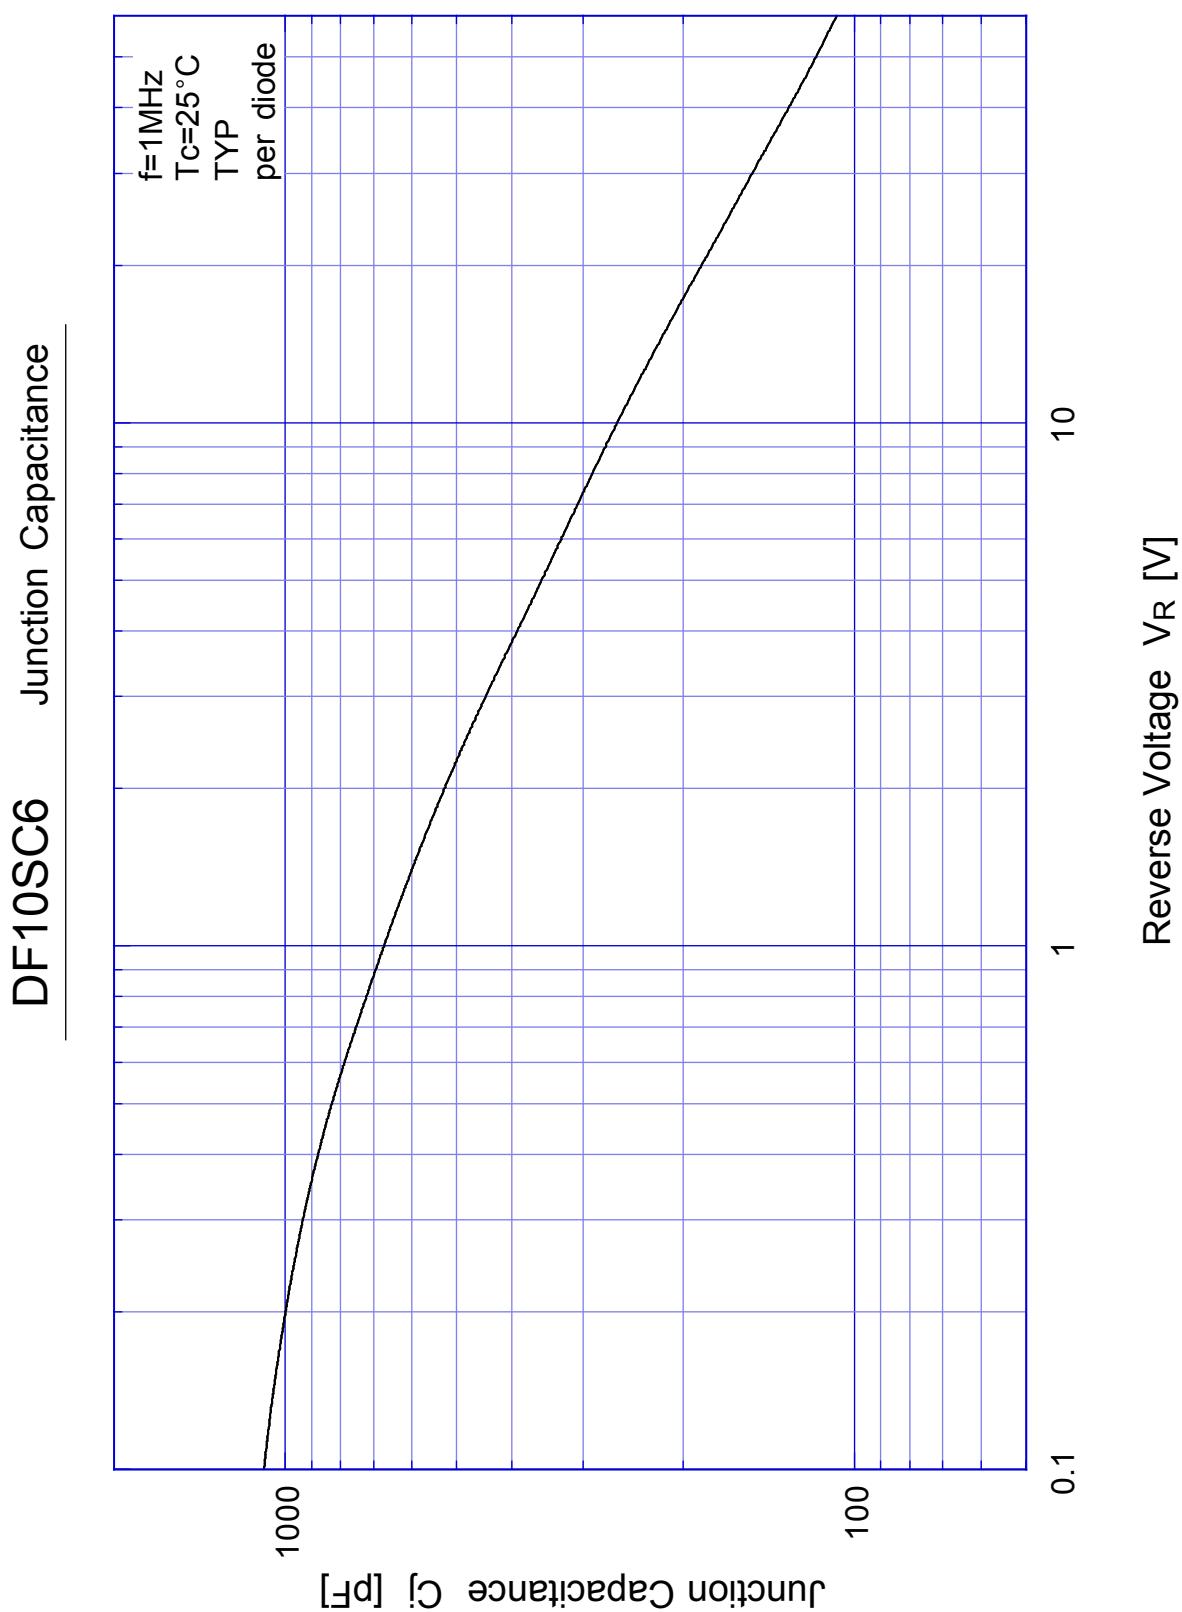


DF10SC6


Reverse Current

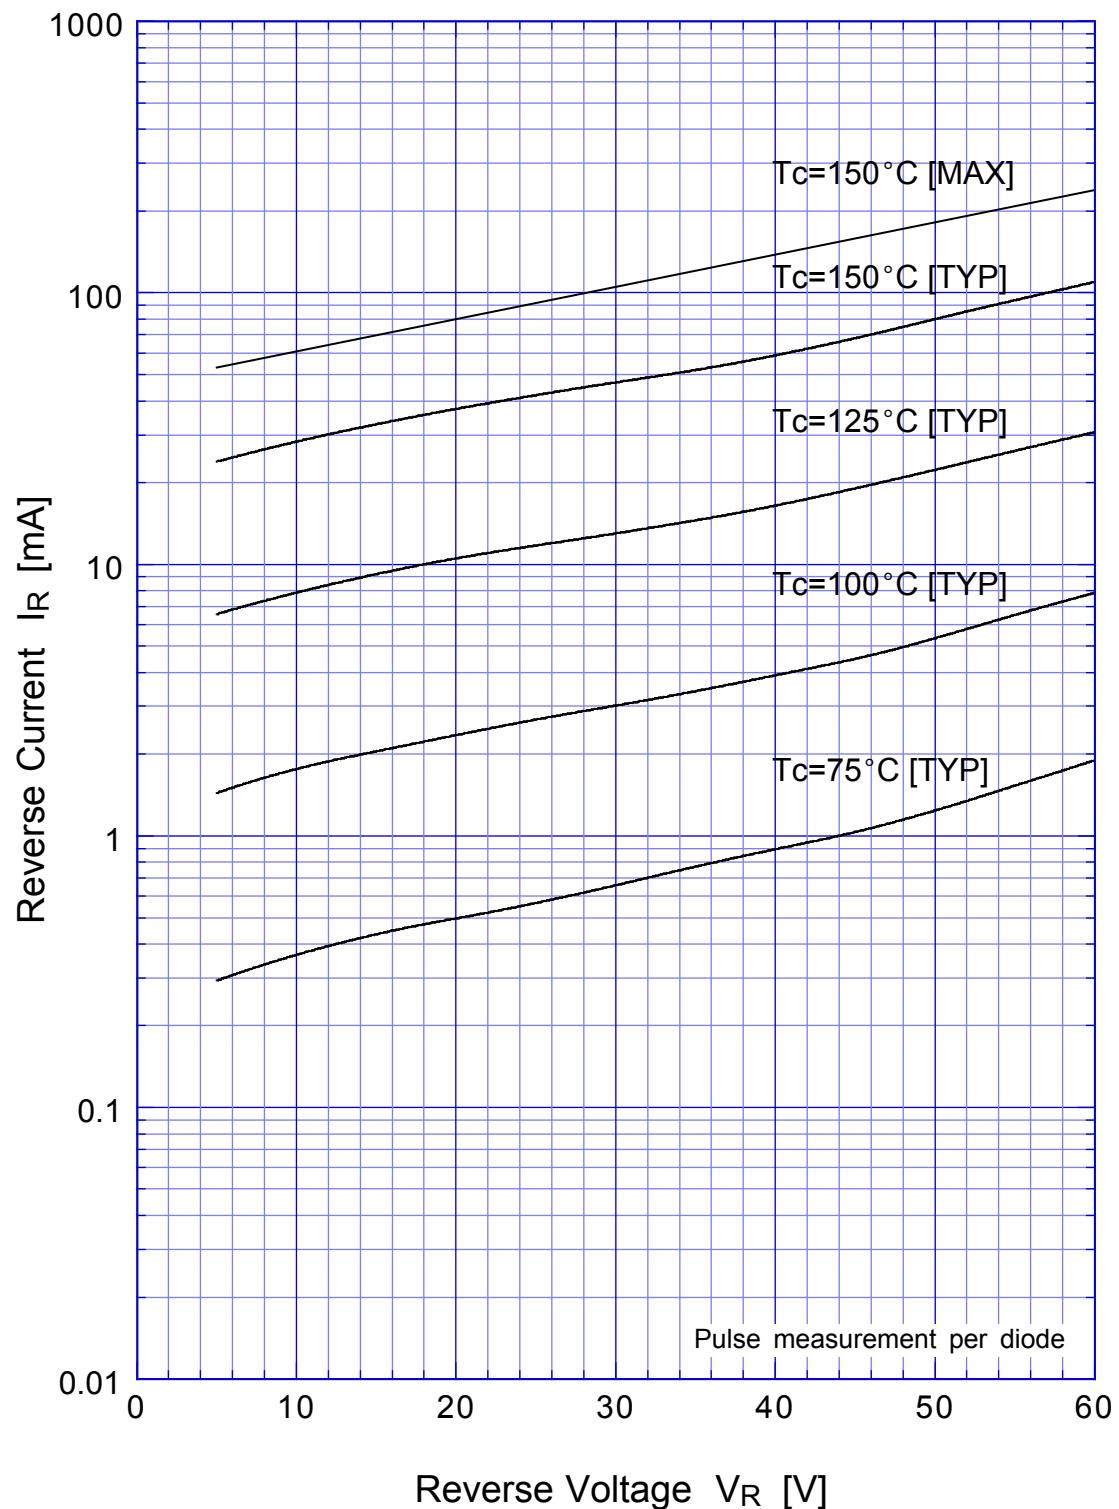



DF10SC6 Reverse Power Dissipation


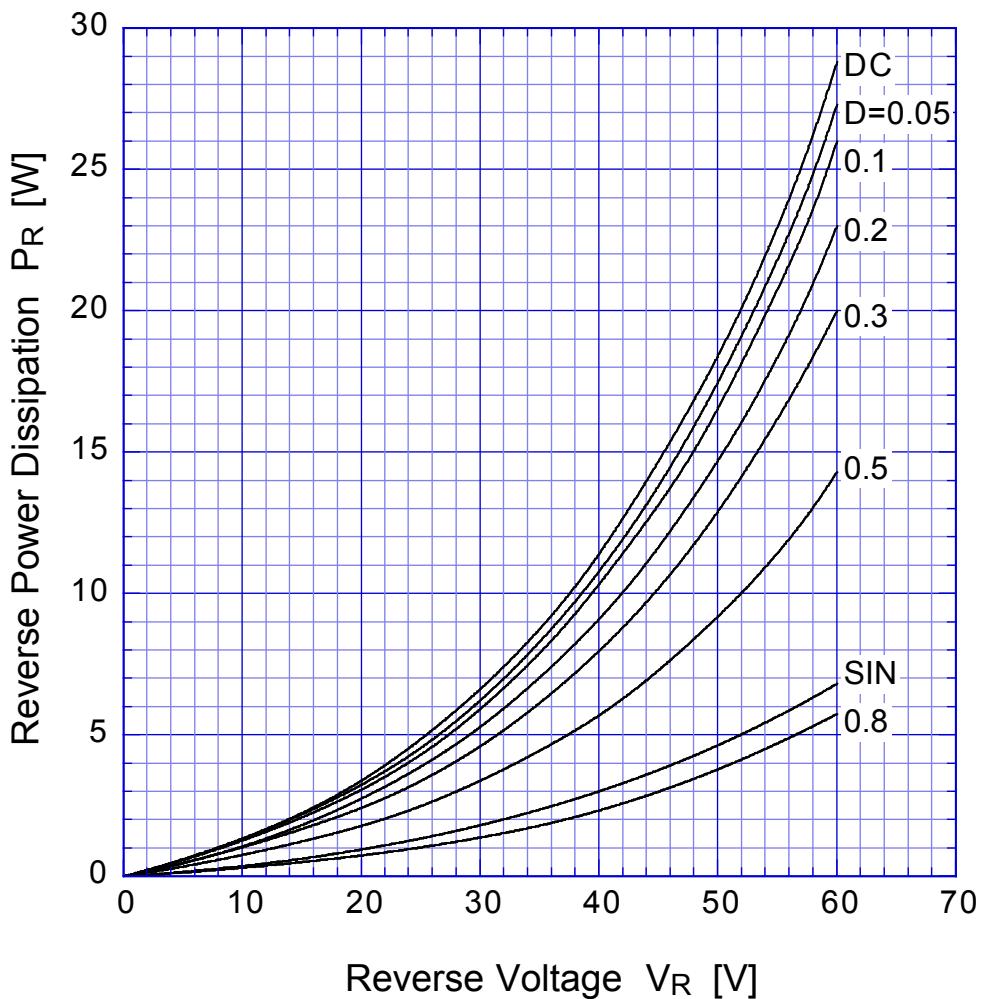


$T_j = 150^\circ\text{C}$

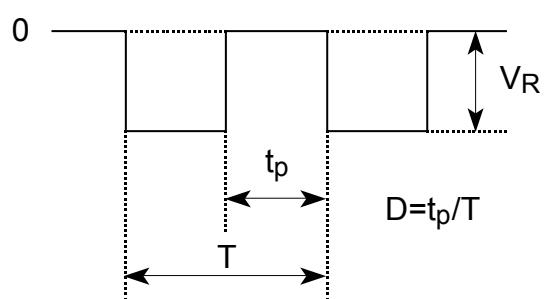


DF10SC6 Forward Power Dissipation

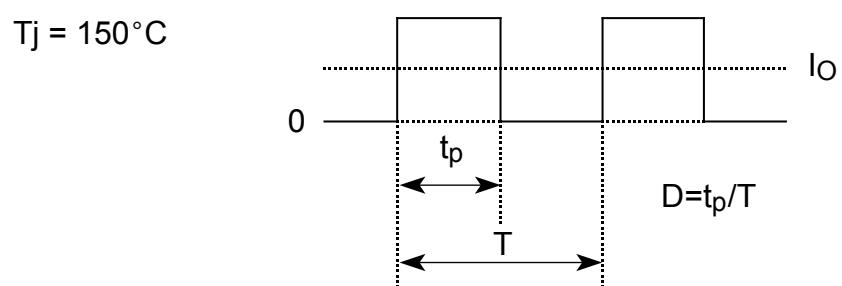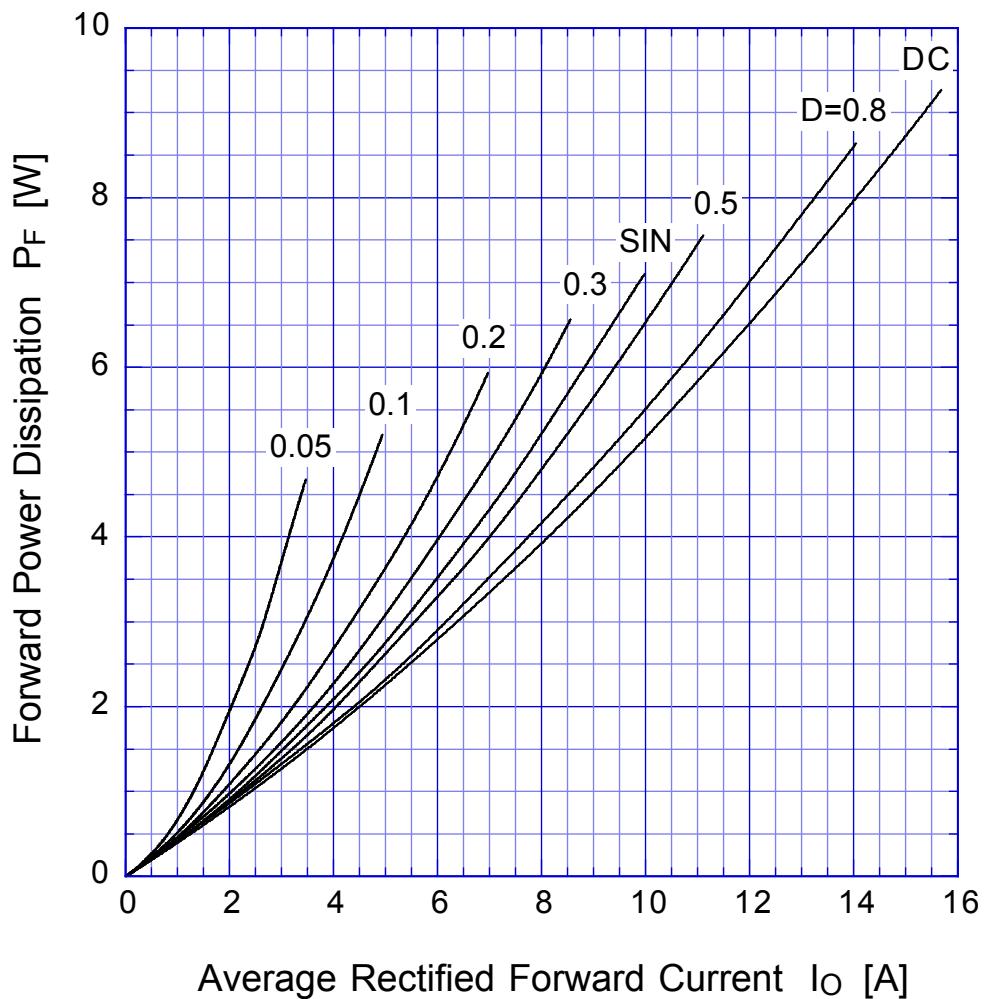

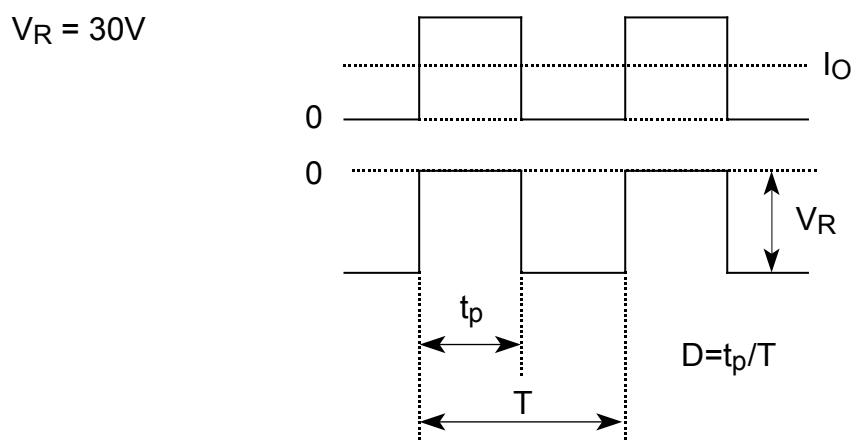
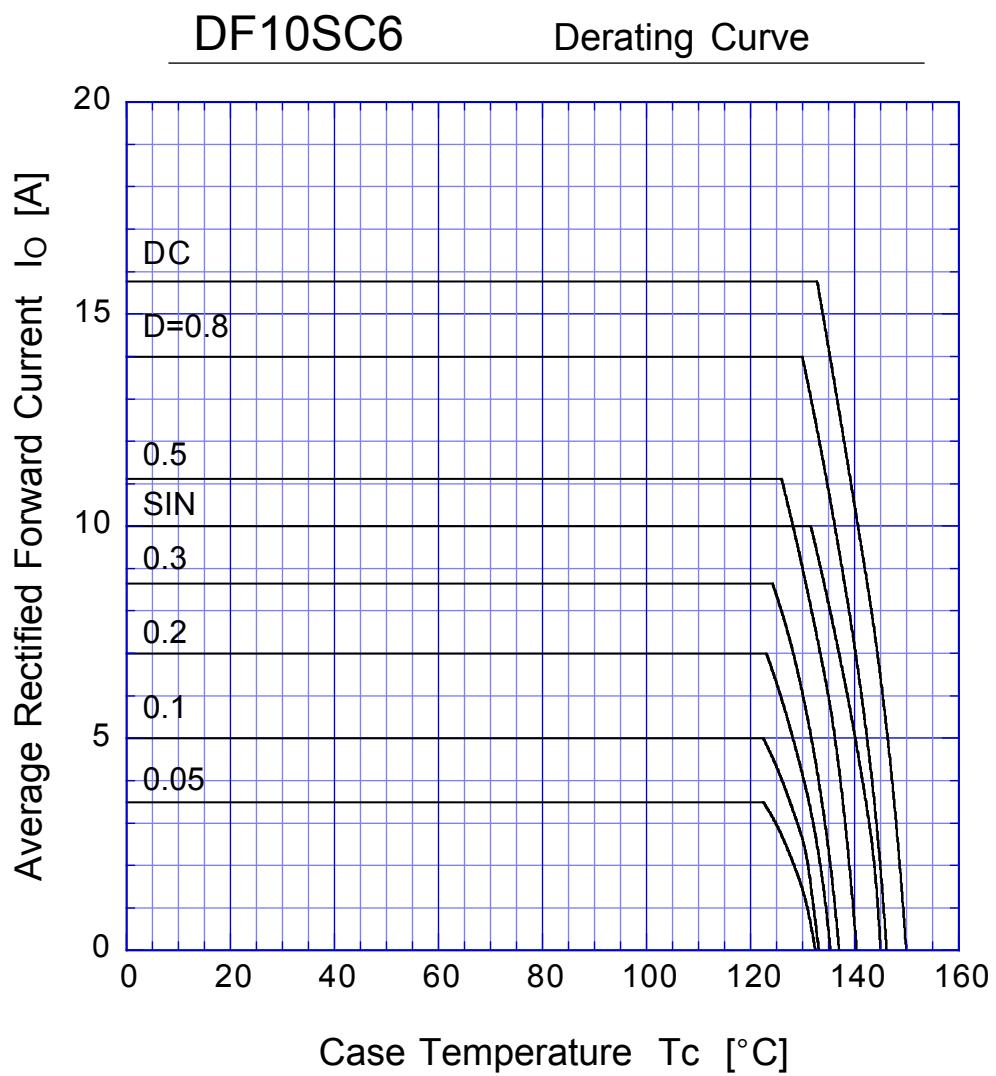


DF10SC6

Peak Surge Forward Capability

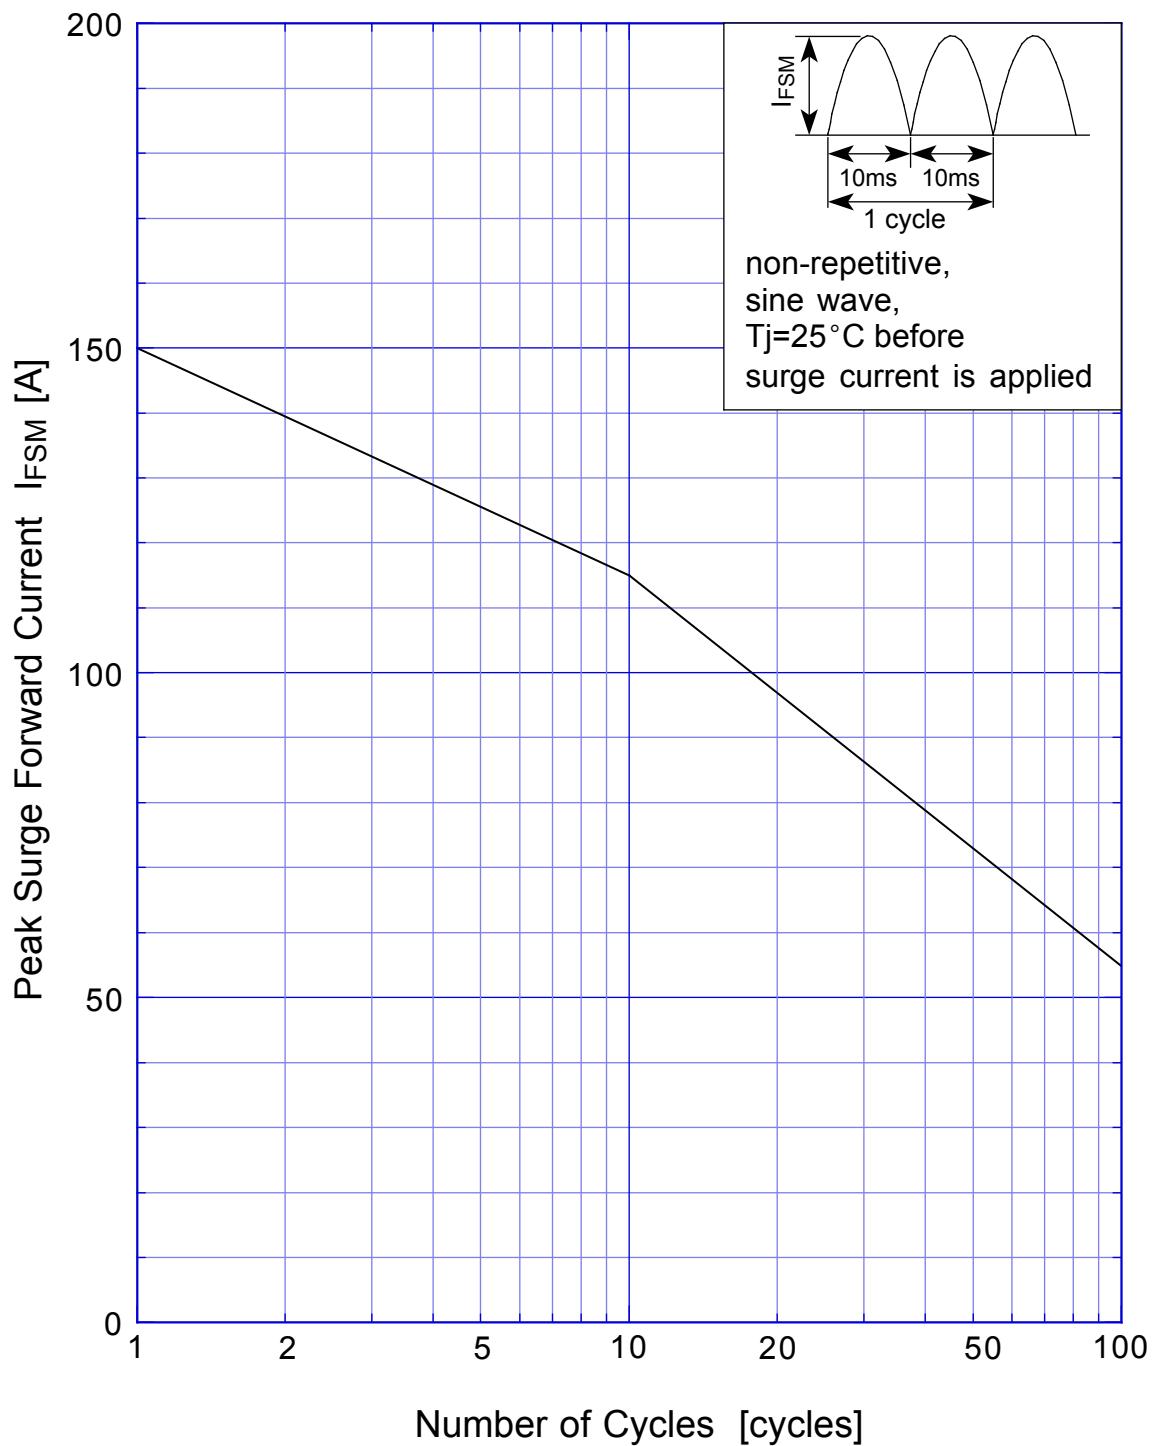

SBD Repetitive Surge Reverse Power Derating Curve

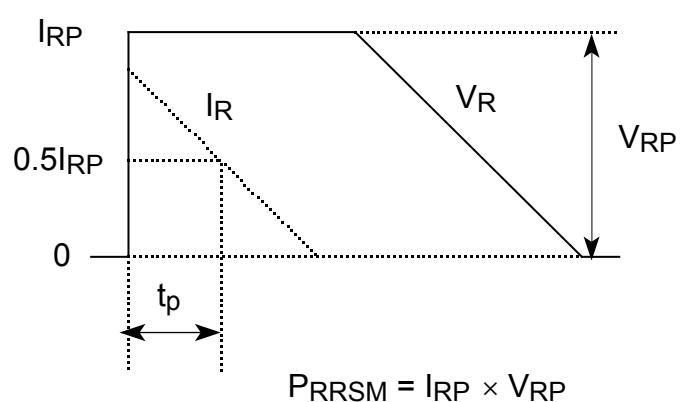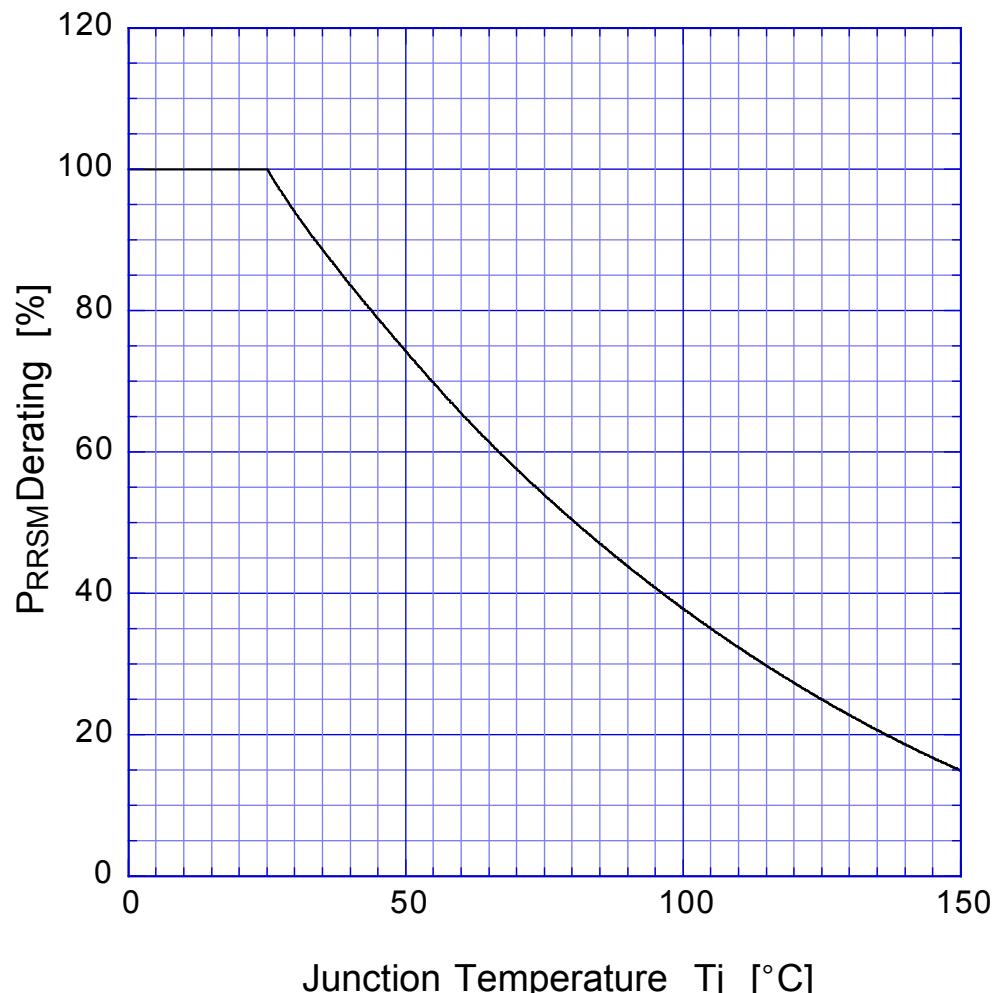

SBD Repetitive Surge Reverse Power Capability

