
2SC4994

Silicon NPN Epitaxial

HITACHI

ADE-208-012
1st. Edition

Application

VHF / UHF wide band amplifier

Features

- Σ High gain bandwidth product
 $f_T = 10.5 \text{ GHz Typ}$
- Σ High gain, low noise figure
 $PG = 17.0 \text{ dB Typ}$, $NF = 1.2 \text{ dB Typ}$ at $f = 900 \text{ MHz}$

Outline

CMPAK-4



- 1. Collector
- 2. Emitter
- 3. Base
- 4. Emitter

2SC4994

Absolute Maximum Ratings (Ta = 25°C)

Item	Symbol	Ratings	Unit
Collector to base voltage	V_{CBO}	15	V
Collector to emitter voltage	V_{CEO}	8	V
Emitter to base voltage	V_{EBO}	1.5	V
Collector current	I_C	20	mA
Collector power dissipation	P_C	100	mW
Junction temperature	T_J	150	°C
Storage temperature	T_{stg}	−55 to +150	°C



Electrical Characteristics (Ta = 25°C)


Item	Symbol	Min	Typ	Max	Unit	Test conditions
Collector cutoff current	I_{CBO}	—	—	10	μA	$V_{CB} = 15\text{ V}, I_E = 0$
	I_{CEO}	—	—	1	mA	$V_{CE} = 8\text{ V}, R_{BE} = \bullet$
Emitter cutoff current	I_{EBO}	—	—	10	μA	$V_{EB} = 1.5\text{ V}, I_C = 0$
DC current transfer ratio	h_{FE}	50	120	250		$V_{CE} = 5\text{ V}, I_C = 10\text{ mA}$
Collector output capacitance	C_{ob}	—	0.4	0.75	pF	$V_{CB} = 5\text{ V}, I_E = 0, f = 1\text{ MHz}$
Gain bandwidth product	f_T	7.5	10.5	—	GHz	$V_{CE} = 5\text{ V}, I_C = 10\text{ mA}$
Power gain	PG	14.0	17.0	—	dB	$V_{CE} = 5\text{ V}, I_C = 10\text{ mA}, f = 900\text{ MHz}$
Noise figure	NF	—	1.2	2.5	dB	$V_{CE} = 5\text{ V}, I_C = 5\text{ mA}, f = 900\text{ MHz}$


Note: Marking is “YS—”.

Attention: This device is very sensitive to electro static discharge.


It is recommended to adopt appropriate cautions when handling this transistor.

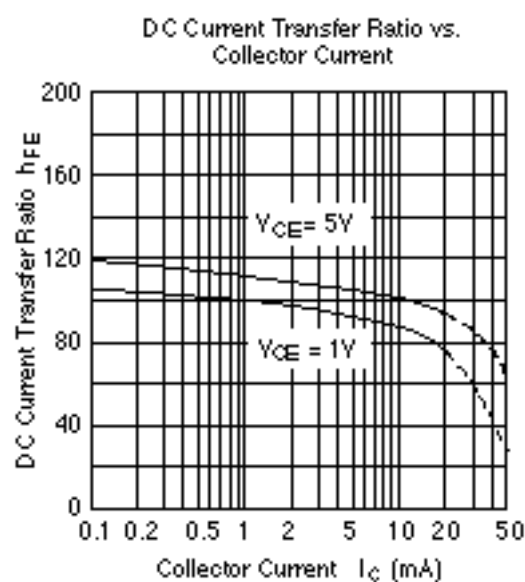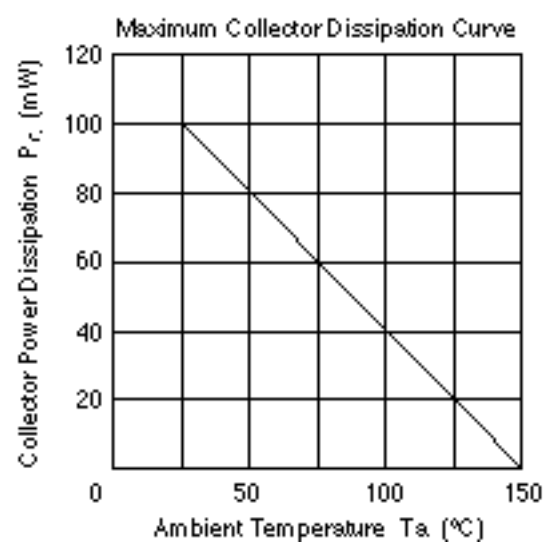

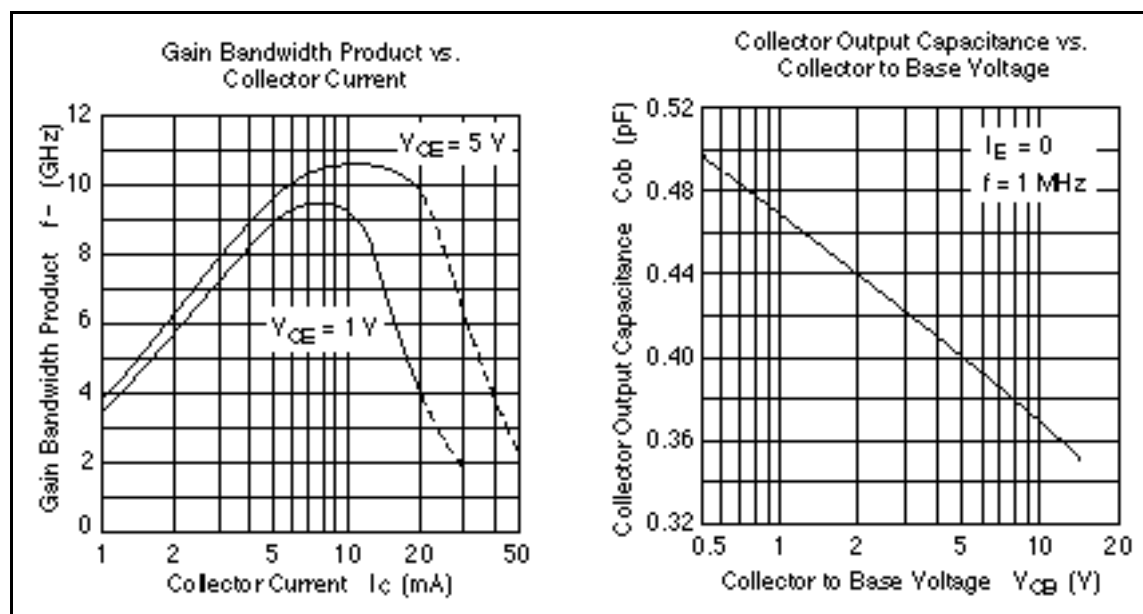

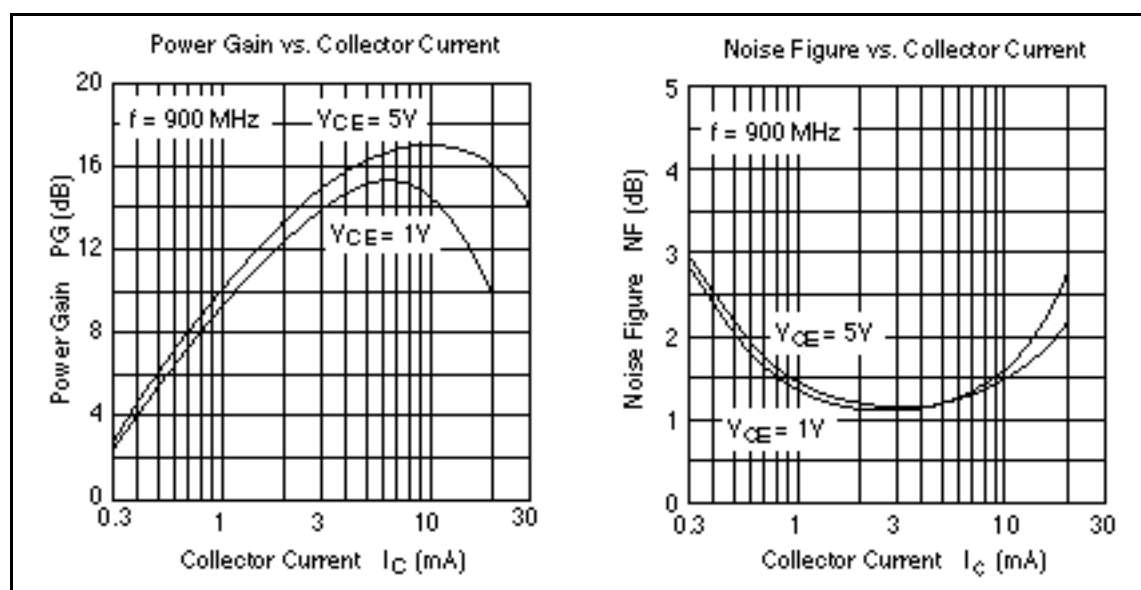


S11 Parameter vs. Frequency

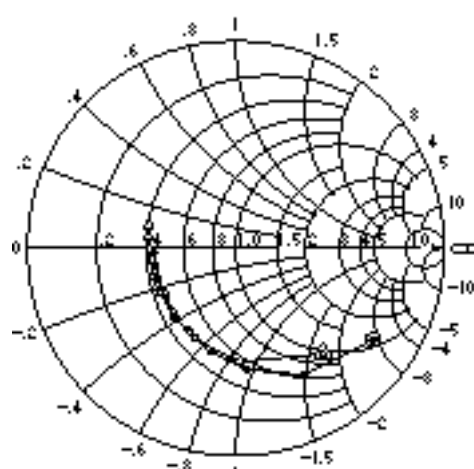


Condition: $V_{CE} = 5\text{ V}$, $Z_0 = 50\ \Omega$
 200 to 2000 MHz (200 MHz step)
 ○ — (IC = 5 mA)
 △ — (IC = 10 mA)

S21 Parameter vs. Frequency

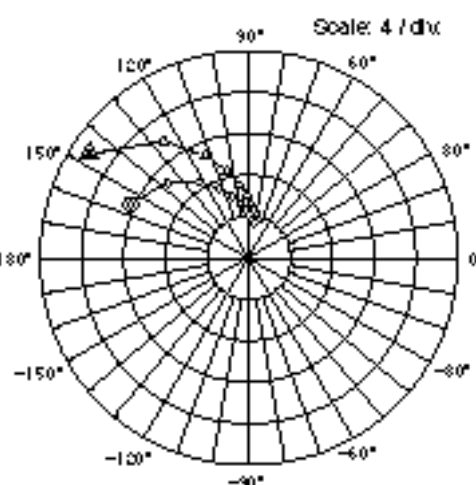


Condition: $V_{CE} = 5\text{ V}$, $Z_0 = 50\ \Omega$
 200 to 2000 MHz (200 MHz step)
 ○ — (IC = 5 mA)
 △ — (IC = 10 mA)

S12 Parameter vs. Frequency

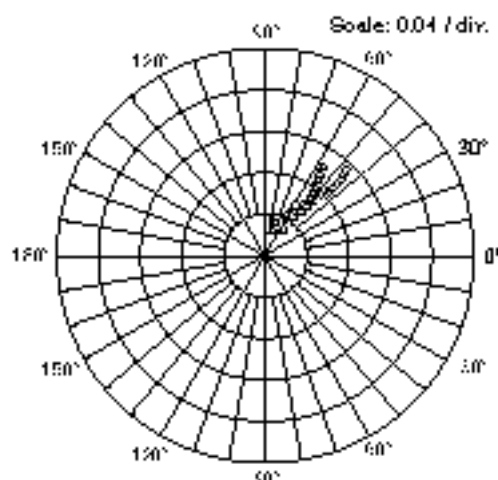


Condition: $V_{CE} = 5\text{ V}$, $Z_0 = 50\ \Omega$
 200 to 2000 MHz (200 MHz step)
 ○ — (IC = 5 mA)
 △ — (IC = 10 mA)

S22 Parameter vs. Frequency

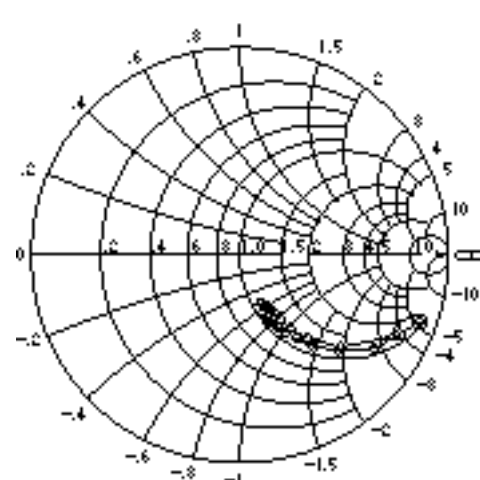


Condition: $V_{CE} = 5\text{ V}$, $Z_0 = 50\ \Omega$
 200 to 2000 MHz (200 MHz step)
 ○ — (IC = 5 mA)
 △ — (IC = 10 mA)

S11 Parameter vs. Frequency

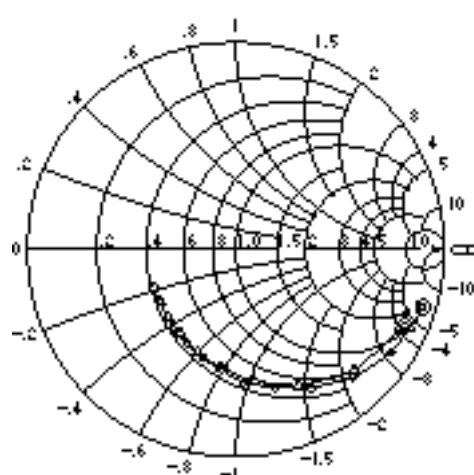


Condition: $V_{CE} = 1 \text{ V}$, $Z_0 = 50 \Omega$
 200 to 2000 MHz (200 MHz step)
 ○ — ($I_C = 1 \text{ mA}$)
 △ — ($I_C = 2 \text{ mA}$)

S21 Parameter vs. Frequency

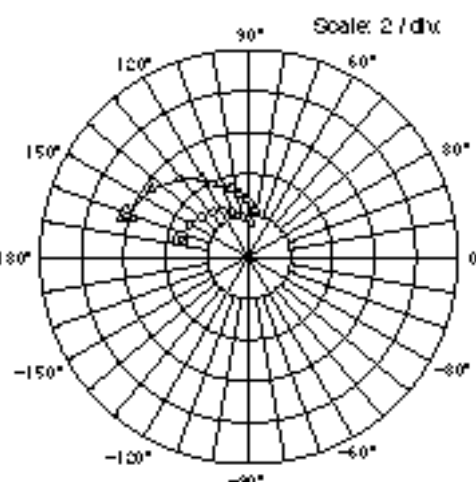


Condition: $V_{CE} = 1 \text{ V}$, $Z_0 = 50 \Omega$
 200 to 2000 MHz (200 MHz step)
 ○ — ($I_C = 1 \text{ mA}$)
 △ — ($I_C = 2 \text{ mA}$)

S12 Parameter vs. Frequency

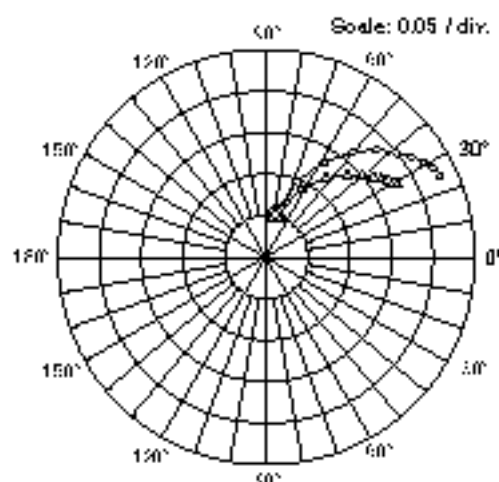

Condition: $V_{CE} = 1 \text{ V}$, $Z_0 = 50 \Omega$
 200 to 2000 MHz (200 MHz step)
 ○ — ($I_C = 1 \text{ mA}$)
 △ — ($I_C = 2 \text{ mA}$)

S22 Parameter vs. Frequency

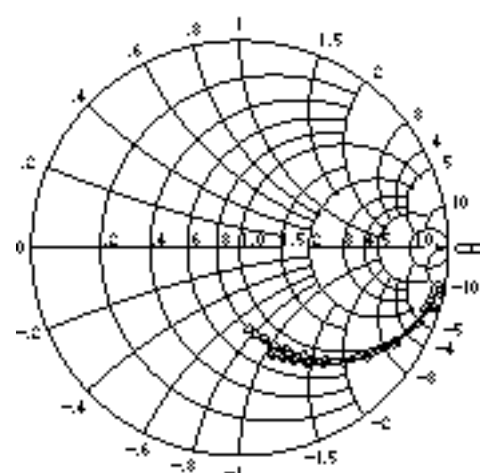

Condition: $V_{CE} = 1 \text{ V}$, $Z_0 = 50 \Omega$
 200 to 2000 MHz (200 MHz step)
 ○ — ($I_C = 1 \text{ mA}$)
 △ — ($I_C = 2 \text{ mA}$)

2SC4994

S Parameters ($V_{CE} = 5\text{ V}$, $I_C = 5\text{ mA}$, $Z_O = 50\text{ }\Omega$)

Freq. (MHz)	S11		S21		S12		S22	
	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.
200	0.794	-33.7	12.47	155.5	0.0338	71.9	0.919	-20.5
400	0.689	-62.1	10.61	136.9	0.0569	58.9	0.786	-34.9
600	0.586	-84.6	8.73	123.2	0.0706	51.5	0.659	-44.4
800	0.511	-103.0	7.31	113.0	0.0795	47.5	0.558	-51.4
1000	0.457	-119.6	6.16	105.0	0.0867	45.6	0.486	-55.8
1200	0.430	-133.7	5.33	98.6	0.0918	44.9	0.432	-59.2
1400	0.401	-146.8	4.67	93.7	0.0975	44.9	0.395	-62.0
1600	0.400	-158.5	4.16	88.9	0.103	45.3	0.364	-64.5
1800	0.394	-167.9	3.77	84.4	0.108	46.0	0.340	-67.0
2000	0.397	-176.9	3.42	80.6	0.113	46.8	0.321	-69.4

S Parameters ($V_{CE} = 5\text{ V}$, $I_C = 10\text{ mA}$, $Z_O = 50\text{ }\Omega$)

Freq. (MHz)	S11		S21		S12		S22	
	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.
200	0.659	-50.5	18.28	146.8	0.0297	66.3	0.850	-27.1
400	0.547	-88.0	13.90	126.0	0.0456	55.4	0.658	-42.4
600	0.478	-113.4	10.66	113.0	0.0549	51.0	0.519	-50.7
800	0.441	-132.4	8.53	104.3	0.0611	50.2	0.430	-54.9
1000	0.419	-148.9	7.00	97.5	0.0680	50.5	0.370	-57.3
1200	0.420	-160.3	5.96	91.9	0.0735	51.9	0.330	-58.9
1400	0.404	-171.6	5.17	87.8	0.0804	53.6	0.303	-60.7
1600	0.413	-179.3	4.59	83.3	0.0875	54.9	0.282	-62.3
1800	0.426	-172.2	4.13	80.1	0.0942	56.3	0.266	-64.4
2000	0.431	-165.2	3.73	76.8	0.101	56.9	0.252	-66.7

S Parameters ($V_{CE} = 1\text{ V}$, $I_C = 1\text{ mA}$, $Z_O = 50\text{ }\Omega$)

Freq. (MHz)	S11		S21		S12		S22	
	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.
200	0.939	-17.2	3.35	165.1	0.0525	78.0	0.978	-11.8
400	0.895	-33.7	3.25	151.8	0.0977	67.7	0.933	-22.5
600	0.834	-47.9	2.79	139.8	0.134	58.4	0.873	-32.0
800	0.761	-61.5	2.77	128.9	0.163	50.6	0.805	-40.8
1000	0.693	-74.3	2.51	119.0	0.185	44.4	0.743	-48.0
1200	0.642	-86.5	2.30	110.5	0.200	38.9	0.687	-54.4
1400	0.582	-97.0	2.08	103.9	0.212	34.7	0.644	-59.5
1600	0.544	-107.2	1.93	97.2	0.220	31.2	0.602	-64.1
1800	0.507	-117.4	1.79	91.0	0.227	28.1	0.568	-68.8
2000	0.489	-127.2	1.66	85.7	0.230	25.0	0.538	-73.5

S Parameters ($V_{CE} = 1\text{ V}$, $I_C = 2\text{ mA}$, $Z_O = 50\text{ }\Omega$)

Freq. (MHz)	S11		S21		S12		S22	
	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.
200	0.889	-24.3	6.20	161.2	0.0508	74.6	0.955	-17.2
400	0.814	-46.0	5.69	145.2	0.0906	62.5	0.871	-31.4
600	0.724	-65.4	4.99	131.7	0.119	52.7	0.773	-42.8
800	0.646	-81.9	4.42	120.8	0.138	45.2	0.678	-52.7
1000	0.572	-97.0	3.85	111.7	0.151	40.4	0.604	-59.2
1200	0.531	-110.2	3.42	104.0	0.160	36.7	0.540	-65.3
1400	0.484	-123.1	3.04	98.2	0.167	34.1	0.494	-70.6
1600	0.463	-134.4	2.75	92.3	0.173	32.2	0.454	-74.9
1800	0.441	-144.5	2.51	87.2	0.177	30.3	0.423	-79.3
2000	0.434	-154.7	2.30	82.6	0.180	29.1	0.396	-83.4

When using this document, keep the following in mind:

1. This document may, wholly or partially, be subject to change without notice.
2. All rights are reserved: No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without Hitachi's permission.
3. Hitachi will not be held responsible for any damage to the user that may result from accidents or any other reasons during operation of the user's unit according to this document.
4. Circuitry and other examples described herein are meant merely to indicate the characteristics and performance of Hitachi's semiconductor products. Hitachi assumes no responsibility for any intellectual property claims or other problems that may result from applications based on the examples described herein.
5. No license is granted by implication or otherwise under any patents or other rights of any third party or Hitachi, Ltd.
6. **MEDICAL APPLICATIONS:** Hitachi's products are not authorized for use in MEDICAL APPLICATIONS without the written consent of the appropriate officer of Hitachi's sales company. Such use includes, but is not limited to, use in life support systems. Buyers of Hitachi's products are requested to notify the relevant Hitachi sales offices when planning to use the products in MEDICAL APPLICATIONS.

HITACHI

Hitachi, Ltd.

Semiconductor & IC Div.

Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100, Japan

Tel: Tokyo (03) 3270-2111

Fax: (03) 3270-5109

For further information write to:

Hitachi America, Ltd.

Semiconductor & IC Div.

2000 Sierra Point Parkway

Brisbane, CA 94005-4835

U.S.A.

Tel: 415-589-8000

Fax: 415-589-4207

Hitachi Europe GmbH

Electronic Components Group

Continental Europe

Danrecher Straße 3

D-85622 Feldkirchen

München

Tel: 089-9 94 80-0

Fax: 089-9 29 30 00

Hitachi Europe Ltd.

Electronic Components Div.

Northern Europe Headquarters

Whitebrook Park

Lower Cookham Road

Maidenhead

Berkshire SL6 8YA

United Kingdom

Tel: 0628-585000

Fax: 0628-778322

Hitachi Asia Pte. Ltd.

45 Collyer Quay #20-00

Hitachi Tower

Singapore 0404

Tel: 535-2100

Fax: 535-1533

Hitachi Asia (Hong Kong) Ltd.

Unit 705, North Tower,

World Finance Centre

Harbour City, Canton Road

Tsim Sha Tsui, Kowloon

Hong Kong

Tel: 27359218

Fax: 27306074