

ASSP Mobile Communication Systems

Piezoelectric SAW BPF (700 MHz to 1000 MHz)

F5CE Series (D2 type)

■ DESCRIPTION


The F5CE-D2 series of SAW bandpass filters apply to the frequency range 700 MHz to 1000 MHz. These filters make it possible to provide high stop-band attenuation and excellent pass-band flatness due to using unique DMS (Double Mode SAW) technology as design method. Moreover, these filters are provided in small 3.0 mm sq. package. This contributes to reduce weight and size of mobile communication units.

The F5CE-D2 series of SAW filters are suitable for interstage RF filter in mobile communication systems in the frequency range 700 MHz to 1000 MHz. Standard devices are available for AMPS/CDMA/TDMA, GSM, PDC800 and ISM900.

■ FEATURES


- Excellent stop-band attenuation
- Low insertion loss and low pass-band ripple
- Ultra compact and light package (3.0 mm sq.)
- External matching circuits are not required. (50 Ω I/O)
- Surface mount package (SMT)
- Standard devices are available for mobile communication standards (AMPS/CDMA/TDMA, GSM, PDC800 and ISM900)

■ PACKAGE



F5CE Series (D2 type)

■ PIN ASSIGNMENT

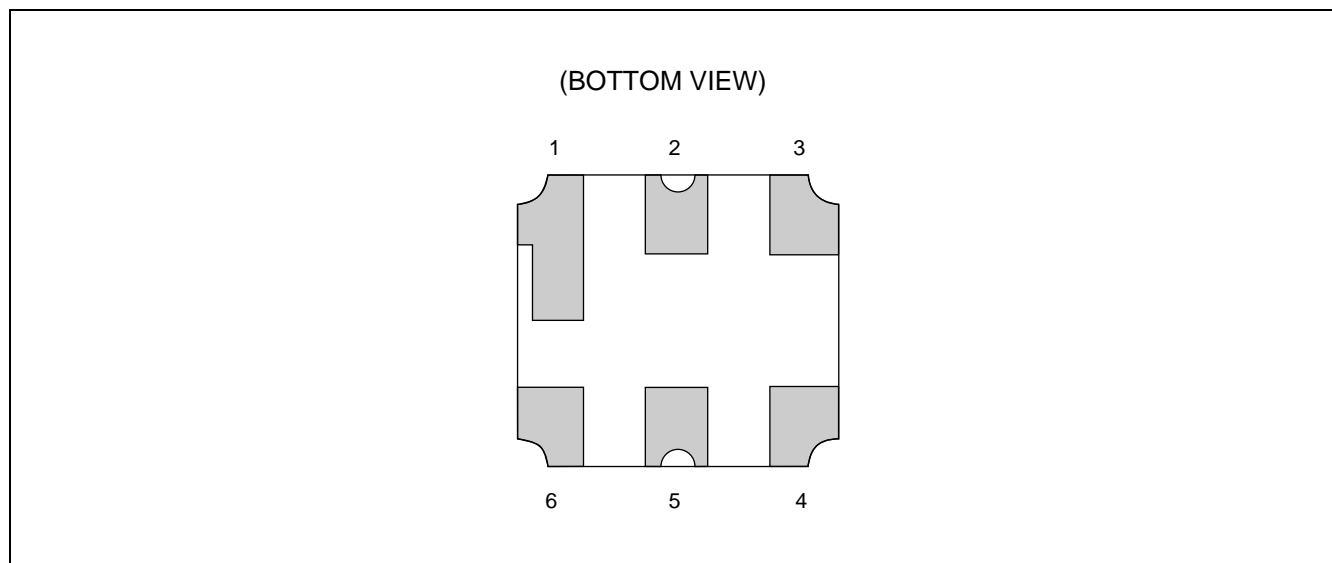

■ PIN DESCRIPTION

Pin no.	Pin name	Description
1	GND	Ground Pin
2	IN	Input Pin
3	GND	Ground Pin
4	GND	Ground Pin
5	OUT	Output Pin
6	GND	Ground Pin

■ ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Rating		Unit
		Min	Max	
Operating temperature	Ta	−30	+85	°C
Storage temperature	Tstg	−40	+100	°C
Input power	P _{IN}	—	+15	dBm
Input DC voltage	—	−5	+5	V

WARNING: Piezoelectric devices can be permanently damaged by application of stress (voltage, current, temperature, etc.) in excess of absolute maximum ratings. Do not exceed these ratings.

F5CE Series (D2 type)

■ RECOMMENDED OPERATING CONDITION

Parameter	Symbol	Value		Unit
		Min	Max	
Operating temperature	Ta	−30	+85	°C

WARNING: The recommended operating conditions are required in order to ensure the normal operation of the piezoelectric device. All of the device's electrical characteristics are warranted when the device is operated within these ranges.

Always use piezoelectric devices within their recommended operating condition ranges. Operation outside these ranges may adversely affect reliability and could result in device failure.

No warranty is made with respect to uses, operating conditions, or combinations not represented on the data sheet. Users considering application outside the listed conditions are advised to contact their FUJITSU representatives beforehand.

■ STANDARD DEVICES

System		Center frequency (MHz)	Band width (MHz)	Part symbol	Part number	Remarks
AMPS/CDMA/TDMA	Tx	836.5	25	32	FAR-F5CE-836M50-D232	
	Rx	881.5	25	33	FAR-F5CE-881M50-D233	
GSM	Tx	902.5	25	34	FAR-F5CE-902M50-D234	
	Rx	947.5	25	35	FAR-F5CE-947M50-D235	
ISM900	—	915.0	7	38	FAR-F5CE-915M00-D238	
	—	915.0	26	36	FAR-F5CE-915M00-D236	

F5CE Series (D2 type)


■ ELECTRICAL CHARACTERISTICS AND TYPICAL FREQUENCY RESPONSE

1. AMPS/CDMA/TDMA (Tx)

Part number : FAR-F5CE-836M50-D232


(Ta = -30 °C to +85 °C)

Parameter	Conditions	Value			Unit	Remarks
		Min	Typ	Max		
Insertion loss	824 to 849 MHz	—	2.7	3.5	dB	
Pass-band ripple	824 to 849 MHz	—	0.9	1.6	dB	
Absolute stop-band attenuation	DC to 800 MHz	50	66	—	dB	
	869 to 1049 MHz	28	33	—	dB	
	1049 to 1200 MHz	50	60	—	dB	
	1200 to 2000 MHz	45	50	—	dB	
Pass-band VSWR (Return loss)	824 to 849 MHz	— (9.5)	1.8 (10.9)	2.0 —	— (dB)	

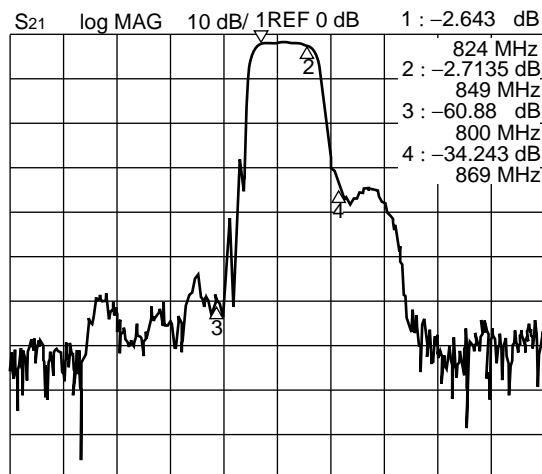


CENTER 835 MHz

SPAN 300 MHz

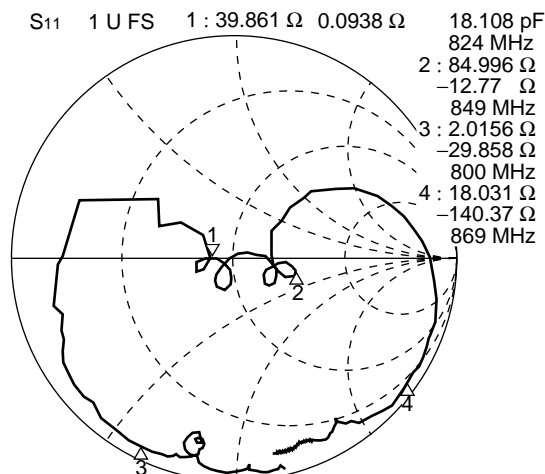


CENTER 835 MHz

SPAN 300 MHz

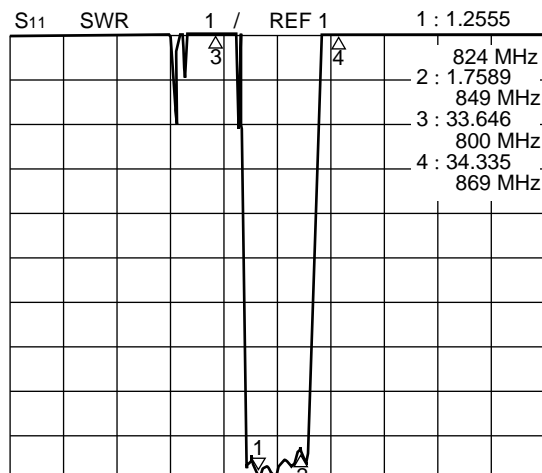

CENTER 835 MHz

SPAN 300 MHz

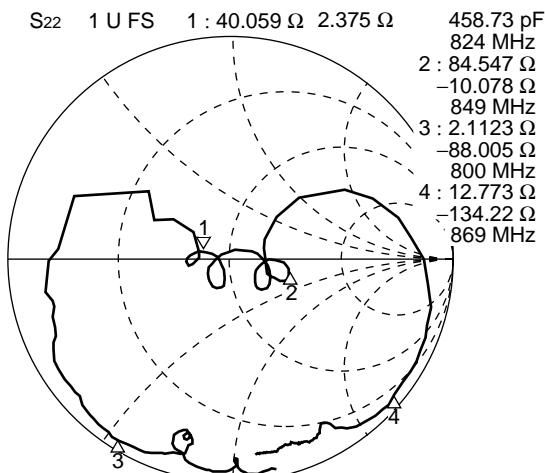

CENTER 835 MHz

SPAN 300 MHz


F5CE Series (D2 type)

2. AMPS/CDMA/TDMA (Rx)

Part number : FAR-F5CE-881M50-D233


(Ta = -30 °C to +85 °C)

Parameter	Conditions	Value			Unit	Remarks
		Min	Typ	Max		
Insertion loss	869 to 894 MHz	—	2.7	3.5	dB	
Pass-band ripple	869 to 894 MHz	—	0.9	1.6	dB	
Absolute stop-band attenuation	DC to 779 MHz	50	63	—	dB	
	779 to 849 MHz	45	50	—	dB	
	914 to 970 MHz	28	33	—	dB	
	970 to 1049 MHz	50	60	—	dB	
	1049 to 2000 MHz	40	50	—	dB	
Pass-band VSWR (Return loss)	869 to 894 MHz	— (9.5)	1.7 (11.7)	2.0 —	— (dB)	

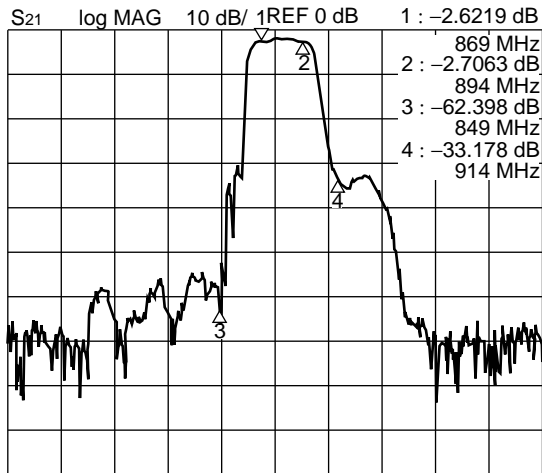


CENTER 880 MHz

SPAN 300 MHz

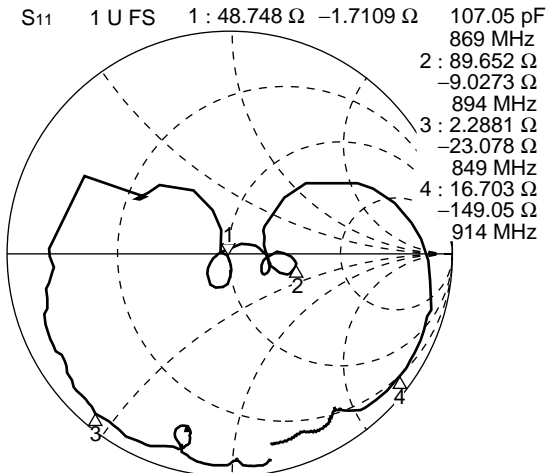


CENTER 880 MHz

SPAN 300 MHz

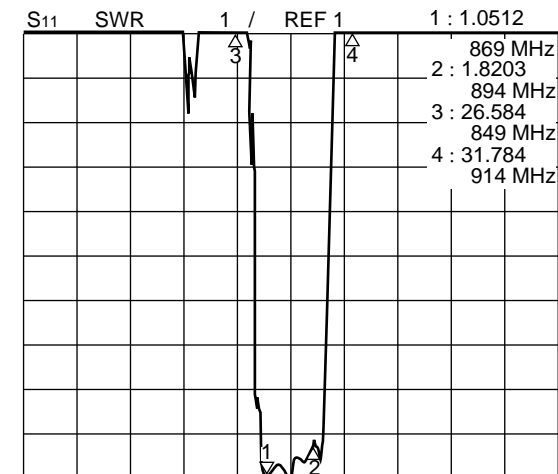

CENTER 880 MHz

SPAN 300 MHz

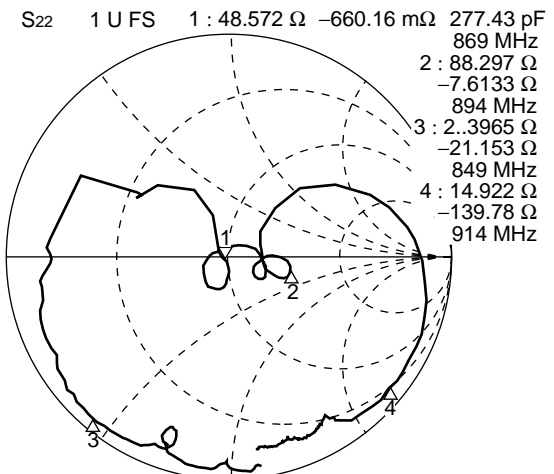

CENTER 880 MHz

SPAN 300 MHz


F5CE Series (D2 type)

3. GSM (Tx)

Part number : FAR-F5CE-902M50-D234


(Ta = -30 °C to +85 °C)

Parameter	Conditions	Value			Unit	Remarks
		Min	Typ	Max		
Insertion loss	890 to 915 MHz	—	2.8	3.3	dB	
Pass-band ripple	890 to 915 MHz	—	0.8	1.4	dB	
Absolute stop-band attenuation	DC to 845 MHz	50	60	—	dB	
	845 to 870 MHz	45	50	—	dB	
	925 to 935 MHz	5	18	—	dB	
	935 to 980 MHz	28	33	—	dB	
	980 to 1200 MHz	50	60	—	dB	
	1200 to 3000 MHz	30	40	—	dB	
Pass-band VSWR (Return loss)	890 to 915 MHz	— (9.0)	1.7 (11.7)	2.1 —	— (dB)	

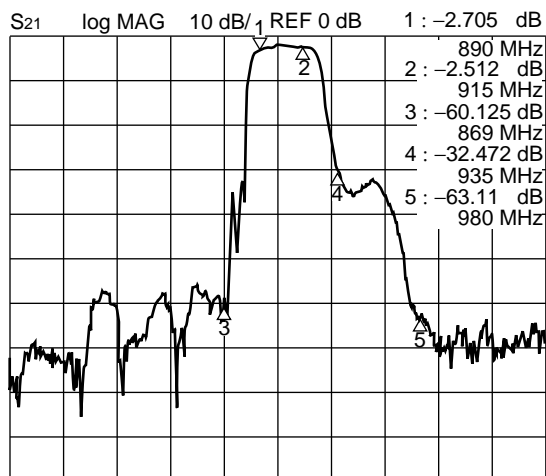


CENTER 900 MHz

SPAN 300 MHz

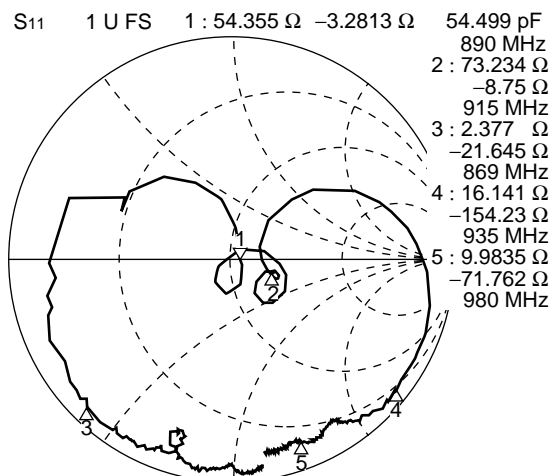


CENTER 900 MHz

SPAN 300 MHz

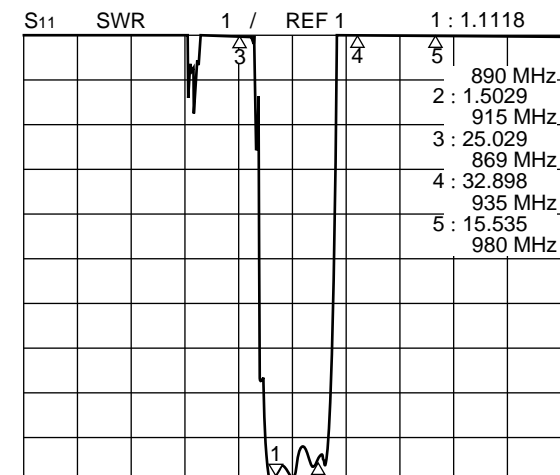

CENTER 900 MHz

SPAN 300 MHz

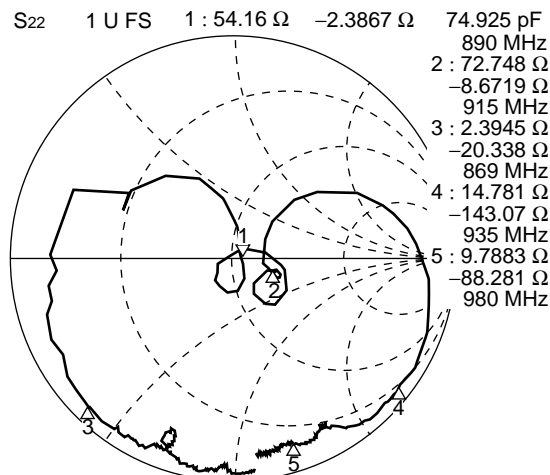

CENTER 900 MHz

SPAN 300 MHz


F5CE Series (D2 type)

4. GSM (Rx)

Part number : FAR-F5CE-947M50-D235


(Ta = -30 °C to +85 °C)

Parameter	Conditions	Value			Unit	Remarks
		Min	Typ	Max		
Insertion loss	935 to 960 MHz	—	2.7	3.3	dB	
Pass-band ripple	935 to 960 MHz	—	0.7	1.4	dB	
Absolute stop-band attenuation	DC to 871 MHz	50	66	—	dB	
	890 to 915 MHz	30	40	—	dB	
	980 to 1025 MHz	25	34	—	dB	
	1025 to 2000 MHz	45	48	—	dB	
	2000 to 3000 MHz	30	33	—	dB	
Pass-band VSWR (Return loss)	935 to 960 MHz	— (9.0)	1.9 (10.2)	2.1 —	— (dB)	

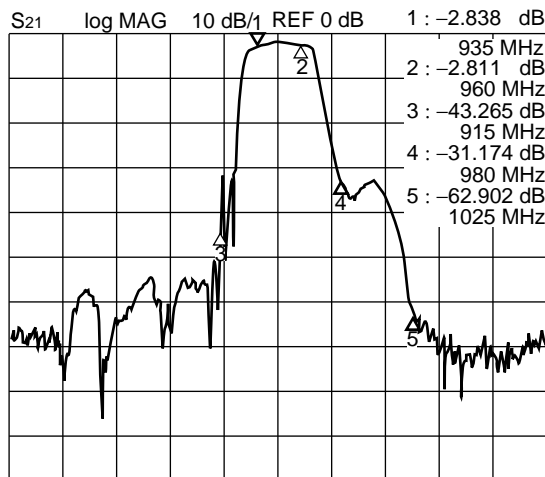


CENTER 950 MHz

SPAN 300 MHz

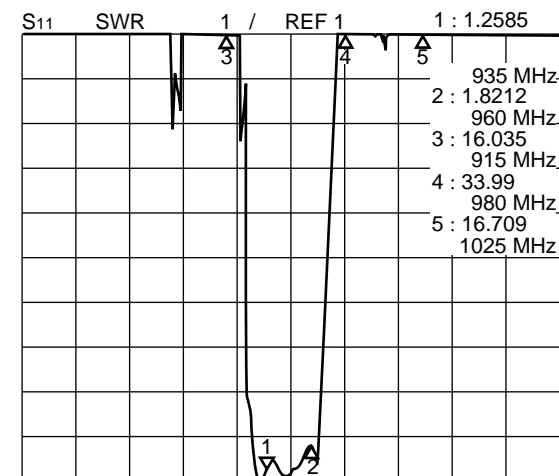


CENTER 950 MHz

SPAN 300 MHz

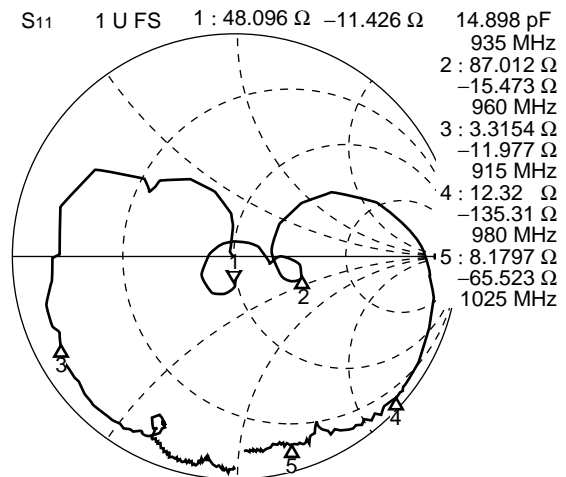

CENTER 950 MHz

SPAN 300 MHz

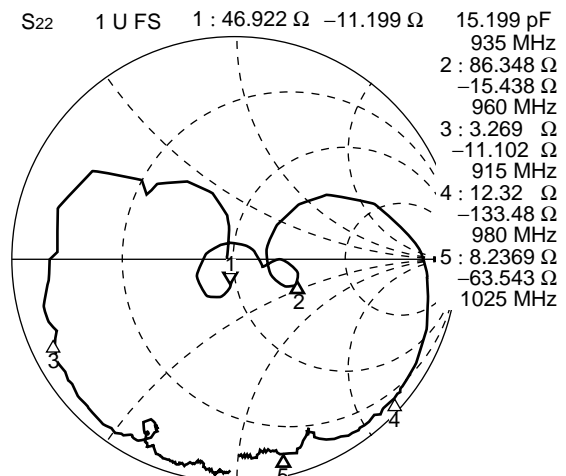

CENTER 950 MHz

SPAN 300 MHz





F5CE Series (D2 type)

5. ISM900 (7 MHz Bandwidth)

Part number : FAR-F5CE-915M00-D238

(Ta = -30 °C to +85 °C)

Parameter	Conditions	Value			Unit	Remarks
		Min	Typ	Max		
Insertion loss	911.5 to 918.5 MHz	—	3.2	3.5	dB	
Pass-band ripple	911.5 to 918.5 MHz	—	0.3	1.0	dB	
Absolute stop-band attenuation	DC to 600 MHz	50	66	—	dB	
	600 to 840 MHz	40	35	—	dB	
	869 to 894 MHz	35	40	—	dB	
	970 to 1500 MHz	40	45	—	dB	
	1500 to 3000 MHz	25	28	—	dB	
Pass-band VSWR (Return loss)	911.5 to 918.5 MHz	— (9.5)	1.8 (10.9)	2.0 —	— (dB)	

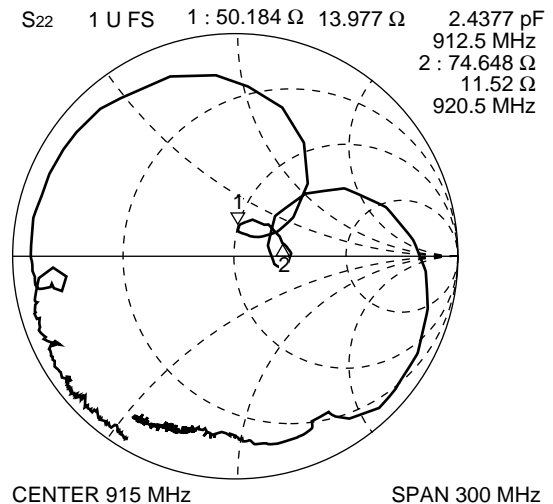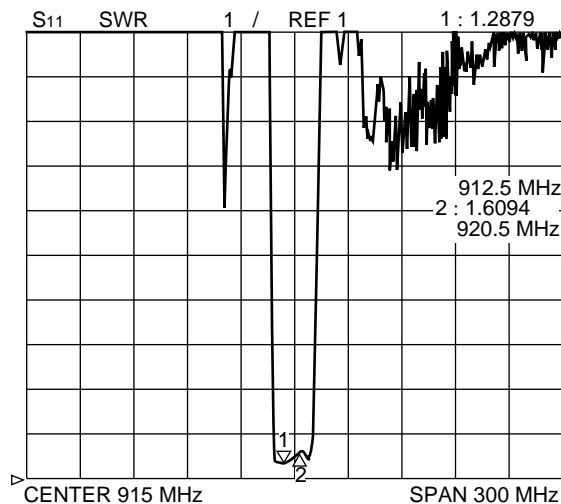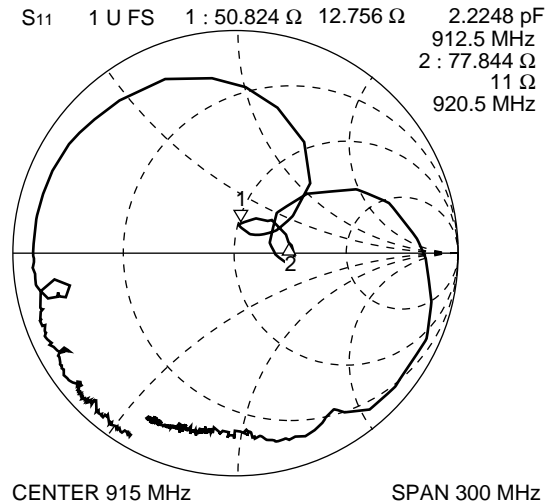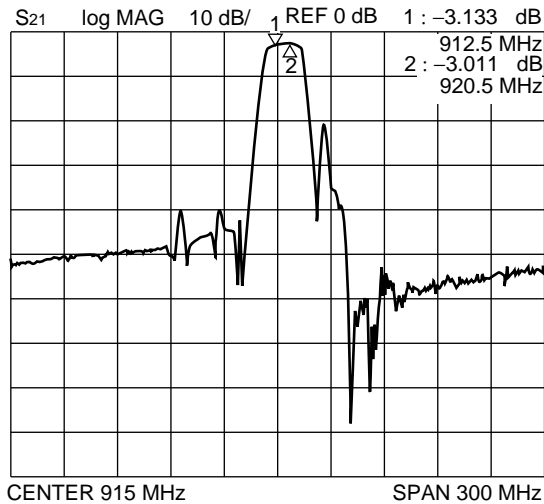





F5CE Series (D2 type)

6. ISM900 (26 MHz Bandwidth)

Part number : FAR-F5CE-915M00-D236


(Ta = -30 °C to +85 °C)

Parameter	Conditions	Value			Unit	Remarks
		Min	Typ	Max		
Insertion loss	902 to 928 MHz	—	2.6	3.5	dB	
Pass-band ripple	902 to 928 MHz	—	0.9	2.0	dB	
Absolute stop-band attenuation	DC to 800 MHz	50	70	—	dB	
	800 to 880 MHz	45	57	—	dB	
	950 to 1080 MHz	28	31	—	dB	
	1080 to 2000 MHz	45	60	—	dB	
	2000 to 3000 MHz	25	38	—	dB	
Pass-band VSWR (Return loss)	902 to 928 MHz	— (8.1)	1.7 (11.7)	2.3 —	— (dB)	

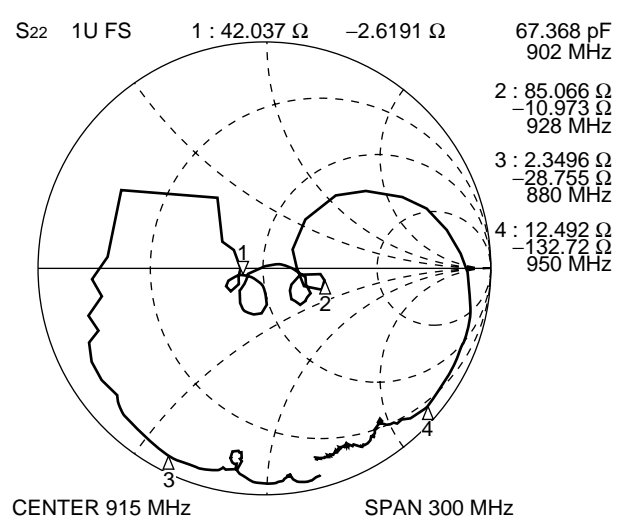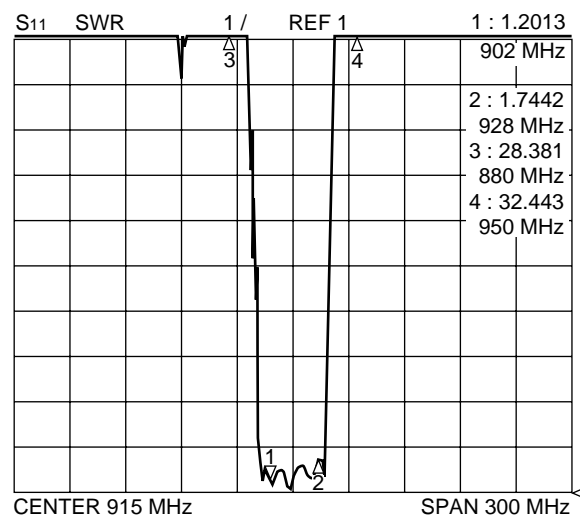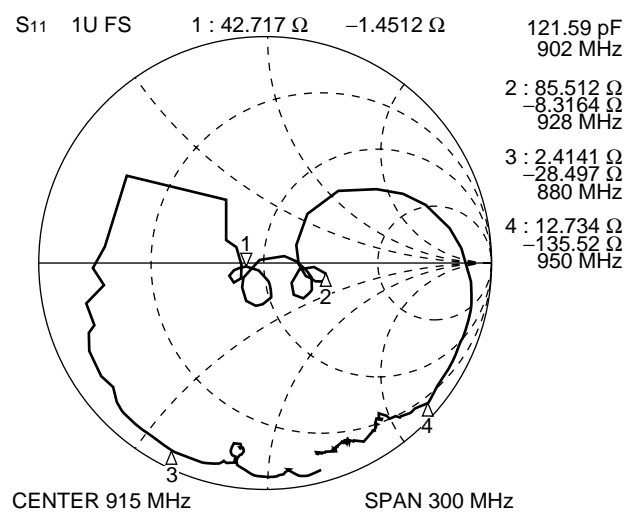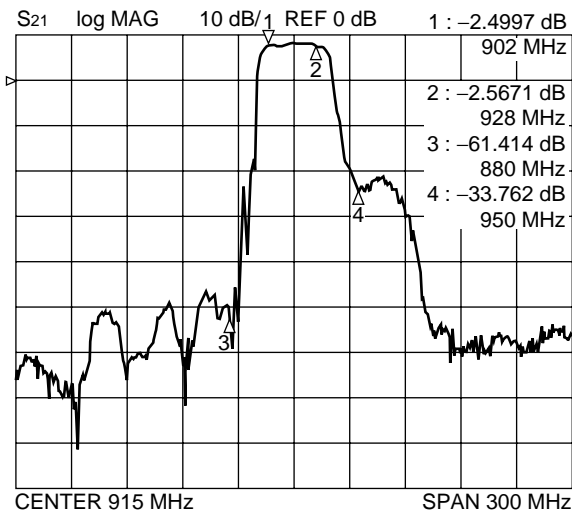

F5CE Series (D2 type)

■ MEASURING CIRCUIT

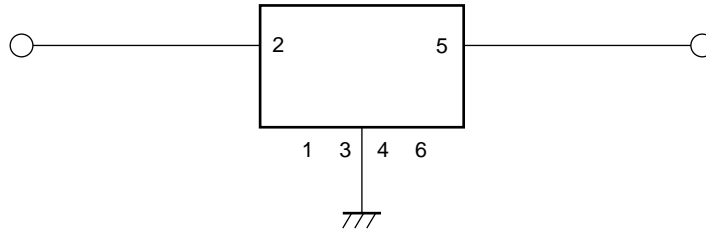

1 to 6 : Pin numbers


■ PART NUMBER DESIGNATION

[Designation example]

FAR-F5CE-□□□M□□-D2□□-□
(1) (2) (3)


- (1) Frequency designation : Specify the nominal frequency in six alphanumeric characters.
Enter M (for MHz) at the decimal point.
Refer to "■STANDARD DEVICES".
[Example] 836.5 MHz → 836M50
- (2) Serial number : Specify a characters from 01 to 99.
Refer to "■STANDARD DEVICES".
- (3) Packing (Reeled tape) : Y : 1 k pcs/reel
X : 5 k pcs/reel

■ MARKING

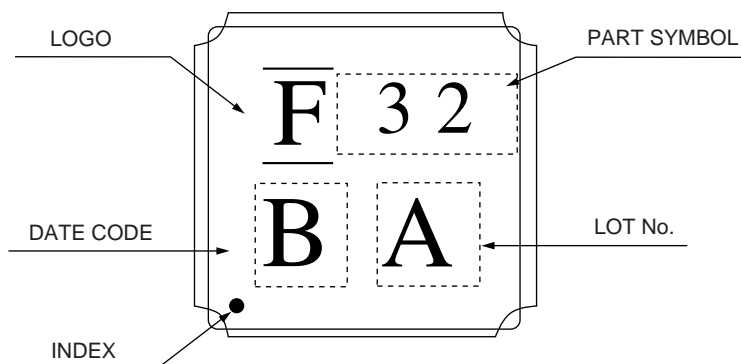

F5CE Series (D2 type)


■ PACKAGE DIMENSION

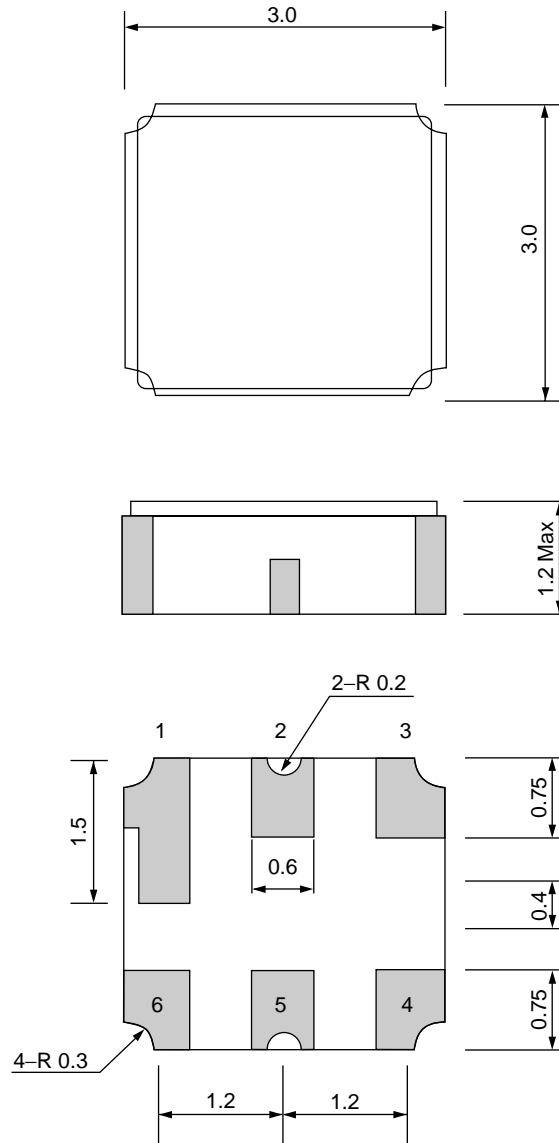

Dimensions in mm.

F5CE Series (D2 type)

■ RECOMMENDED LAND PATTERN

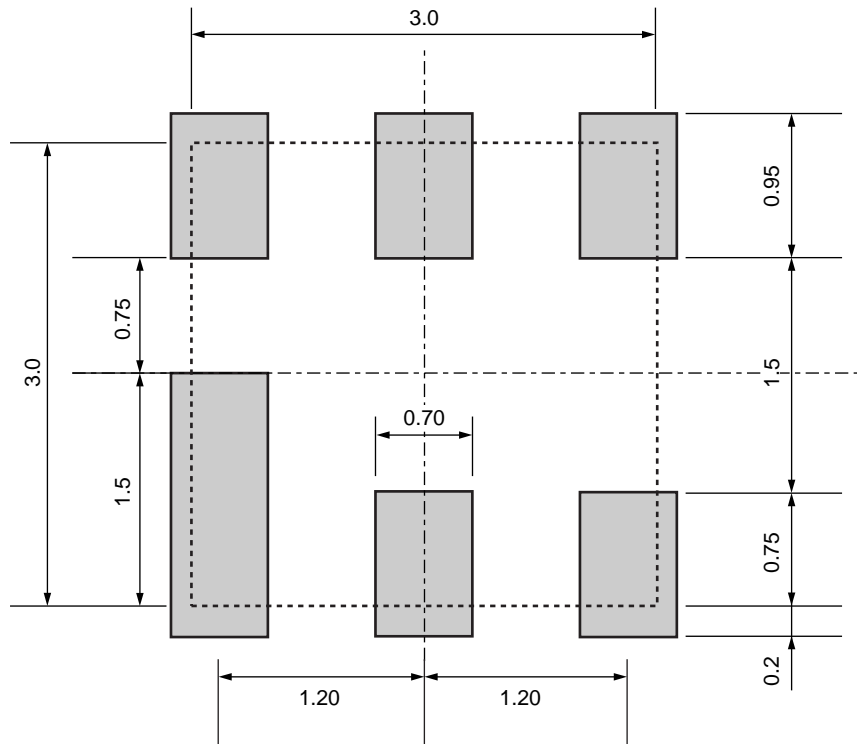


Dimensions in mm.


F5CE Series (D2 type)

■ PACKING

1. Reel Dimensions

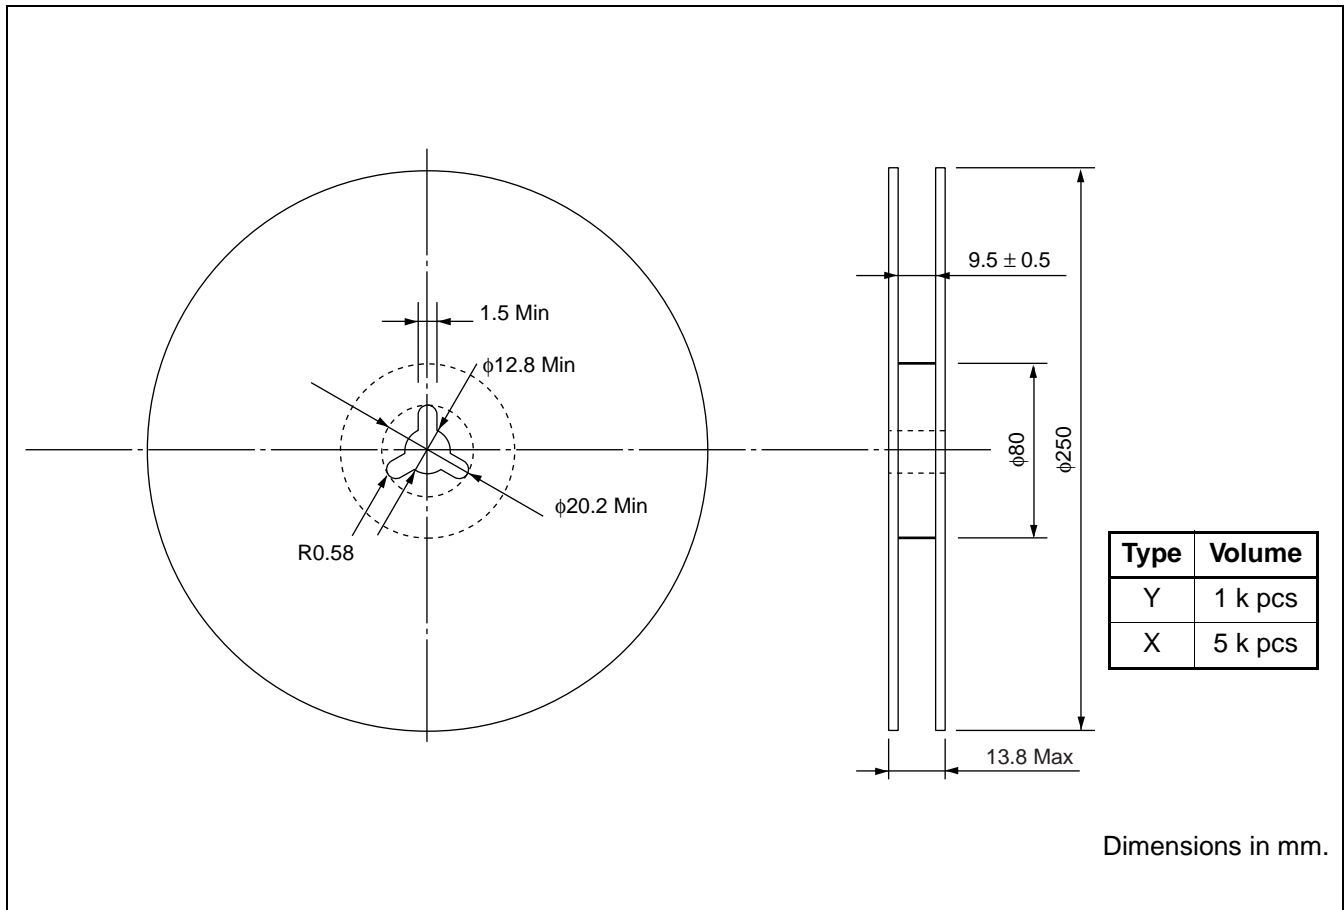


2. Packing Style

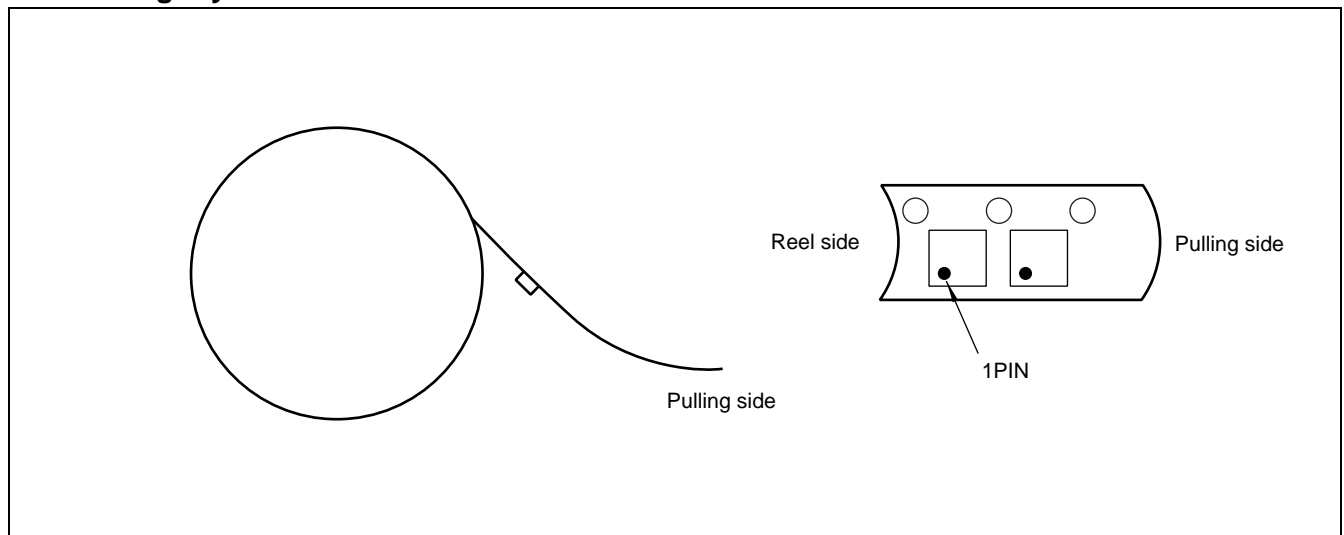

F5CE Series (D2 type)

■ RECOMMENDED REFLOW PROFILE

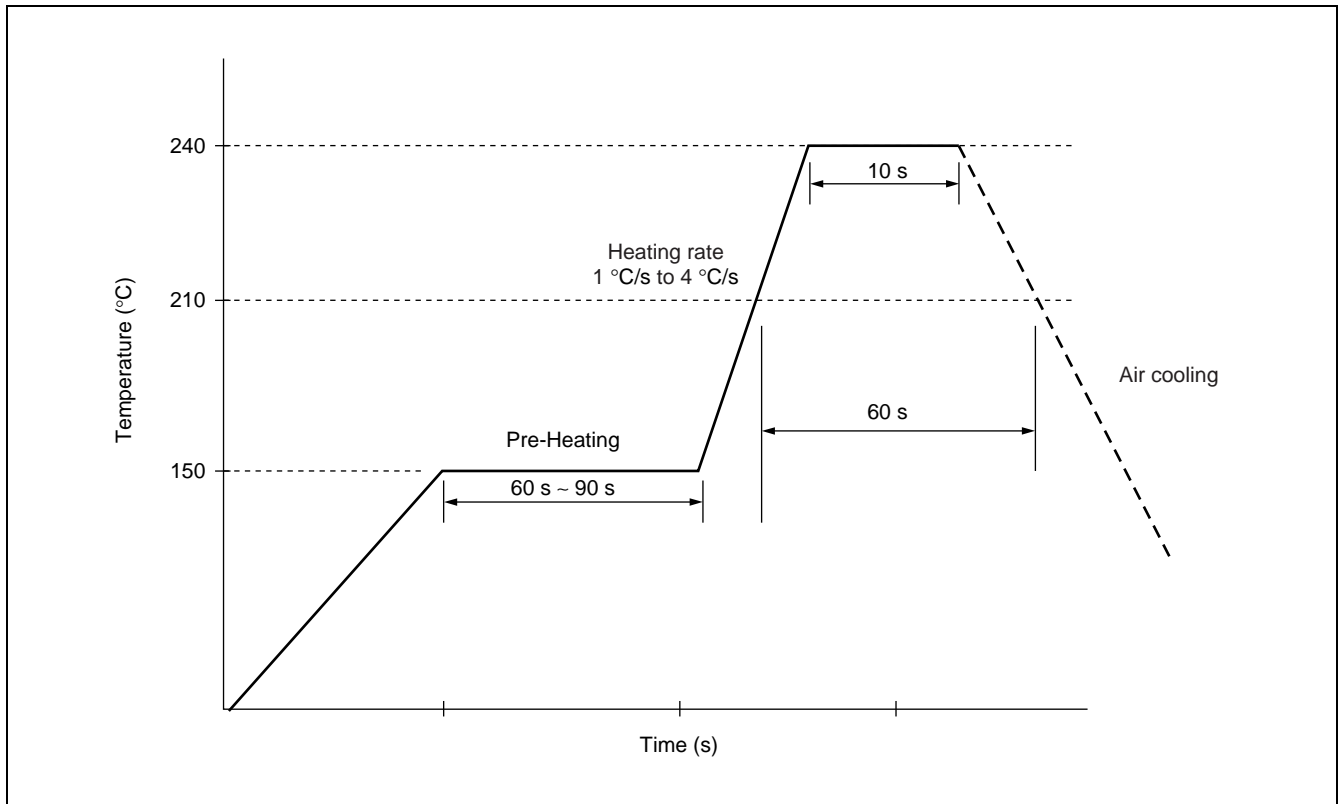

■ NOTE

A mass-produced product order is accepted by a unit of 1000.

F5CE Series (D2 type)

FUJITSU MEDIA DEVICES LIMITED

All Rights Reserved.

The contents of this document are subject to change without notice. Customers are advised to consult with FUJITSU MEDIA DEVICES sales representatives before ordering.

The information, such as descriptions of function and application circuit examples, in this document are presented solely for the purpose of reference to show examples of operations and uses of FUJITSU MEDIA DEVICES electronic device; FUJITSU MEDIA DEVICES does not warrant proper operation of the device with respect to use based on such information. When you develop equipment incorporating the device based on such information, you must assume any responsibility arising out of such use of the information. FUJITSU MEDIA DEVICES assumes no liability for any damages whatsoever arising out of the use of the information. Any information in this document, including descriptions of function and schematic diagrams, shall not be construed as license of the use or exercise of any intellectual property right, such as patent right or copyright, or any other right of FUJITSU MEDIA DEVICES or any third party or does FUJITSU MEDIA DEVICES warrant non-infringement of any third-party's intellectual property right or other right by using such information. FUJITSU MEDIA DEVICES assumes no liability for any infringement of the intellectual property rights or other rights of third parties which would result from the use of information contained herein.

The products described in this document are designed, and manufactured as contemplated for general use, including without limitation, ordinary industrial use, general office use, personal use, and household use, but are not designed, developed and manufactured as contemplated (1) for use accompanying fatal risks or dangers that, unless extremely high safety is secured, could have a serious effect to the public, and could lead directly to death, personal injury, severe physical damage or other loss (i.e., nuclear reaction control in nuclear facility, aircraft flight control, air traffic control, mass transport control, medical life support system, missile launch control in weapon system), or (2) for use requiring extremely high reliability (i.e., submersible repeater and artificial satellite).

Please note that FUJITSU MEDIA DEVICES will not be liable against you and/or any third party for any claims or damages arising in connection with above-mentioned uses of the products.

Any electronic devices have inherently a certain rate of failure. You must protect against injury, damage or loss from such failures by incorporating safety design measures into your facility and equipment such as redundancy, fire protection, and prevention of over-current levels and other abnormal operating conditions.

If any products described in this document represent goods or technologies subject to certain restrictions on export under the Foreign Exchange and Foreign Trade Control Law of Japan, the prior authorization by Japanese government should be required for export of those products from Japan.