

CMOS 8-Bit Microcontroller

TMP87CM45N


The 87CM45 is the high-speed and high performance 8-bit single chip microcomputer. This MCU contain CPU core, ROM, RAM, input / output ports, six multi-function timer / counters, serial bus interface, PWM outputs, 8-bit A/D converter, remote control signal preprocessor, and two clock generators on a chip.

Part No.	ROM	RAM	Package	OTP
TMP87CM45N	32 Kbytes	1 Kbytes	P-SDIP64-600-1.78	TMP87PS39N

Features

- ◆ 8-bit single chip microcomputer TLCS-870 Series
- ◆ Instruction execution time: 0.5 μ s (at 8 MHz), 122 μ s (at 32.768 kHz)
- ◆ Basic instructions
 - Multiplication and Division (8-bits $\times$ 8-bits, 16-bits $\div$ 8-bits)
 - Bit manipulations (Set / Clear / Complement / Move / Test / Exclusive or)
 - 16-bit data operations
 - 1-byte jump / subroutine-call (Short relative jump / Vector call)
- ◆ 14 interrupt sources (External: 6, Internal: 8)
 - All sources have independent latches each, and nested interrupt control is available.
 - 4 edge-selectable external interrupts with noise reject
 - High-speed task switching by register bank changeover
- ◆ 8 Input / Output ports (55 pins)
 - High current output: 4 pins (typ. 20 mA)
- ◆ Two 16-bit Timer / Counters
 - Timer, Event counter, Programmable pulse generator output, Pulse width measurement, External trigger timer, Window modes
- ◆ Two 8-bit Timer / Counters
 - Timer, Event counter, Capture (Pulse width / duty measurement) modes
- ◆ Time Base Timer (Interrupt frequency: 1 Hz to 16 kHz)
- ◆ Divider output function (frequency: 1 kHz to 8 kHz)
- ◆ Watchdog Timer
 - Interrupt source / reset output (programmable)
- ◆ Serial Bus Interface
 - I²C-bus, 8-bit SIO modes
 - Selectable two I/O channels
- ◆ D/A conversion (Pulse Width Modulation) outputs
 - 14-bit resolution (1 channel)
 - 7-bit resolution (9 channels)

P-SDIP64-600-1.78



TMP87CM45N

980910EBP1

- For a discussion of how the reliability of microcontrollers can be predicted, please refer to Section 1.3 of the chapter entitled Quality and Reliability Assurance / Handling Precautions.
- TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.




Purchase of TOSHIBA I²C components conveys a license under the Philips I²C Patent Rights to use these components in an I²C system, provided that the system conforms to the I²C Standard Specification as defined by Philips.


- ◆ 8-bit successive approximate type A/D converter with sample and hold
 - 8 analog inputs
 - Conversion time: 23 μ s at 8 MHz
- ◆ Remote control signal preprocessor
- ◆ Dual clock operation
 - Single / Dual-clock mode (option)
- ◆ Five Power saving operating modes
 - STOP mode: Oscillation stops. Battery / Capacitor back-up. Port output hold / high-impedance.
 - SLOW mode: Low power consumption operation using low-frequency clock (32.768 kHz).
 - IDLE1 mode: CPU stops, and Peripherals operate using high-frequency clock. Release by interrupts.
 - IDLE2 mode: CPU stops, and Peripherals operate using high and low frequency clock.
Release by interrupts.
 - SLEEP mode: CPU stops, and Peripherals operate using low-frequency clock. Release by interrupts.
- ◆ Wide operating voltage: 2.7 to 5.5 V at 32.768 kHz, 4.5 to 5.5 V at 8 MHz
- ◆ Emulation Pod: BM87CS39N0A

Pin Assignments (Top View)

P-SDIP64-600-1.78

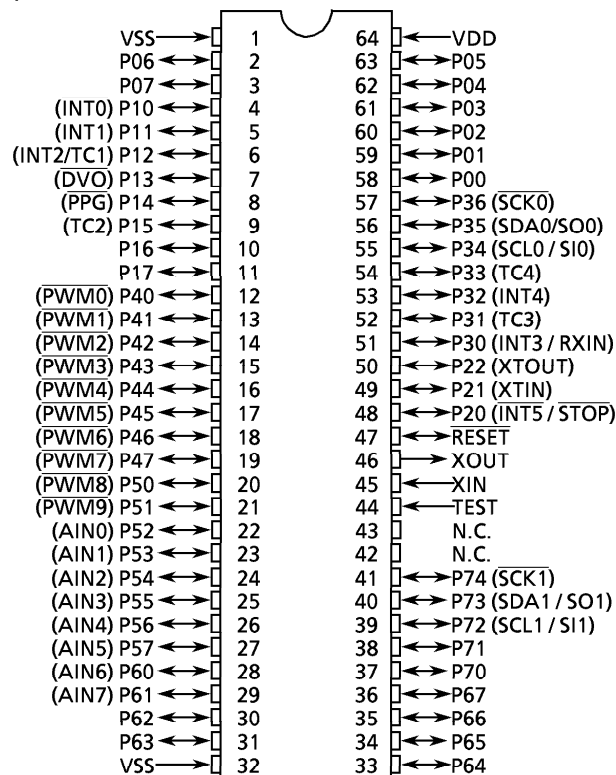

Block Diagram

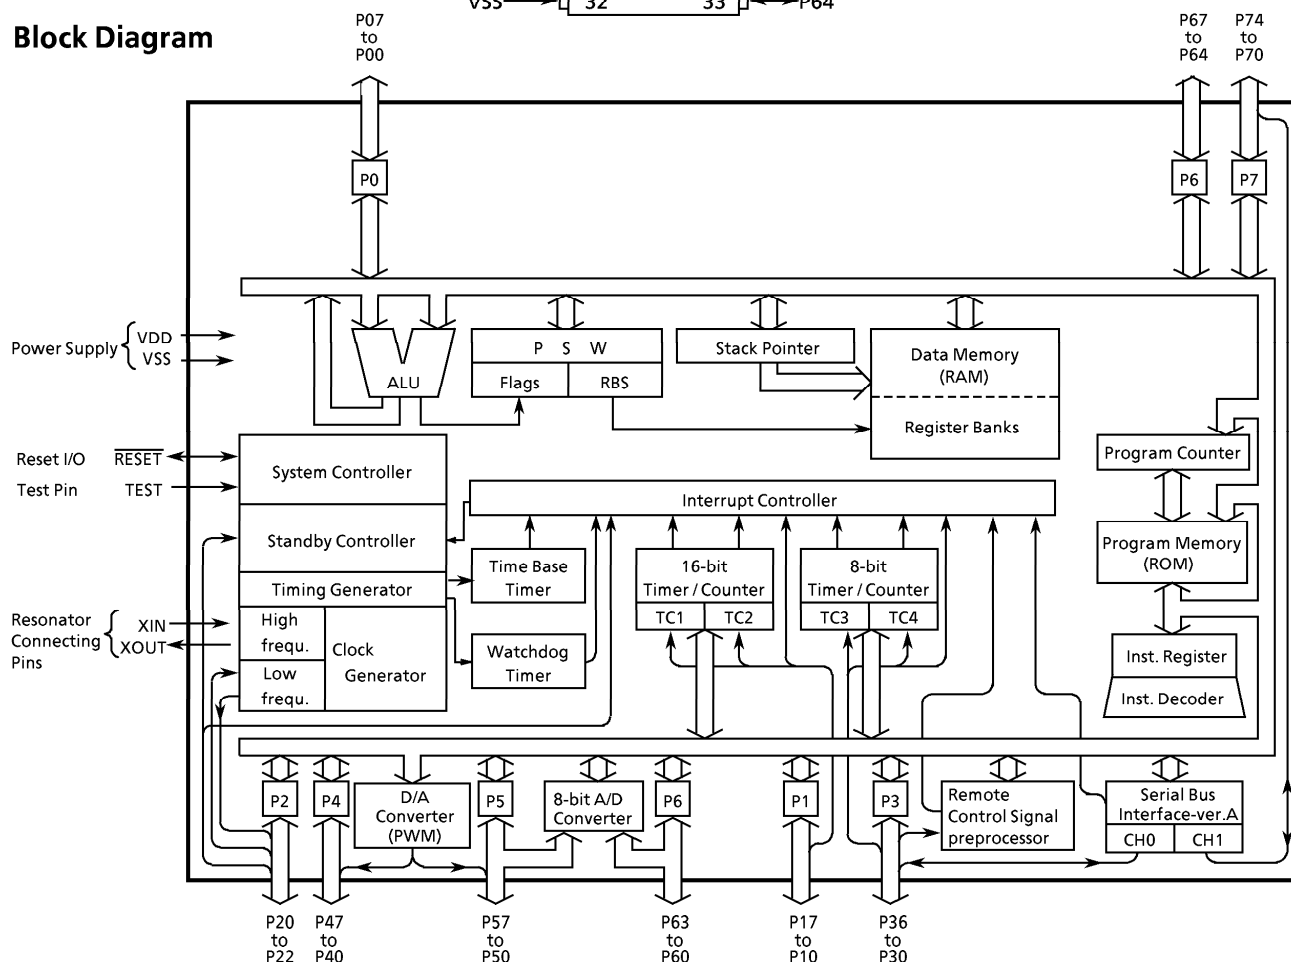

Pin Function

Pin Name	Input/Output	Function	
P07 to P00	I/O	Two 8-bit programmable input / output ports (tri-state). Each bit of these ports can be individually configured as an input or an output under software control. During reset, all bits are configured as inputs. When used as a divider output or a PPG output, the latch must be set to "1".	
P17, P16	I/O		
P15 (TC2)	I/O (Input)		Timer / Counter 2 input
P14 (PPG)	I/O (Output)		Programmable pulse generator output
P13 (DVO)			Divider output
P12 (INT2 / TC1)	I/O (Input)		External interrupt input 2 or Timer / Counter 1 input
P11 (INT1)			External interrupt input 1
P10 (INT0)			External interrupt input 0
P22 (XTOUT)	I/O (Output)	3-bit input/output port with latch. When used as an input port, the latch must be set to "1".	Resonator connecting pins (32.768 kHz). For inputting external clock, XTIN is used and XTOUT is opened.
P21 (XTIN)	I/O (Input)		External interrupt input 5 or STOP mode release signal input
P20 (INT5 / STOP)			
P36 (SCK0)	I/O (I/O)	7-bit input / output port with latch. When used as an input port, a serial bus interface input / output, a timer / counter input, a remote control signal preprocessor input, or an external interrupt input, the latch must be set to "1".	SIO serial clock input / output 0
P35 (SDA0 / SO0)	I/O (I/O / Output)		I ² C bus serial data input / output or SIO serial data output 0
P34 (SCL0 / SI0)	I/O (I/O / Input)		I ² C bus serial clock input / output or SIO serial data input 0
P33 (TC4)	I/O (Input)		Timer / Counter 4 input
P32 (INT4)			External interrupt input 4
P31 (TC3)			Timer / Counter 3 input
P30 (INT3 / RXIN)			External interrupt input 3 or remote control signal preprocessor input
P47 (PWM7) to P41 (PWM1)	I/O (Output)	8-bit programable input / output port (tri-state). Each bit of this port can be individually configured as an input or an output under software control. During reset, all bits are configured as inputs. When used as a PWM output, the latch must be set to "1".	7-bit D/A conversion (PWM) outputs
P40 (PWM0)			14-bit D/A conversion (PWM) output
P57 (AIN5) to P52 (AIN0)	I/O (Input)	8-bit programable input / output port (tri - state). Each bit of this ports can be individually configured as an input or an output under software control. When used as an input port, analog input, or a PWM output, the latch must be set to "1".	A/D converter analog inputs
P51 (PWM9)	I/O (Output)		7-bit D/A conversion (PWM) outputs
P50 (PWM8)			

Pin Name	Input/Output	Function	
P67 to P64	I/O	8-bit programable input / output port. (P67 to 64: tri-State, P63 to 60: High current output). Each bit of this ports can be individually configured as an input or an output under software control. During reset, all bits are configured as inputs.	High current outputs
P63			
P62			
P61 (AIN7)			
P60 (AIN6)	I/O (Input)		A/D converter analog inputs
P74 (SCK1)	I/O (I/O)	5-bit input / output port with latch. When used as an input port, or a serial bus interface input / output, the latch must be set to "1".	SIO serial clock input / output 1
P73 (SDA1 / SO1)	I/O (I/O / Output)		I ² Cbus serial data input / output or SIO serial data output 1
P72 (SCL1 / SI1)	I/O (I/O / Input)		I ² Cbus serial clock data input / output or SIO serial data input 1
P71	I/O		
P70			
XIN, XOUT	Input, Output	Resonator connecting pins. For inputting external clock, XIN is used and XOUT is opened.	
RESET	I/O	Reset signal input or watchdog timer output / address-trap- reset output / system-clock- reset output.	
TEST	Input	Test pin for out-going test. Be tied to low.	
VDD, VSS	Power Supply	+ 5 V, 0 V (GND)	



Operational Description

1. CPU Core Functions

The CPU core consists of a CPU, a system clock controller, an interrupt controller, and a watchdog timer. This section provides a description of the CPU core, the program memory (ROM), the data memory (RAM), and the reset circuit.

1.1 Memory Address Map

The TLC8-870 Series is capable of addressing 64K bytes of memory. Figure 1-1 shows the memory address maps of the 87CM45. In the TLC8-870 Series, the memory is organized 4 address spaces (ROM, RAM, SFR, and DBR). It uses a memory mapped I/O system, and all I/O registers are mapped in the SFR / DBR address spaces. There are 16 banks of general-purpose registers. The register banks are also assigned to the first 128 bytes of the RAM address space.

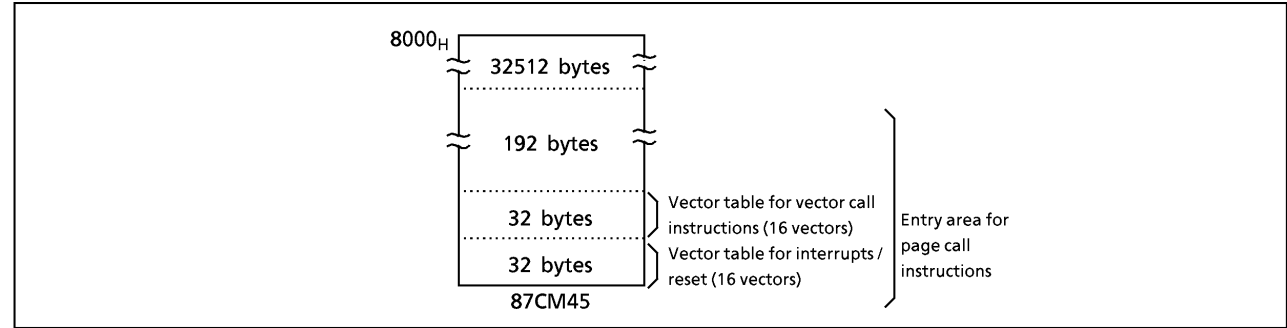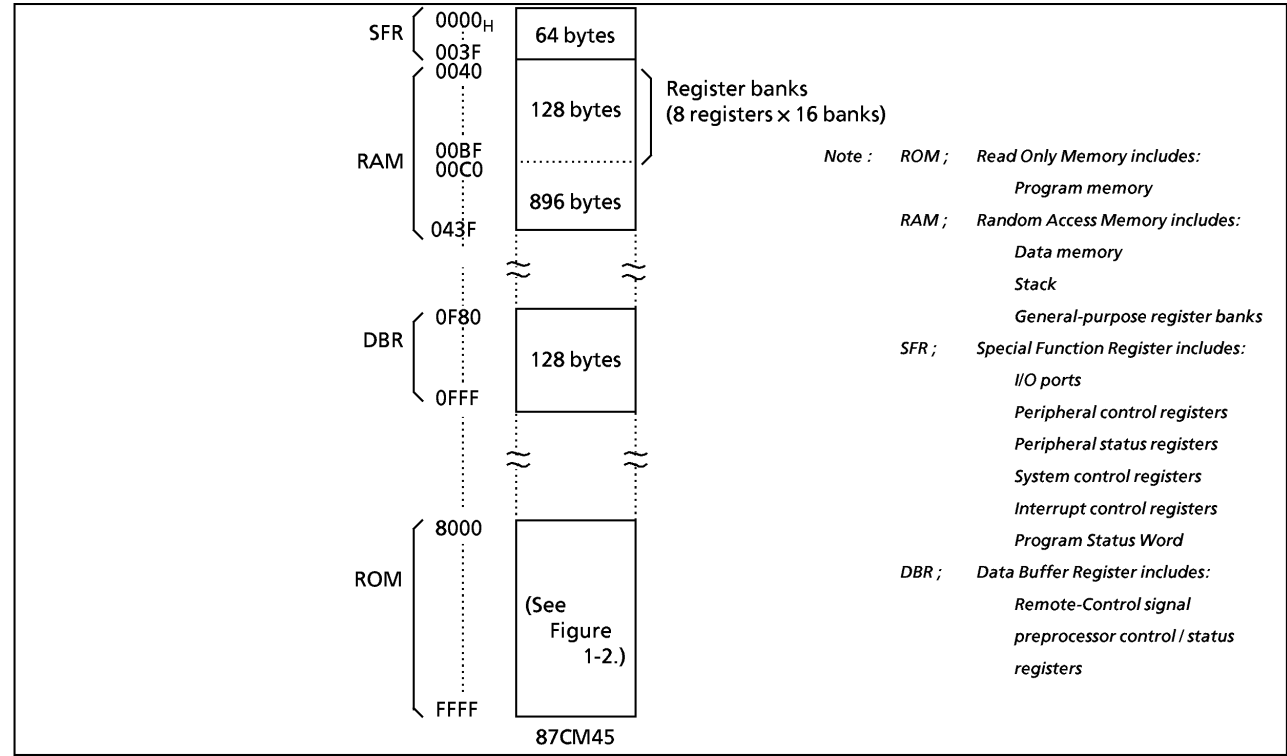

Electrical Characteristics

Absolute Maximum Ratings

(V_{SS} = 0 V)

Parameter	Symbol	Conditions	Ratings	Unit
Supply Voltage	V _{DD}		– 0.3 to 6.5	V
Input Voltage	V _{IN}		– 0.3 to V _{DD} + 0.3	V
Output Voltage	V _{OUT1}		– 0.3 to V _{DD} + 0.3	V
Output Current (Per 1 pin)	I _{OUT1}	Ports P0, P1, P2, P3, P4, P5, P64 to P67, P7	3.2	mA
	I _{OUT2}	Ports P60 to P63	30	
Output Current (Total)	Σ I _{OUT1}	Ports P0, P1, P2, P3, P4, P5, P64 to P67, P7	120	mA
	Σ I _{OUT2}	Ports P60 to P63	120	
Power Dissipation [Topr = 70°C]	PD		600	mW
Soldering Temperature (time)	Tsld		260 (10 s)	°C
Storage Temperature	Tstg		– 55 to 125	°C
Operating Temperature	Topr		– 30 to 70	°C

Note: The absolute maximum ratings are rated values which must not be exceeded during operation, even for an instant. Any one of the ratings must not be exceeded. If any absolute maximum rating is exceeded, a device may break down or its performance may be degraded, causing it to catch fire or explode resulting in injury to the user. Thus, when designing products which include this device, ensure that no absolute maximum rating value will ever be exceeded.

Recommended Operating Conditions

(V_{SS} = 0 V, Topr = – 30 to 70°C)

Parameter	Symbol	Pins	Conditions		Min	Max	Unit
Supply Voltage	V _{DD}		fc = 8 MHz	NORMAL1, 2 mode	4.5	5.5	V
				IDLE1, 2 mode			
			fs = 32.768 kHz	SLOW mode	2.7		
				SLEEP mode			
				STOP mode	2.0		
Input High Voltage	V _{IH1}	Except hysteresis input	V _{DD} ≥ 4.5 V		V _{DD} × 0.70	V _{DD}	V
	V _{IH2}	Hysteresis input			V _{DD} × 0.75		
	V _{IH3}		V _{DD} < 4.5 V	V _{DD} × 0.90			
Input Low Voltage	V _{IL1}	Except hysteresis input	V _{DD} ≥ 4.5 V		0	V _{DD} × 0.30	V
	V _{IL2}	Hysteresis input				V _{DD} × 0.25	
	V _{IL3}		V _{DD} < 4.5 V	V _{DD} × 0.01			
Clock Frequency	fc	XIN, XOUT	V _{DD} = 4.5 to 5.5 V		0.4	8.0	MHz
	fs	XTIN, XTOUT			30.0	34.0	kHz

Note 1: The recommended operating conditions for a device are operating conditions under which it can be guaranteed that the device will operate as specified. If the device is used under operating conditions other than the recommended operating conditions (supply voltage, operating temperature range, specified AC/DC values etc.), malfunction may occur. Thus, when designing products which include this device, ensure that the recommended operating conditions for the device are always adhered to.

Note 2: Clock frequency fc ; The condition of supply voltage range is the value in NORMAL 1/2 mode and IDLE 1/2 mode.

D.C. Characteristics

(V_{SS} = 0 V, T_{opr} = – 30 to 70°C)

Parameter	Symbol	Pins	Conditions	Min	Typ.	Max	Unit
Hysteresis Voltage	V _{HS}	Hysteresis inputs		–	0.9	–	V
Input Current	I _{IN1}	TEST	V _{DD} = 5.5 V, V _{IN} = 5.5 V / 0 V	–	–	± 2	μA
	I _{IN2}	Open drain ports	V _{DD} = 5.5 V, V _{IN} = 5.5 V	–	–	2	
	I _{IN3}	Tri-state ports	V _{DD} = 5.5 V, V _{IN} = 5.5 V / 0 V	–	–	± 2	
	I _{IN4}	RESET, STOP					
Input Resistance	R _{IN2}	RESET		100	220	450	kΩ
Output Leakage Current	I _{LO1}	Sink open drain ports	V _{DD} = 5.5 V, V _{OUT} = 5.5 V	–	–	2	μA
	I _{LO2}	Tri-state ports	V _{DD} = 5.5 V, V _{OUT} = 5.5 V / 0 V	–	–	± 2	
Output High Voltage	V _{OH2}	Tri-state ports	V _{DD} = 4.5 V, I _{OH} = – 0.7 mA	4.1	–	–	V
Output Low Voltage	V _{OL}	Except XOUT and ports P63 to P60	V _{DD} = 4.5 V, I _{OL} = 1.6 mA	–	–	0.4	V
Output Low current	I _{OL3}	Ports P63 to P60	V _{DD} = 4.5 V, V _{OL} = 1.0 V	–	20	–	V
Supply Current in NORMAL 1, 2 modes	I _{DD}		V _{DD} = 5.5 V, V _{IN} = 5.3 V / 0.2 V f _c = 8 MHz f _s = 32.768 kHz	–	T.B.D.	T.B.D.	mA
Supply Current in IDLE 1, 2 modes				–	T.B.D.	T.B.D.	
Supply Current in SLOW mode			V _{DD} = 3.0 V f _s = 32.768 kHz V _{IN} = 2.8 V / 0.2 V	–	T.B.D.	T.B.D.	μA
Supply Current in SLEEP mode				–	T.B.D.	T.B.D.	
Supply Current in STOP mode			V _{DD} = 5.5 V V _{IN} = 5.3 V / 0.2 V	–	0.5	10	μA

Note 1: Typical values show those at T_{opr} = 25°C, V_{DD} = 5 V.Note 2: Input Current I_{IN1}, I_{IN4}; The current through pull-up or pull-down resistor is not included.Note 3: Supply Current I_{DD}; The current (Typ. 0.5 mA) through ladder resistors of ADC is included in NORMAL mode and IDLE mode.

A / D Conversion Characteristics

(V_{SS} = 0 V, V_{DD} = 4.5 to 5.5 V, T_{opr} = – 30 to 70°C)

Parameter	Symbol	Conditions	Min	Typ.	Max	Unit
Analog Reference Voltage	V _{DD}	supplied from V _{DD} pin	–	V _{DD}	–	V
	V _{SS}	supplied from V _{SS} pin	–	0	0	
Analog Reference Voltage Range	ΔV _{AREF}	= V _{DD} – V _{SS}	–	V _{DD}	–	
Analog Input Voltage	V _{AIN}			–	V _{DD}	
Nonlinearity Error		V _{DD} = 4.5V to 5.5V	–	–	± 1	LSB
Zero Point Error			–	–	± 2	
Full Scale Error			–	–	± 2	
Total Error			–	–	± 3	



A.C. Characteristics

 $(V_{SS} = 0\text{ V}, V_{DD} = 4.5\text{ to }5.5\text{ V}, T_{opr} = -30\text{ to }70^{\circ}\text{C})$

Parameter	Symbol	Conditions	Min	Typ.	Max	Unit
Machine Cycle Time	t _{cy}	In NORMAL1, 2 modes	0.5	–	1.0	μs
		In IDLE1, 2 modes				
		In SLOW mode	117.6	–	133.3	
		In SLEEP mode				
High-Level Clock Pulse Width	t _{WCH}	For external clock operation (XIN input), fc = 8 MHz	50	–		ns
Low-Level Clock Pulse Width	t _{WCL}					
High-Level Clock Pulse Width	t _{WSH}	For external clock operation (XTIN input), fs = 32.768 kHz	14.7	–	–	μs
Low-Level Clock Pulse Width	t _{WSL}					

Recommended Oscillating Conditions

Parameter	Oscillator	Oscillation Frequency	Recommended Oscillator	Recommended Constant	
				C_1	C_2
High-frequency Oscillation	Ceramic Resonator	8 MHz	KYOCERA KBR8.0M	30 pF	30 pF
		4 MHz	KYOCERA KBR4.0MS		
			MURATA CSA4.00MG		
	Crystal Oscillator	8 MHz	TOYOCOM 210B 8.0000	20 pF	20 pF
		4 MHz	TOYOCOM 204B 4.0000		
Low-frequency Oscillation	Crystal Oscillator	32.768 kHz	NDK MX-38T	15 pF	15 pF



Note: To keep reliable operation, shield the device electrically with the metal plate on its package mold surface against the high electric field, for example, be CRT (Cathode Ray Tube).