


SWITCHING REGULATOR APPLICATION.  
HIGH VOLTAGE SWITCHING APPLICATION.

### FEATURES

- Excellent Switching Times.  
:  $t_{on}=0.5\mu S(\text{Max.})$ ,  $t_f=0.3\mu S(\text{Max.})$ , at  $I_C=2A$ .
- High Collector Voltage :  $V_{CEO}=500V$ .

### MAXIMUM RATINGS ( $T_a=25^\circ C$ )

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	$V_{CBO}$	800	V
Collector-Emitter Voltage	$V_{CEO}$	500	V
Emitter-Base Voltage	$V_{EBO}$	7	V
Collector Current	DC	$I_C$	3
	Pulse	$I_{CP}$	6
Base Current	$I_B$	1	A
Collector Power Dissipation ( $T_c=25^\circ C$ )	$P_C$	40	W
Junction Temperature	$T_j$	150	$^\circ C$
Storage Temperature Range	$T_{stg}$	-55 ~ 150	$^\circ C$

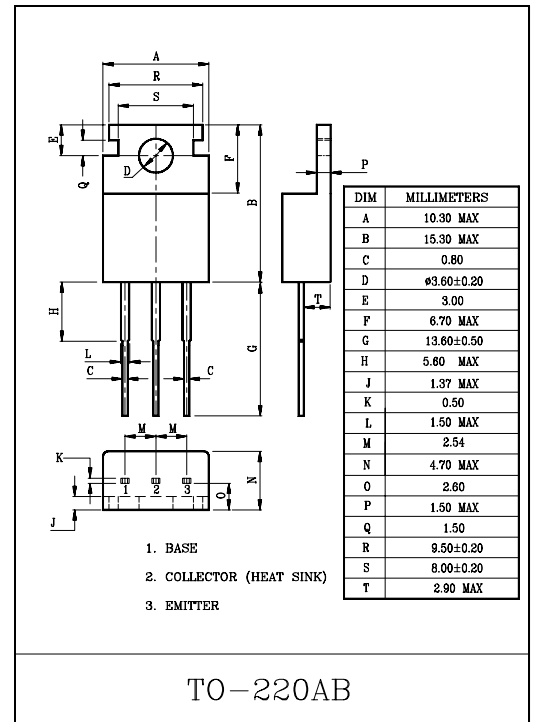







### ELECTRICAL CHARACTERISTICS ( $T_a=25^\circ C$ )

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	$I_{CBO}$	$V_{CB}=500V$ , $I_E=0$	-	-	10	$\mu A$
Emitter Cut-off Current	$I_{EBO}$	$V_{EB}=5V$ , $I_C=0$	-	-	10	$\mu A$
Collector-Emitter Sustaining Voltage	$V_{CEX(SUS)}$	$I_C=1.5A$ , $I_{B1}=-I_{B2}=0.6A$ $L=2mH$ , Clamped	500	-	-	V
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=1.5A$ , $I_B=0.3A$	-	-	1	V
Base-Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C=1.5A$ , $I_B=0.3A$	-	-	1.5	V
DC Current Gain	$h_{FE}(1)$ (Note)	$V_{CE}=5V$ , $I_C=0.3A$	15	-	50	
	$h_{FE}(2)$	$V_{CE}=5V$ , $I_C=1.5A$	8	-	-	
Collector Output Capacitance	$C_{ob}$	$V_{CB}=10V$ , $f=1MHz$	-	50	-	pF
Transition Frequency	$f_T$	$V_{CE}=10V$ , $I_C=0.3A$	-	18	-	MHz
Switching Time	Turn On Time	$t_{on}$			0.5	$\mu S$
	Storage Time	$t_{stg}$			3	
	Fall Time	$t_f$			0.3	

$I_{B1}=0.4A$ ,  $I_{B2}=-0.8A$   
DUTY CYCLE  $\leq 1\%$

Note :  $h_{FE}(1)$  Classification R:15~30, O:20~40, Y:30~50

# KTC4520

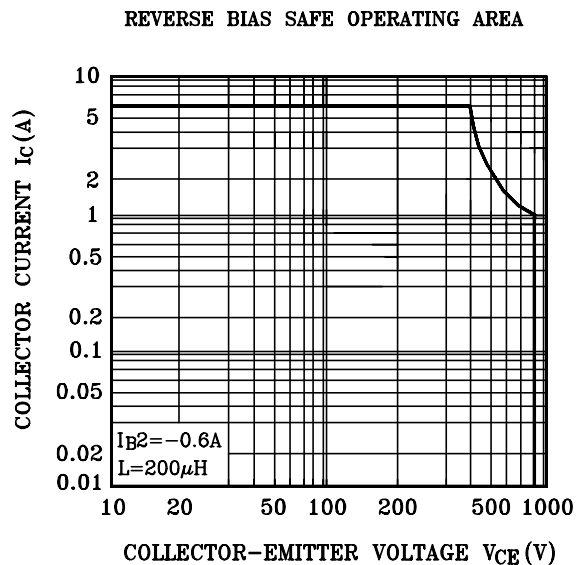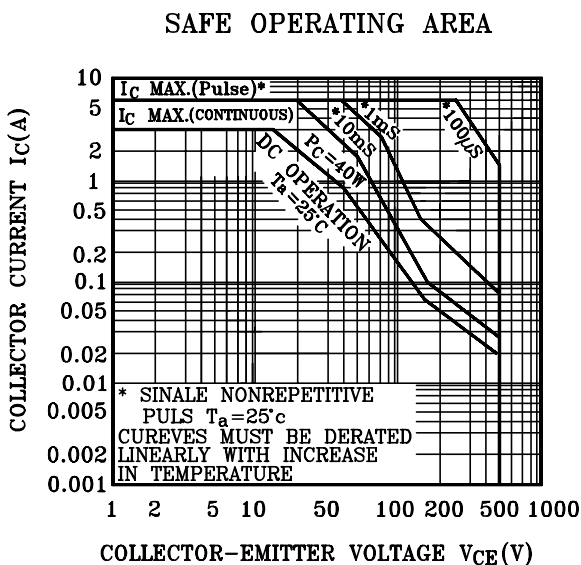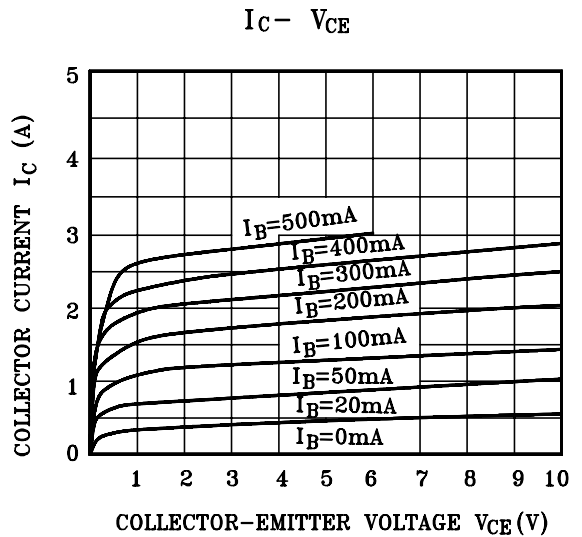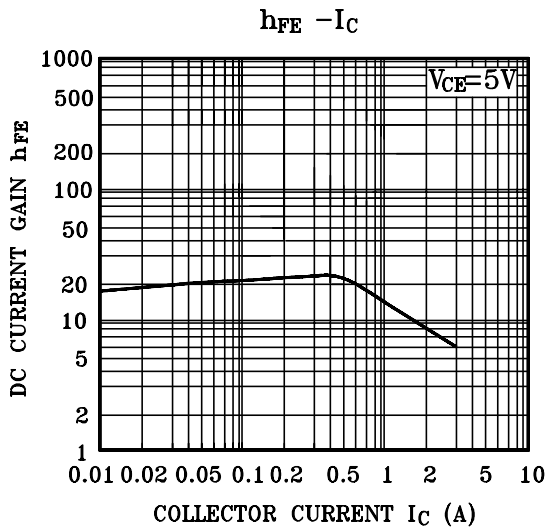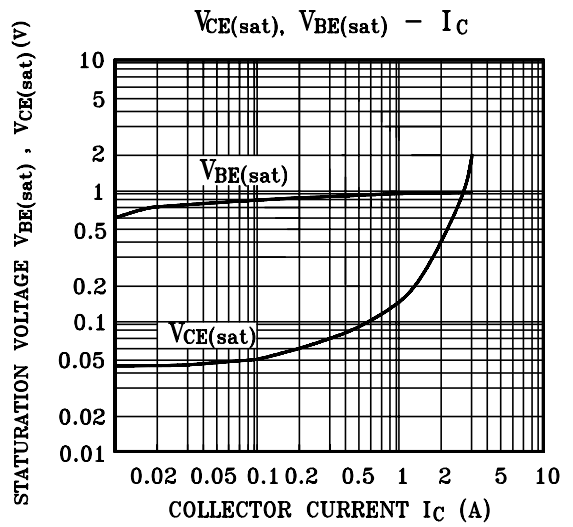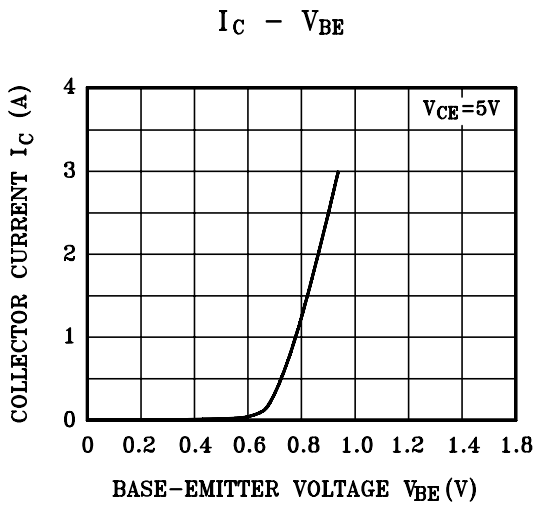

# KTC4520

