

## Advance Information


### TMOS E-FET™

## Power Field Effect Transistor DPAK for Surface Mount

### N-Channel Enhancement-Mode Silicon Gate

This advanced TMOS power FET is designed to withstand high energy in the avalanche and commutation modes. This new energy efficient design also offers a drain-to-source diode with a fast recovery time. Designed for low voltage, high speed switching applications such as power supplies, PWM motor controls and other inductive loads, the avalanche energy capability specified to eliminate the guesswork in designs where inductive loads are switched and offer additional safety margin against unexpected voltage transients.


- Avalanche Energy Specified at Elevated Temperature
- Low Stored Gate Charge for Efficient Switching
- Internal Source-to-Drain Diode Designed to Replace External Zener Transient Suppressor – Absorbs High Energy in the Avalanche Mode
- Source-to-Drain Diode Recovery Time Comparable to a Discrete Fast Recovery Diode
- Surface Mount Package Available in 16 mm, 13-inch/2500 Unit Tape & Reel, Add T4 Suffix to Part Number
- Available in Insertion Mount, Add -1 or 1 to Part Number



## MTD14N10E

Motorola Preferred Device

TMOS POWER FET  
14 AMPERES  
100 VOLTS  
 $R_{DS(on)} = 0.11 \Omega$



CASE 369A-13, Style 2  
DPAK

#### MAXIMUM RATINGS ( $T_C = 25^\circ\text{C}$ unless otherwise noted)

| Rating                                                                                                                                                              | Symbol                     | Value                | Unit                                  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------------------|---------------------------------------|
| Drain-to-Source Voltage                                                                                                                                             | $V_{DSS}$                  | 100                  | Vdc                                   |
| Drain-to-Gate Voltage ( $R_{GS} = 1.0 \text{ M}\Omega$ )                                                                                                            | $V_{DGR}$                  | 100                  | Vdc                                   |
| Gate-to-Source Voltage — Continuous<br>— Single Pulse ( $t_p \leq 50 \mu\text{s}$ )                                                                                 | $V_{GS}$<br>$V_{GSM}$      | $\pm 20$<br>$\pm 25$ | Vdc<br>Vdc                            |
| Drain Current — Continuous<br>— Continuous @ $100^\circ\text{C}$<br>— Single Pulse ( $t_p \leq 10 \mu\text{s}$ )                                                    | $I_D$<br>$I_D$<br>$I_{DM}$ | 14<br>10<br>49       | Adc<br>Adc<br>Apk                     |
| Total Power Dissipation<br>Derate above $25^\circ\text{C}$<br>Total Power Dissipation @ $T_C = 25^\circ\text{C}$ when mounted with the minimum recommended pad size | $P_D$                      | 72<br>0.58<br>1.75   | Watts<br>W/ $^\circ\text{C}$<br>Watts |
| Operating and Storage Temperature Range                                                                                                                             | $T_J, T_{stg}$             | -55 to 150           | $^\circ\text{C}$                      |

#### UNCLAMPED DRAIN-TO-SOURCE AVALANCHE CHARACTERISTICS ( $T_J < 150^\circ\text{C}$ )

|                                                                                                                                                                                                                         |          |    |    |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|----|----|
| Single Pulse Drain-to-Source Avalanche Energy — STARTING $T_J = 25^\circ\text{C}$<br>( $V_{DD} = 75 \text{ Vdc}$ , $V_{GS} = 10 \text{ Vdc}$ , PEAK $I_L = 14 \text{ Apk}$ , $L = 1.0 \text{ mH}$ , $R_G = 25 \Omega$ ) | $E_{AS}$ | 98 | mJ |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|----|----|

#### THERMAL CHARACTERISTICS

|                                                                                             |                                                       |                     |                    |
|---------------------------------------------------------------------------------------------|-------------------------------------------------------|---------------------|--------------------|
| Thermal Resistance — Junction to Case<br>— Junction to Ambient<br>— Junction to Ambient (1) | $R_{\theta JC}$<br>$R_{\theta JA}$<br>$R_{\theta JA}$ | 1.73<br>100<br>71.4 | $^\circ\text{C/W}$ |
| Maximum Lead Temperature for Soldering Purposes, 1/8" from case for 10 seconds              | $T_L$                                                 | 260                 | $^\circ\text{C}$   |

(1) When surface mounted to an FR4 board using the minimum recommended pad size.

This document contains information on a new product. Specifications and information herein are subject to change without notice.

E-FET is a trademark of Motorola, Inc. TMOS is a registered trademark of Motorola, Inc.

Preferred devices are Motorola recommended choices for future use and best overall value.



# MTD14N10E

## ELECTRICAL CHARACTERISTICS (T<sub>J</sub> = 25°C unless otherwise noted)

| Characteristic                                                                                                                                                          | Symbol               | Min      | Typ      | Max       | Unit        |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|----------|----------|-----------|-------------|
| <b>OFF CHARACTERISTICS</b>                                                                                                                                              |                      |          |          |           |             |
| Drain-to-Source Breakdown Voltage<br>(V <sub>GS</sub> = 0 Vdc, I <sub>D</sub> = 0.25 mAdc)<br>Temperature Coefficient (Positive)                                        | V <sub>(BR)DSS</sub> | 100<br>— | —<br>112 | —<br>—    | Vdc<br>V/°C |
| Zero Gate Voltage Drain Current<br>(V <sub>DS</sub> = 100 Vdc, V <sub>GS</sub> = 0 Vdc)<br>(V <sub>DS</sub> = 100 Vdc, V <sub>GS</sub> = 0 Vdc, T <sub>J</sub> = 125°C) | I <sub>DSS</sub>     | —<br>—   | —<br>—   | 10<br>100 | μAdc        |
| Gate-Body Leakage Current (V <sub>GS</sub> = ± 20 Vdc, V <sub>DS</sub> = 0 Vdc)                                                                                         | I <sub>GSS</sub>     | —        | —        | 100       | nAdc        |

## ON CHARACTERISTICS (1)

|                                                                                                                                                                   |                     |          |            |              |              |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|----------|------------|--------------|--------------|
| Gate Threshold Voltage<br>(V <sub>DS</sub> = V <sub>GS</sub> , I <sub>D</sub> = 0.25 mAdc)<br>Threshold Temperature Coefficient (Negative)                        | V <sub>GS(th)</sub> | 2.0<br>— | 2.9<br>6.2 | 4.0<br>—     | Vdc<br>mV/°C |
| Static Drain-to-Source On-Resistance<br>(V <sub>GS</sub> = 10 Vdc, I <sub>D</sub> = 8.0 Adc)                                                                      | R <sub>DS(on)</sub> | —        | 0.098      | 0.11         | Ohms         |
| Drain-to-Source On-Voltage<br>(V <sub>GS</sub> = 10 Vdc, I <sub>D</sub> = 14 Adc)<br>(V <sub>GS</sub> = 10 Vdc, I <sub>D</sub> = 8.0 Adc, T <sub>J</sub> = 125°C) | V <sub>DS(on)</sub> | —<br>—   | —<br>—     | 1.85<br>1.62 | Vdc          |
| Forward Transconductance (V <sub>DS</sub> = 15 Vdc, I <sub>D</sub> = 8.0 Adc)                                                                                     | g <sub>FS</sub>     | 4.0      | 7.4        | —            | mhos         |

## DYNAMIC CHARACTERISTICS

|                      |                                                                     |                  |   |     |     |    |
|----------------------|---------------------------------------------------------------------|------------------|---|-----|-----|----|
| Input Capacitance    | (V <sub>DS</sub> = 25 Vdc, V <sub>GS</sub> = 0 Vdc,<br>f = 1.0 MHz) | C <sub>iss</sub> | — | 700 | 980 | pF |
| Output Capacitance   |                                                                     | C <sub>oss</sub> | — | 200 | 280 |    |
| Transfer Capacitance |                                                                     | C <sub>rss</sub> | — | 65  | 130 |    |

## SWITCHING CHARACTERISTICS (2)

|                     |                                                                                                             |                     |   |     |     |    |
|---------------------|-------------------------------------------------------------------------------------------------------------|---------------------|---|-----|-----|----|
| Turn-On Delay Time  | (V <sub>DS</sub> = 50 Vdc, I <sub>D</sub> = 14 Adc,<br>V <sub>GS</sub> = 10 Vdc,<br>R <sub>G</sub> = 9.1 Ω) | t <sub>d(on)</sub>  | — | 9.0 | 20  | ns |
| Rise Time           |                                                                                                             | t <sub>r</sub>      | — | 58  | 120 |    |
| Turn-Off Delay Time |                                                                                                             | t <sub>d(off)</sub> | — | 26  | 50  |    |
| Fall Time           |                                                                                                             | t <sub>f</sub>      | — | 33  | 70  |    |
| Gate Charge         | (V <sub>DS</sub> = 80 Vdc, I <sub>D</sub> = 14 Adc,<br>V <sub>GS</sub> = 10 Vdc)                            | Q <sub>T</sub>      | — | 26  | 40  | nC |
|                     |                                                                                                             | Q <sub>1</sub>      | — | 5.0 | —   |    |
|                     |                                                                                                             | Q <sub>2</sub>      | — | 13  | —   |    |
|                     |                                                                                                             | Q <sub>3</sub>      | — | 11  | —   |    |

## SOURCE-DRAIN DIODE CHARACTERISTICS

|                                |                                                                                                                                  |                 |        |              |          |     |
|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------|-----------------|--------|--------------|----------|-----|
| Forward On-Voltage             | (I <sub>S</sub> = 14 Adc, V <sub>GS</sub> = 0 Vdc)<br>(I <sub>S</sub> = 14 Adc, V <sub>GS</sub> = 0 Vdc, T <sub>J</sub> = 125°C) | V <sub>SD</sub> | —<br>— | 0.92<br>0.80 | 1.2<br>— | Vdc |
| Reverse Recovery Time          | (I <sub>S</sub> = 14 Adc,<br>dI <sub>S</sub> /dt = 100 A/μs)                                                                     | t <sub>rr</sub> | —      | 103          | —        | nS  |
|                                |                                                                                                                                  | t <sub>a</sub>  | —      | 78           | —        |     |
|                                |                                                                                                                                  | t <sub>b</sub>  | —      | 25           | —        |     |
| Reverse Recovery Stored Charge |                                                                                                                                  | Q <sub>RR</sub> | —      | 0.46         | —        | μC  |

- (1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2%.  
 (2) Switching characteristics are independent of operating junction temperature.  
 (3) Reflects typical values.  $C_{pk} = \left| \frac{\text{Max limit} - \text{Typ}}{3 \times \text{sigma}} \right|$

# TYPICAL ELECTRICAL CHARACTERISTICS

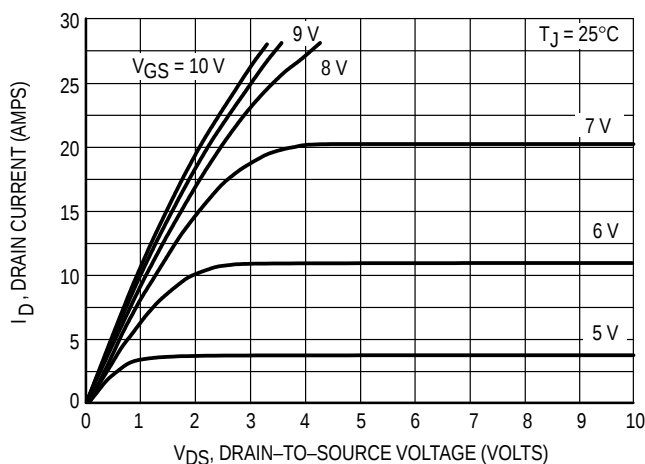


Figure 1. On-Region Characteristics

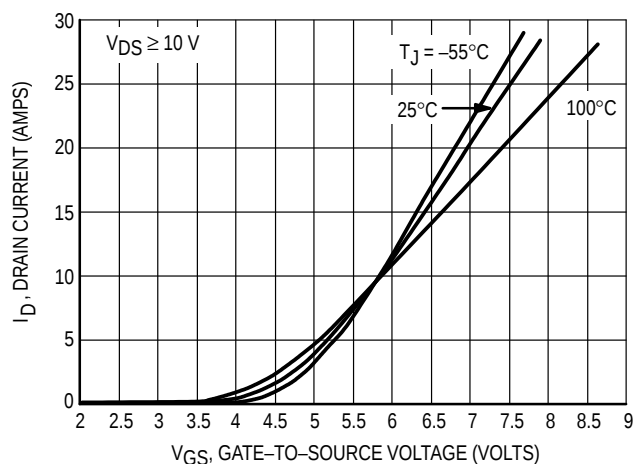


Figure 2. Transfer Characteristics

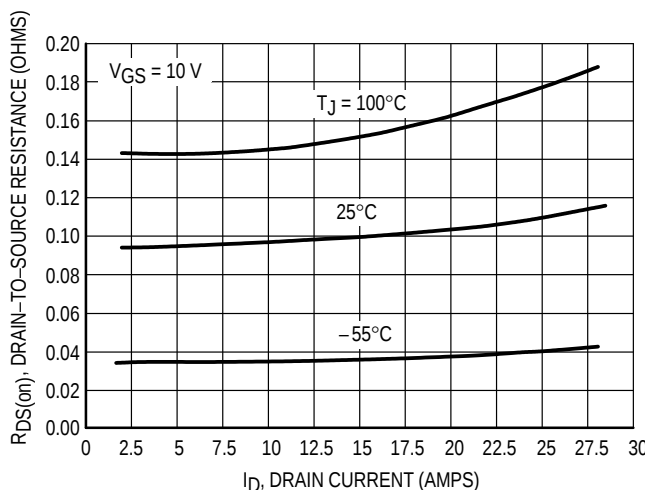


Figure 3. On-Resistance versus Drain Current and Temperature

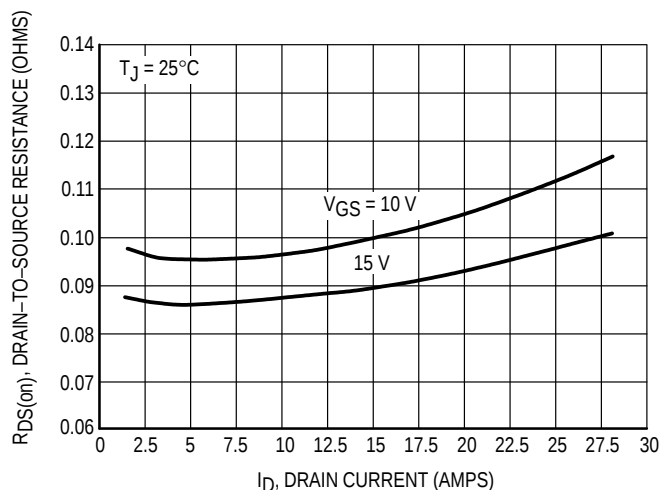


Figure 4. On-Resistance versus Drain Current and Gate Voltage

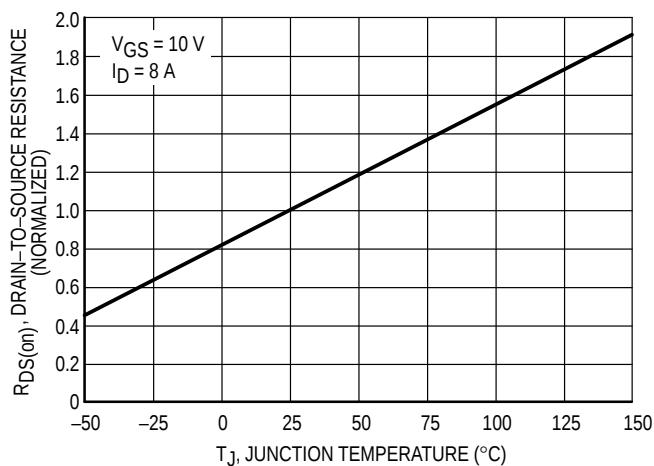


Figure 5. On-Resistance Variation with Temperature

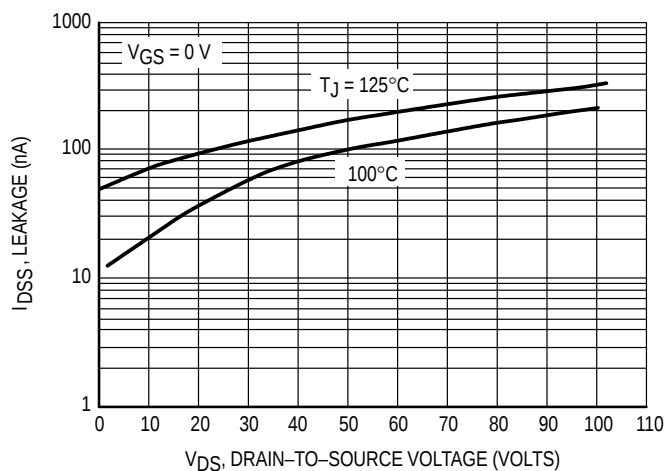


Figure 6. Drain-To-Source Leakage Current versus Voltage

## POWER MOSFET SWITCHING

Switching behavior is most easily modeled and predicted by recognizing that the power MOSFET is charge controlled. The lengths of various switching intervals ( $\Delta t$ ) are determined by how fast the FET input capacitance can be charged by current from the generator.

The published capacitance data is difficult to use for calculating rise and fall because drain–gate capacitance varies greatly with applied voltage. Accordingly, gate charge data is used. In most cases, a satisfactory estimate of average input current ( $I_{G(AV)}$ ) can be made from a rudimentary analysis of the drive circuit so that

$$t = Q/I_{G(AV)}$$

During the rise and fall time interval when switching a resistive load,  $V_{GS}$  remains virtually constant at a level known as the plateau voltage,  $V_{GSP}$ . Therefore, rise and fall times may be approximated by the following:

$$t_r = Q_2 \times R_G / (V_{GG} - V_{GSP})$$

$$t_f = Q_2 \times R_G / V_{GSP}$$

where

$V_{GG}$  = the gate drive voltage, which varies from zero to  $V_{GG}$

$R_G$  = the gate drive resistance

and  $Q_2$  and  $V_{GSP}$  are read from the gate charge curve.

During the turn–on and turn–off delay times, gate current is not constant. The simplest calculation uses appropriate values from the capacitance curves in a standard equation for voltage change in an RC network. The equations are:

$$t_{d(on)} = R_G C_{iss} \ln [V_{GG}/(V_{GG} - V_{GSP})]$$

$$t_{d(off)} = R_G C_{iss} \ln (V_{GG}/V_{GSP})$$

The capacitance ( $C_{iss}$ ) is read from the capacitance curve at a voltage corresponding to the off–state condition when calculating  $t_{d(on)}$  and is read at a voltage corresponding to the on–state when calculating  $t_{d(off)}$ .

At high switching speeds, parasitic circuit elements complicate the analysis. The inductance of the MOSFET source lead, inside the package and in the circuit wiring which is common to both the drain and gate current paths, produces a voltage at the source which reduces the gate drive current. The voltage is determined by  $L di/dt$ , but since  $di/dt$  is a function of drain current, the mathematical solution is complex. The MOSFET output capacitance also complicates the mathematics. And finally, MOSFETs have finite internal gate resistance which effectively adds to the resistance of the driving source, but the internal resistance is difficult to measure and, consequently, is not specified.

The resistive switching time variation versus gate resistance (Figure 9) shows how typical switching performance is affected by the parasitic circuit elements. If the parasitics were not present, the slope of the curves would maintain a value of unity regardless of the switching speed. The circuit used to obtain the data is constructed to minimize common inductance in the drain and gate circuit loops and is believed readily achievable with board mounted components. Most power electronic loads are inductive; the data in the figure is taken with a resistive load, which approximates an optimally snubbed inductive load. Power MOSFETs may be safely operated into an inductive load; however, snubbing reduces switching losses.

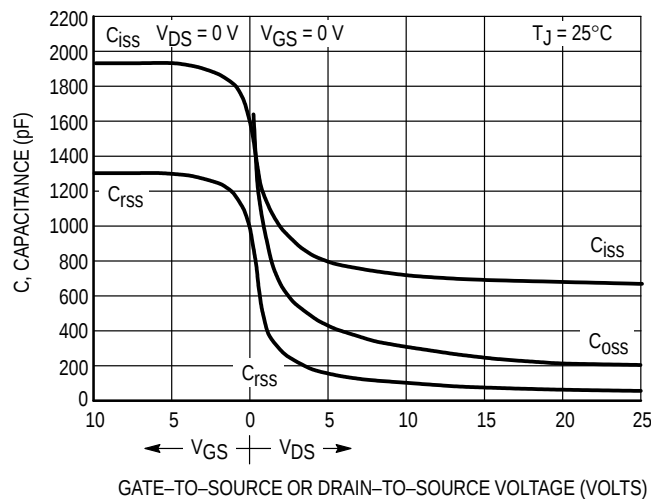


Figure 7. Capacitance Variation

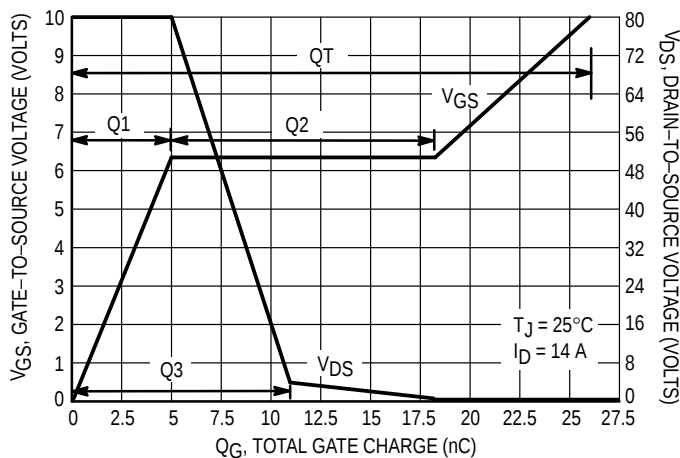


Figure 8. Gate-To-Source and Drain-To-Source Voltage versus Total Charge

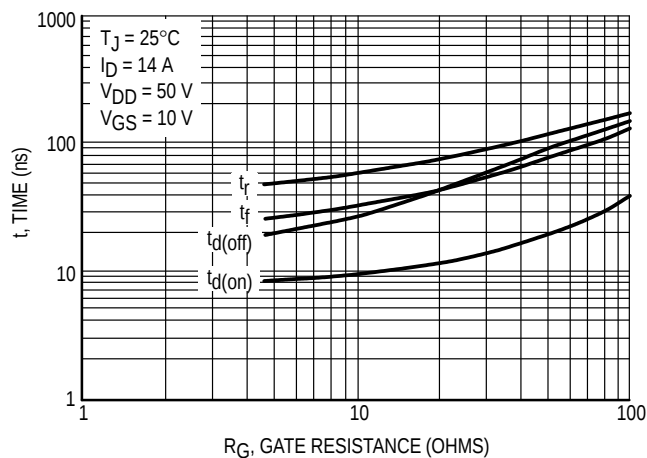


Figure 9. Resistive Switching Time Variation versus Gate Resistance

### DRAIN-TO-SOURCE DIODE CHARACTERISTICS

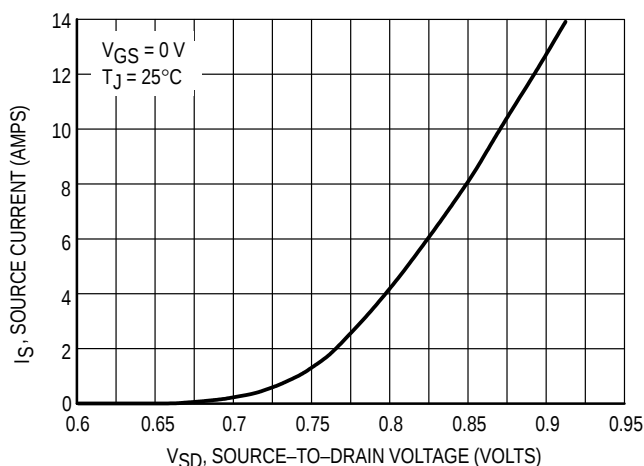


Figure 10. Diode Forward Voltage versus Current

### SAFE OPERATING AREA

The Forward Biased Safe Operating Area curves define the maximum simultaneous drain-to-source voltage and drain current that a transistor can handle safely when it is forward biased. Curves are based upon maximum peak junction temperature and a case temperature ( $T_C$ ) of 25°C. Peak repetitive pulsed power limits are determined by using the thermal response data in conjunction with the procedures discussed in AN569, "Transient Thermal Resistance—General Data and Its Use."


Switching between the off-state and the on-state may traverse any load line provided neither rated peak current ( $I_{DM}$ ) nor rated voltage ( $V_{DSS}$ ) is exceeded and the transition time ( $t_r, t_f$ ) do not exceed 10  $\mu s$ . In addition the total power averaged over a complete switching cycle must not exceed  $(T_J(MAX) - T_C)/(R_{\theta JC})$ .

A Power MOSFET designated E-FET can be safely used in switching circuits with unclamped inductive loads. For reli-


able operation, the stored energy from circuit inductance dissipated in the transistor while in avalanche must be less than the rated limit and adjusted for operating conditions differing from those specified. Although industry practice is to rate in terms of energy, avalanche energy capability is not a constant. The energy rating decreases non-linearly with an increase of peak current in avalanche and peak junction temperature.

Although many E-FETs can withstand the stress of drain-to-source avalanche at currents up to rated pulsed current ( $I_{DM}$ ), the energy rating is specified at rated continuous current ( $I_D$ ), in accordance with industry custom. The energy rating must be derated for temperature as shown in the accompanying graph (Figure 12). Maximum energy at currents below rated continuous  $I_D$  can safely be assumed to equal the values indicated.


# SAFE OPERATING AREA

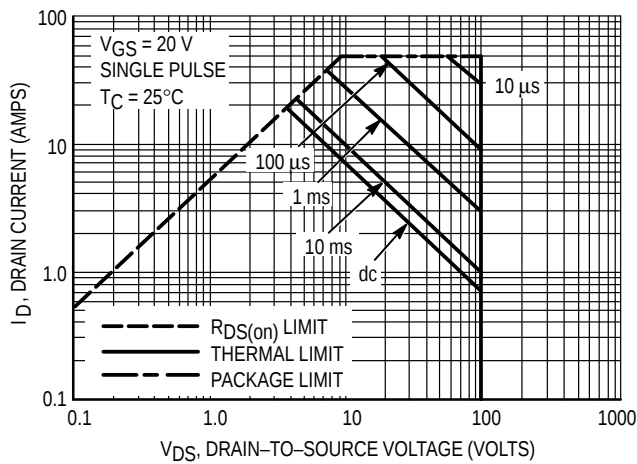


**Figure 11. Maximum Rated Forward Biased Safe Operating Area**

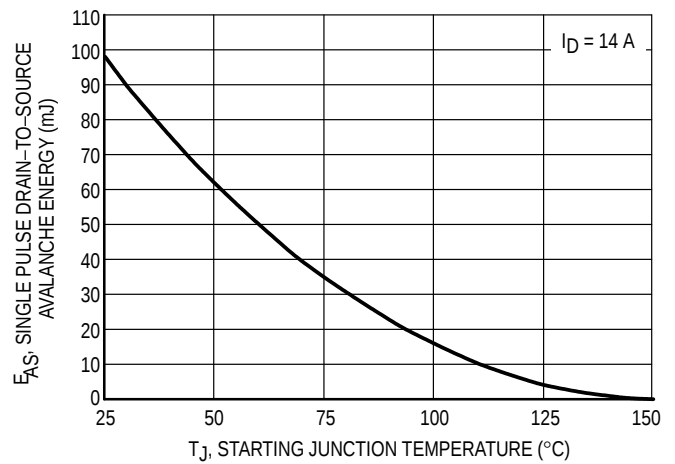

**Figure 12. Maximum Avalanche Energy versus Starting Junction Temperature**

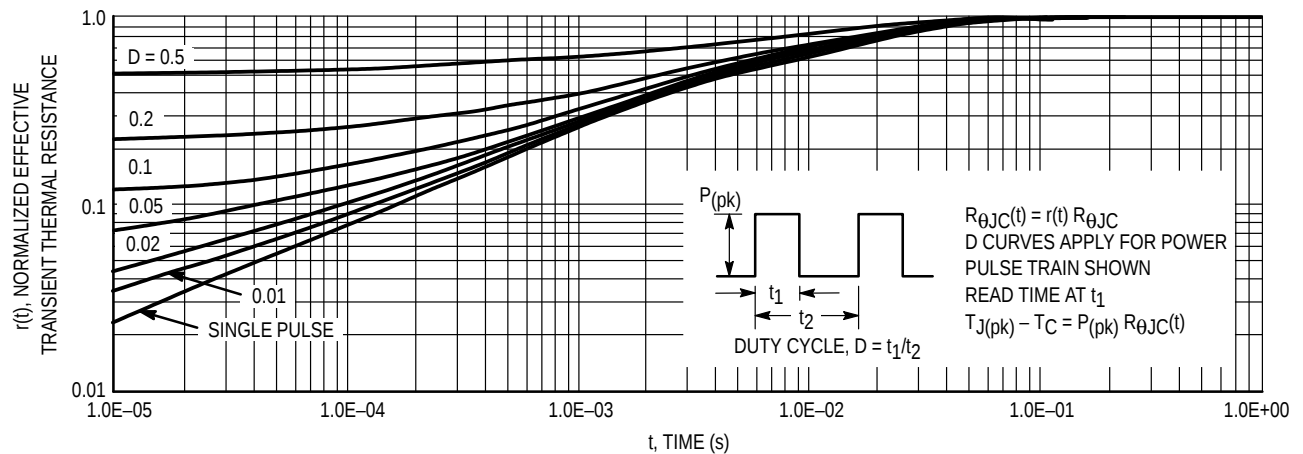


**Figure 13. Thermal Response**

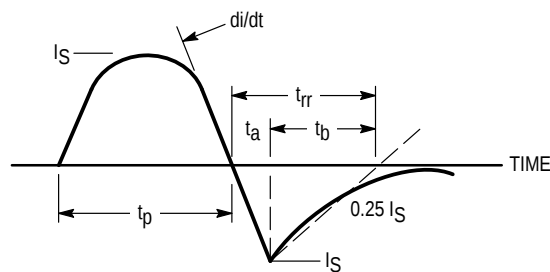

**Figure 14. Diode Reverse Recovery Waveform**

PACKAGE DIMENSIONS

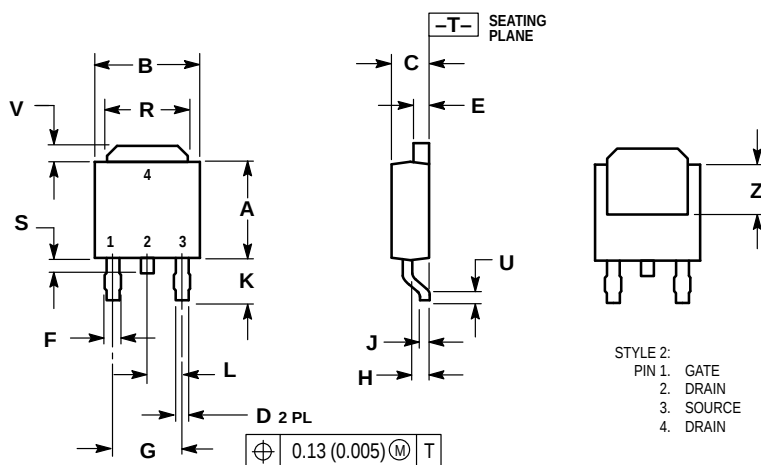

CASE 369A-13  
ISSUE Y

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: INCH.

| DIM | INCHES    |       | MILLIMETERS |      |
|-----|-----------|-------|-------------|------|
|     | MIN       | MAX   | MIN         | MAX  |
| A   | 0.235     | 0.250 | 5.97        | 6.35 |
| B   | 0.250     | 0.265 | 6.35        | 6.73 |
| C   | 0.086     | 0.094 | 2.19        | 2.38 |
| D   | 0.027     | 0.035 | 0.69        | 0.88 |
| E   | 0.033     | 0.040 | 0.84        | 1.01 |
| F   | 0.037     | 0.047 | 0.94        | 1.19 |
| G   | 0.180 BSC |       | 4.58 BSC    |      |
| H   | 0.034     | 0.040 | 0.87        | 1.01 |
| J   | 0.018     | 0.023 | 0.46        | 0.58 |
| K   | 0.102     | 0.114 | 2.60        | 2.89 |
| L   | 0.090 BSC |       | 2.29 BSC    |      |
| R   | 0.175     | 0.215 | 4.45        | 5.46 |
| S   | 0.020     | 0.050 | 0.51        | 1.27 |
| U   | 0.020     | —     | 0.51        | —    |
| V   | 0.030     | 0.050 | 0.77        | 1.27 |
| Z   | 0.138     | —     | 3.51        | —    |

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and  are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

Mfax is a trademark of Motorola, Inc.

**How to reach us:**

**USA/EUROPE/Locations Not Listed:** Motorola Literature Distribution;  
P.O. Box 5405, Denver, Colorado 80217. 1-303-675-2140 or 1-800-441-2447

**JAPAN:** Nippon Motorola Ltd.: SPD, Strategic Planning Office, 4-32-1,  
Nishi-Gotanda, Shinagawa-ku, Tokyo 141, Japan. 81-3-5487-8488

**Customer Focus Center: 1-800-521-6274**

**Mfax™:** RMFAX0@email.sps.mot.com – TOUCHTONE 1-602-244-6609  
Motorola Fax Back System – US & Canada ONLY 1-800-774-1848  
– <http://sps.motorola.com/mfax/>

**ASIA/PACIFIC:** Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park,  
51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298

**HOME PAGE:** <http://motorola.com/sps/>

**MOTOROLA**