

CMOS System Reset Monolithic IC PST38XXU Series

Outline

This open drain output system reset IC, developed using the CMOS process. Super low consumption current of 1.0 μ A typ. (PST3810 ~ PST3819) has been achieved through use of the CMOS process. Also, detection voltage is high precision detection of $\pm 2\%$.

Features

- | | |
|--------------------------------------|---|
| (1) Super low consumption current | 1.0 μ A typ. (when $V_{DD} = (-V_{DET}) + 2.0V$) PST3810 ~ PST3819 |
| (2) High precision detection voltage | $\pm 2\%$ |
| (3) Operating range | 0.7 ~ 10V |
| (4) Wide operating temperature range | $-30 \sim +85^{\circ}C$ |
| (5) Detection voltage | 0.9 ~ 6.0V (0.1V step) |


Package

SC-82AB

Applications

- (1) Microcomputer, CPU, MPU reset circuits
- (2) Logic circuit reset circuits
- (3) Battery voltage check circuits
- (4) Back-up circuit switching circuits
- (5) Level detection circuits


Pin Assignment



SC-82AB
 (TOP VIEW)

1	OUT
2	V_{DD}
3	NC
4	GND

Block Diagram

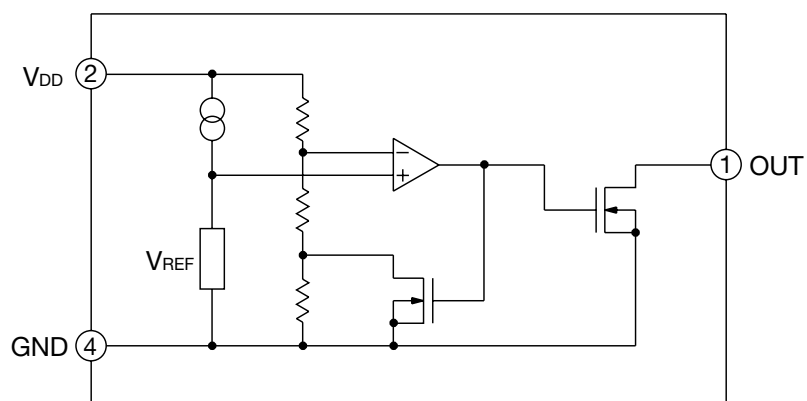

Pin Explanations

Pin No.	Pin Name	Function
1	OUT	Reset Signal Output Pin
2	V _{DD}	V _{DD} Pin/Voltage Detect Pin
3	NC	
4	GND	GND Pin

Absolute Maximum Ratings (Ta=25°C)

Item	Symbol	Rating	Unit
Operating Temperature	T _{OPT}	-30~+85	°C
Storage Temperature	T _{STG}	-40~+125	°C
Supply Voltage	V _{DDmax.}	12	V
Output Voltage	V _{OUT}	V _{SS} -0.3~12	V
Output Current	I _{OUT}	70	mA
Power Dissipation	P _D	150	mW

Recommended Operating Conditions

Item	Symbol	Rating	Unit
Operating Temperature	T _{OPT}	-30~+85	°C
Supply Voltage	V _{DD}	+0.70~+10	V

Electrical Characteristics (Unless otherwise specified, Ta=25°C)

Product Name	Item											
	Detecting Voltage			Hysteresis Voltage			Supply Current1			Supply Current2		
	-V _{DET} (V)			V _{HYS} (V)			I _{SS1} (μA)			I _{SS2} (μA)		
	Test Circuit 2			Test Circuit 2			Test Circuit 1			Test Circuit 1		
	Min.	Typ.	Max.	Min.	Typ.	Max.	Condition	Typ.	Max.	Condition	Typ.	Max.
PST3809	0.882	0.900	0.918	0.027	0.045	0.063	V _{DD} = (-V _{DET}) -0.10V	1.5	3.7	V _{DD} = (-V _{DET}) +2.0V	0.9	2.7
PST3810	0.980	1.000	1.020	0.030	0.050	0.070						
PST3811	1.078	1.100	1.122	0.033	0.055	0.077		1.8	4.5			
PST3812	1.176	1.200	1.224	0.036	0.060	0.084						
PST3813	1.274	1.300	1.326	0.039	0.065	0.091		2.0	5.0			
PST3814	1.372	1.400	1.428	0.042	0.070	0.098					1.0	3.0
PST3815	1.470	1.500	1.530	0.045	0.075	0.105						
PST3816	1.568	1.600	1.632	0.048	0.080	0.112		2.5	5.5			
PST3817	1.666	1.700	1.734	0.051	0.085	0.119						
PST3818	1.764	1.800	1.836	0.054	0.090	0.126						
PST3819	1.862	1.900	1.938	0.057	0.095	0.133						
PST3820	1.960	2.000	2.040	0.060	0.100	0.140						
PST3821	2.058	2.100	2.142	0.063	0.105	0.147		3.0	6.0			
PST3822	2.156	2.200	2.244	0.066	0.110	0.154						
PST3823	2.254	2.300	2.346	0.069	0.115	0.161					1.1	3.3
PST3824	2.352	2.400	2.448	0.072	0.120	0.168						
PST3825	2.450	2.500	2.550	0.075	0.125	0.175	V _{DD} = (-V _{DET}) -0.13V	3.5	7.0	V _{DD} = (-V _{DET}) +2.0V		
PST3826	2.548	2.600	2.652	0.078	0.130	0.182						
PST3827	2.646	2.700	2.754	0.081	0.135	0.189						
PST3828	2.744	2.800	2.856	0.084	0.140	0.196						
PST3829	2.842	2.900	2.958	0.087	0.145	0.203						
PST3830	2.940	3.000	3.060	0.090	0.150	0.210		4.0	8.0			
PST3831	3.038	3.100	3.162	0.093	0.155	0.217						
PST3832	3.136	3.200	3.264	0.096	0.160	0.224						
PST3833	3.234	3.300	3.366	0.099	0.165	0.231					1.2	3.6
PST3834	3.332	3.400	3.468	0.102	0.170	0.238						
PST3835	3.430	3.500	3.570	0.105	0.175	0.245		4.5	9.0			
PST3836	3.528	3.600	3.672	0.108	0.180	0.252						
PST3837	3.626	3.700	3.774	0.111	0.185	0.259						
PST3838	3.724	3.800	3.876	0.114	0.190	0.266						
PST3839	3.822	3.900	3.978	0.117	0.195	0.273	V _{DD} = (-V _{DET}) -0.16V					
PST3840	3.920	4.000	4.080	0.120	0.200	0.280		5.0	10.0			
PST3841	4.018	4.100	4.182	0.123	0.205	0.287						
PST3842	4.116	4.200	4.284	0.126	0.210	0.294						
PST3843	4.214	4.300	4.386	0.129	0.215	0.301					1.3	3.9
PST3844	4.312	4.400	4.488	0.132	0.220	0.308						
PST3845	4.410	4.500	4.590	0.135	0.225	0.315						
PST3846	4.508	4.600	4.692	0.138	0.230	0.322		5.5	11.0			
PST3847	4.606	4.700	4.794	0.141	0.235	0.329						
PST3848	4.704	4.800	4.896	0.144	0.240	0.336						
PST3849	4.802	4.900	4.998	0.147	0.245	0.343						
PST3850	4.900	5.000	5.100	0.150	0.250	0.350	V _{DD} = (-V _{DET}) -0.20V					
PST3851	4.998	5.100	5.202	0.153	0.255	0.357		6.0	12.0			
PST3852	5.096	5.200	5.304	0.156	0.260	0.364						
PST3853	5.194	5.300	5.406	0.159	0.265	0.371						
PST3854	5.292	5.400	5.508	0.162	0.270	0.378						
PST3855	5.390	5.500	5.610	0.165	0.275	0.385					1.4	4.2
PST3856	5.488	5.600	5.712	0.168	0.280	0.392						
PST3857	5.586	5.700	5.814	0.171	0.285	0.399		6.5	13.0			
PST3858	5.684	5.800	5.916	0.174	0.290	0.406						
PST3859	5.782	5.900	6.018	0.177	0.295	0.413						
PST3860	5.880	6.000	6.120	0.180	0.300	0.420						

Electrical Characteristics (Unless otherwise specified, Ta=25°C)

Product Name	Item									
	Output Current1			Output Current2				Leak Current		
	I _{OUT1} (mA)			I _{OUT2} (mA)				I _{LEAK} (μA)		
	Test Circuit 3			Test Circuit 3				Test Circuit 3		
	Condition	Min.	Typ.	Condition		Min.	Typ.	Condition	Typ.	Max.
PST3809	N-ch V _{DS} = 0.05V V _{DD} = 0.7V	0.01	0.05	N-ch V _{DS} = 0.5V	V _{DD} =0.85V	0.05	0.5	V _{DD} = 10V V _{DS} = 10V	-	0.1
PST3810					V _{DD} =1.0V	0.2	1.0			
PST3811										
PST3812										
PST3813										
PST3814					V _{DD} =1.0V	0.2	1.0			
PST3815										
PST3816										
PST3817										
PST3818					V _{DD} =1.0V	0.2	1.0			
PST3819										
PST3820										
PST3821										
PST3822					V _{DD} =1.0V	0.2	1.0			
PST3823										
PST3824										
PST3825										
PST3826					V _{DD} =1.0V	0.2	1.0			
PST3827										
PST3828										
PST3829										
PST3830					V _{DD} =1.0V	0.2	1.0			
PST3831										
PST3832										
PST3833										
PST3834					V _{DD} =1.0V	0.2	1.0			
PST3835										
PST3836										
PST3837										
PST3838					V _{DD} =1.0V	0.2	1.0			
PST3839										
PST3840										
PST3841										
PST3842					V _{DD} =1.0V	0.2	1.0			
PST3843										
PST3844										
PST3845										
PST3846					V _{DD} =1.0V	0.2	1.0			
PST3847										
PST3848										
PST3849										
PST3850					V _{DD} =1.0V	0.2	1.0			
PST3851										
PST3852										
PST3853										
PST3854					V _{DD} =1.0V	0.2	1.0			
PST3855										
PST3856										
PST3857										
PST3858					V _{DD} =1.0V	0.2	1.0			
PST3859										
PST3860										


Electrical Characteristics

(Unless otherwise specified, Ta=25°C)


Product Name	Item							
	Threshold Operating Voltage1			Threshold Operating Voltage2			Detecting Voltage Temp. Coefficient	
	VDDL1(V)			VDDL2(V)			$\Delta -V_{DET} / \Delta T_{OPT}$ (ppm/°C)	
	Test Circuit 2			Test Circuit 2			Test Circuit 2	
	Condition	Typ.	Max.	Condition	Typ.	Max.	Condition	Typ.
PST3809								
PST3810								
PST3811								
PST3812								
PST3813								
PST3814								
PST3815								
PST3816								
PST3817								
PST3818								
PST3819								
PST3820								
PST3821								
PST3822								
PST3823								
PST3824								
PST3825								
PST3826								
PST3827								
PST3828								
PST3829								
PST3830								
PST3831								
PST3832								
PST3833				$V_{OUT} \leq 0.1V$			$-30^{\circ}C \leq$	
PST3834	$V_{OUT} \leq 0.1V$	0.55	0.70	$-30^{\circ}C \leq$	0.65	0.80	T_{OPT}	± 100
PST3835	$T_{OPT} = 25^{\circ}C$			T_{OPT}			$\leq 85^{\circ}C$	
PST3836				$\leq 85^{\circ}C$				
PST3837								
PST3838								
PST3839								
PST3840								
PST3841								
PST3842								
PST3843								
PST3844								
PST3845								
PST3846								
PST3847								
PST3848								
PST3849								
PST3850								
PST3851								
PST3852								
PST3853								
PST3854								
PST3855								
PST3856								
PST3857								
PST3858								
PST3859								
PST3860								

Measuring Circuit


(1)

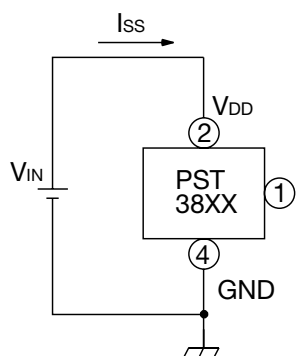


(2)

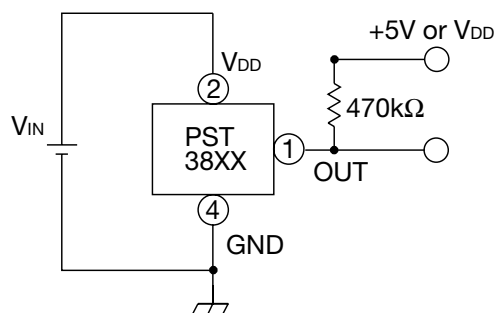


(3)

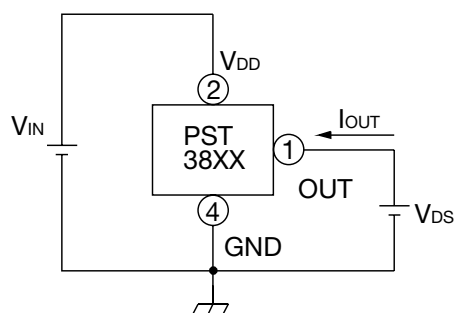

(4)

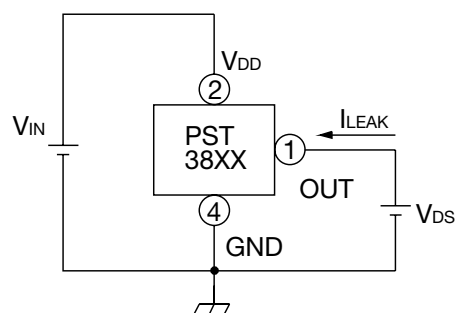


Application Circuits

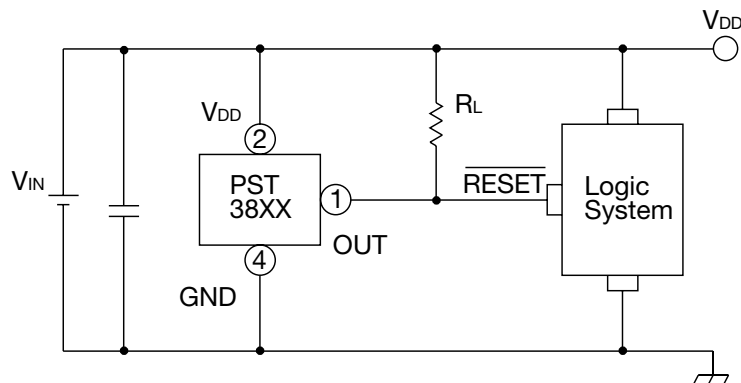


We shall not be liable for any trouble or damage caused by using this circuit.

In the event a problem which may affect industrial property or any other rights of us or a third party is encountered during the use of information described in these circuit, Mitsumi Electric Co., Ltd. shall not be liable for any such problem, nor grant a license therefor.

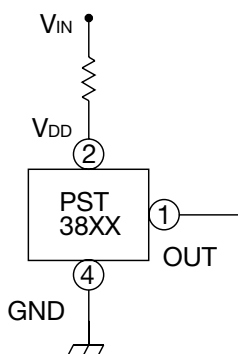


Please note that there is any possibility of circuit oscillation when resistance put in the line V_{IN} .

Timing Chart

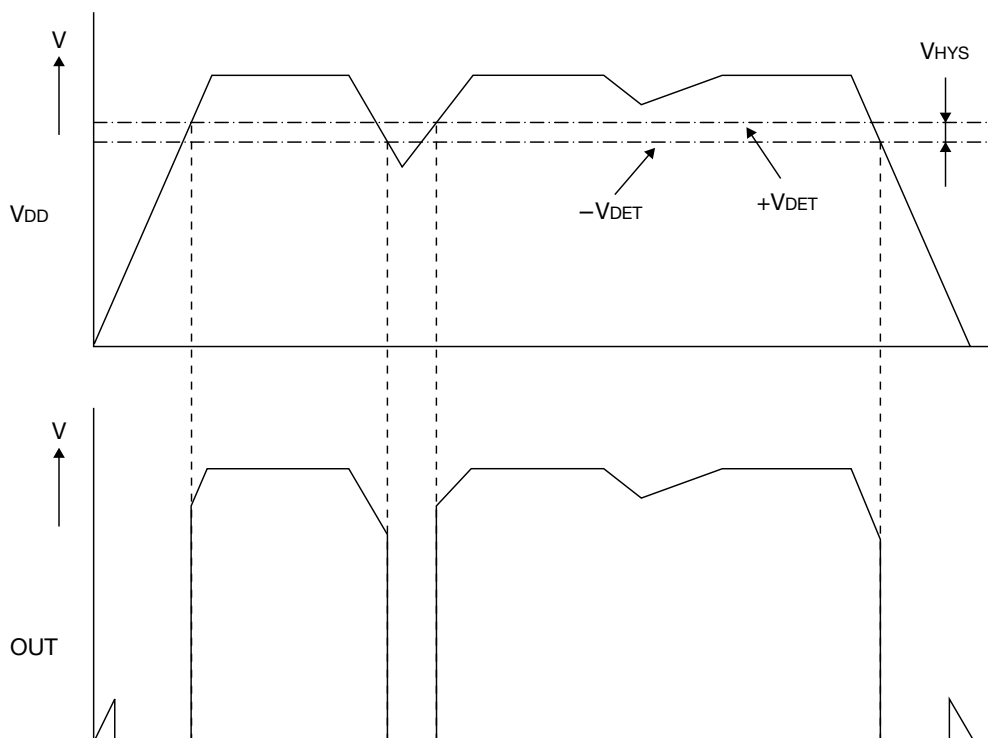


Characteristics PST3809 ($-V_{DET}=0.9V$)


Detecting voltage

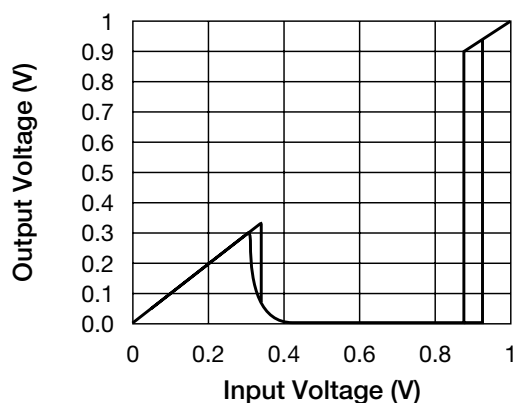


Supply Current

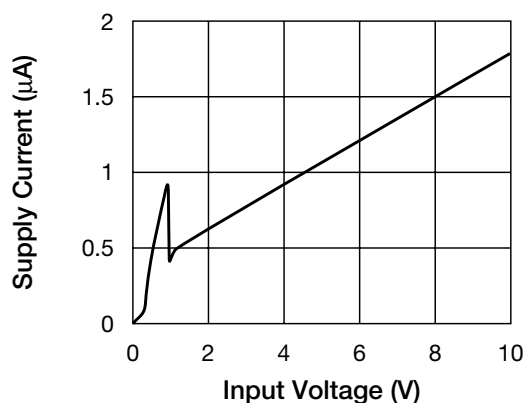


Detecting voltage vs temperature

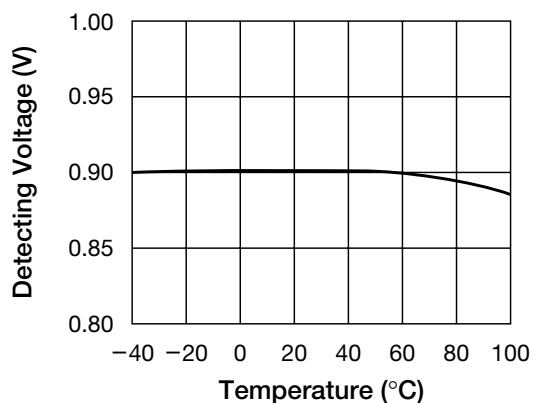


Hysteresis voltage vs temperature

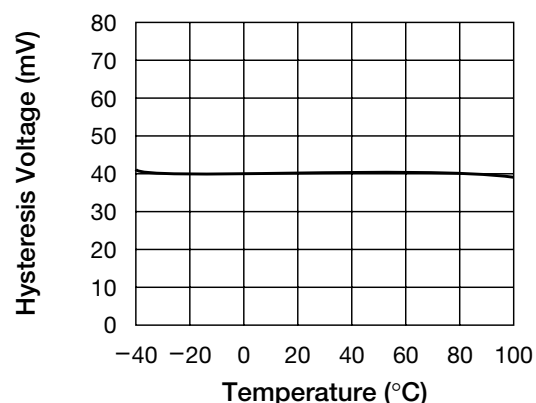

Output current 1 vs temperature

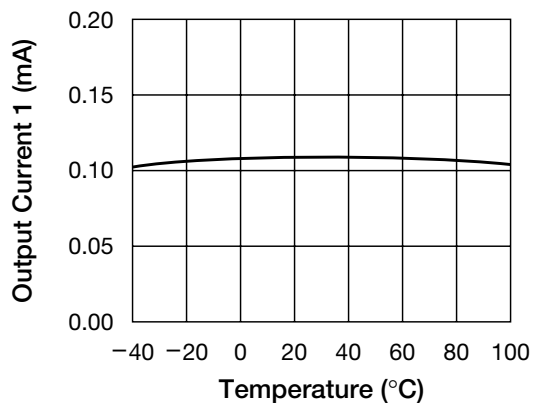


Output current 2 vs temperature

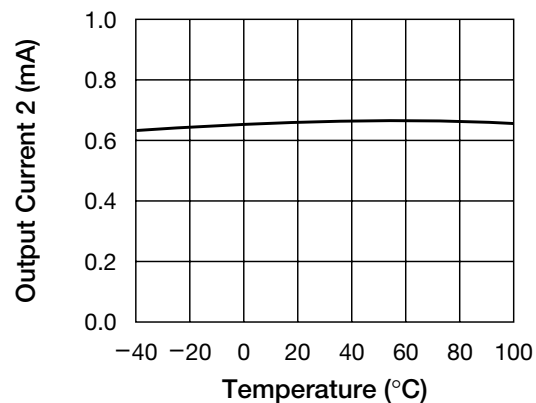


Note: These are typical characteristics.

Characteristics PST3828 ($-V_{DET}=2.8V$)


Detecting voltage

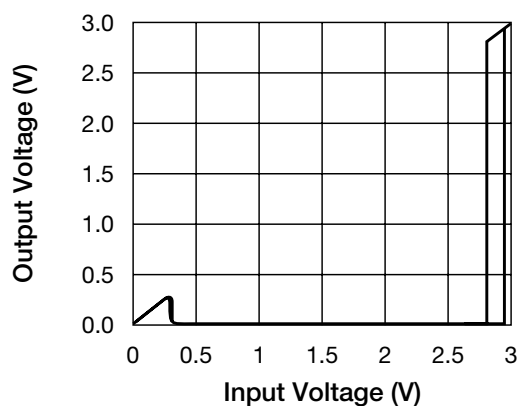


Supply current

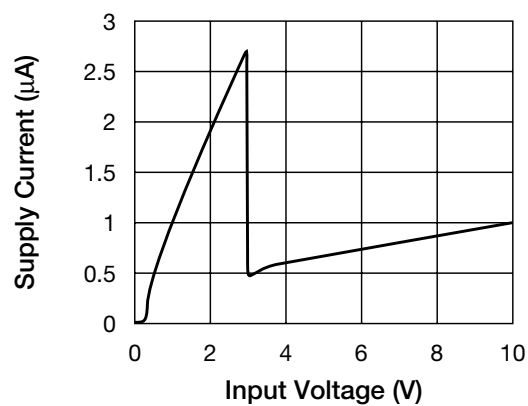


Detecting voltage vs temperature

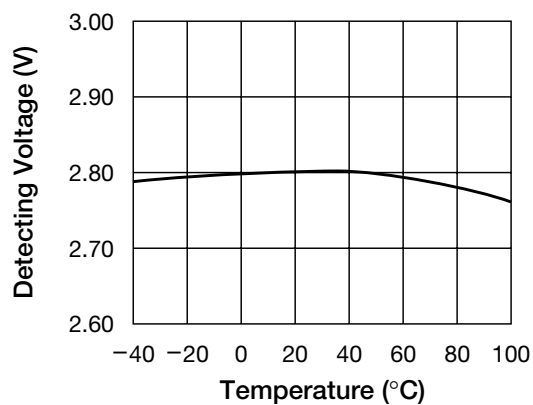


Hysteresis voltage vs temperature

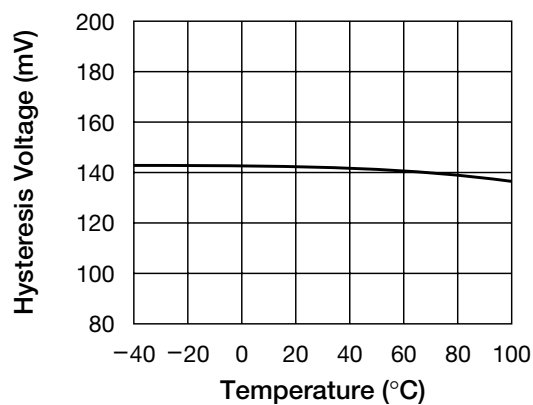

Output current 1 vs temperature

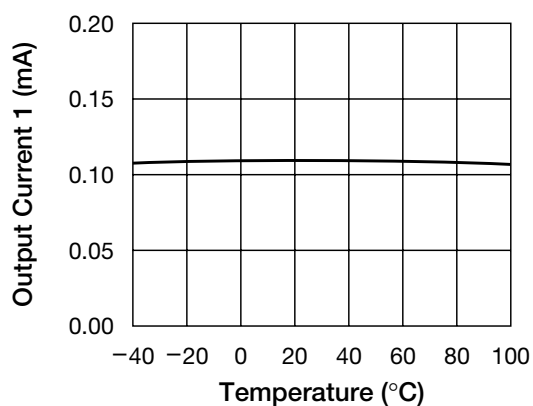


Output current 2 vs temperature

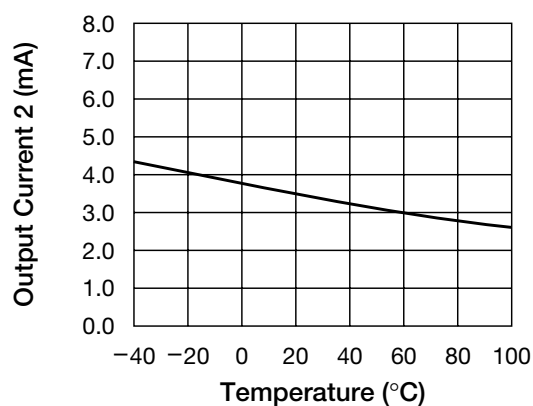


Note: These are typical characteristics.

Characteristics PST3846 ($-V_{DET}=4.6V$)


Detecting voltage

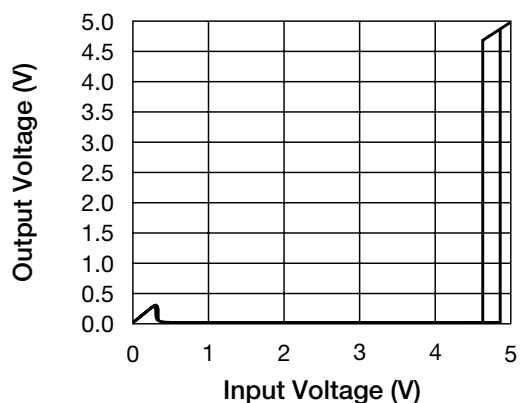


Supply current

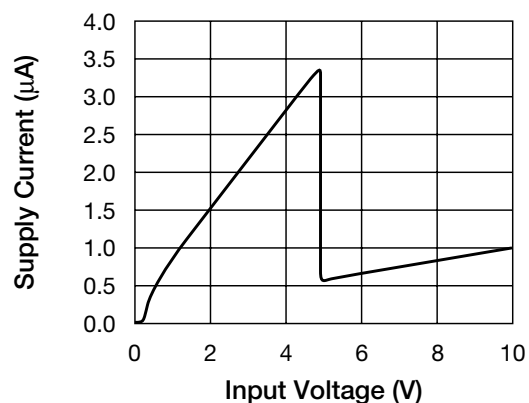


Detecting voltage vs temperature

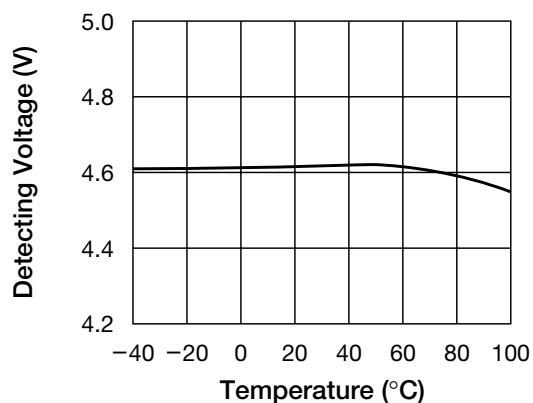


Hysteresis voltage vs temperature

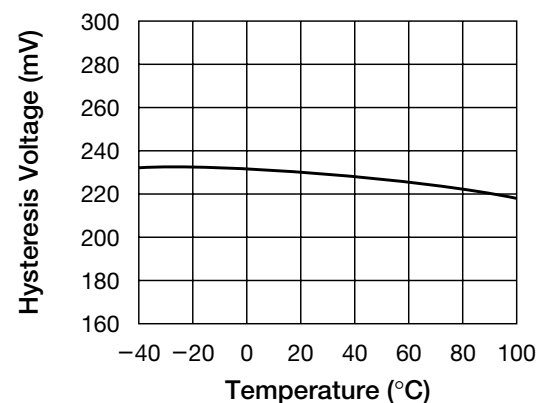

Output current 1 vs temperature

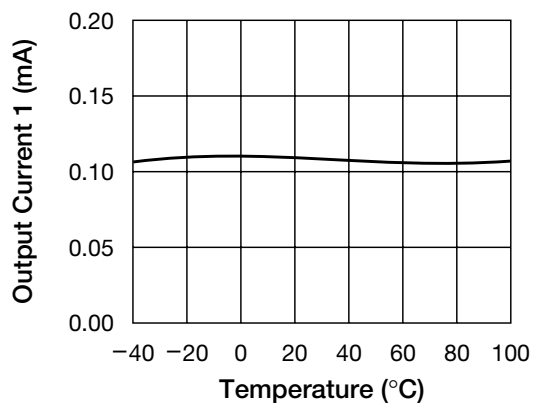

Output current 2 vs temperature

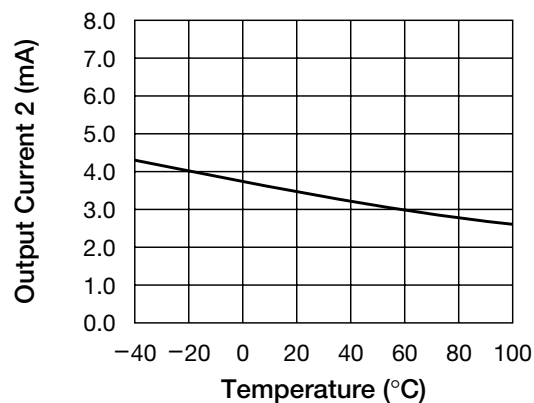

Note: These are typical characteristics.