

## EMC Components

### Common Mode Choke Coils for Signal Line SMD

## ACM Series

#### FEATURES

- Although greatly miniaturized, this wire-wound chip-type filter maintains the characteristics needed for a common-mode filter. Common-mode impedance is 1000Ω [at 100MHz], so this filter is greatly effective in supporting noise.
- Almost no affect upon even high speed signals since differential mode impedance is kept low.
- This series includes both 2-line and 3-line types. They are used for various types of circuits and noise.


#### APPLICATIONS

- Used for radiation noise suppression for any electronic devices.
- Used to counter common-mode noise affecting signals within high speed lines.
- USB line for personal computers and peripheral equipment.
- IEEE1394 line for personal computers, DVC, STB, etc.
- LVDS, panel link line for liquid crystal display panels.


#### SHAPES AND DIMENSIONS/CIRCUIT DIAGRAMS/ RECOMMENDED PC BOARD PATTERNS

##### 2-LINE TYPE

##### ACM2012-2P

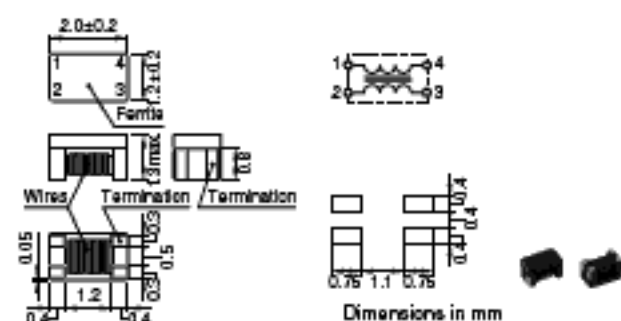

##### ACM2520-2P

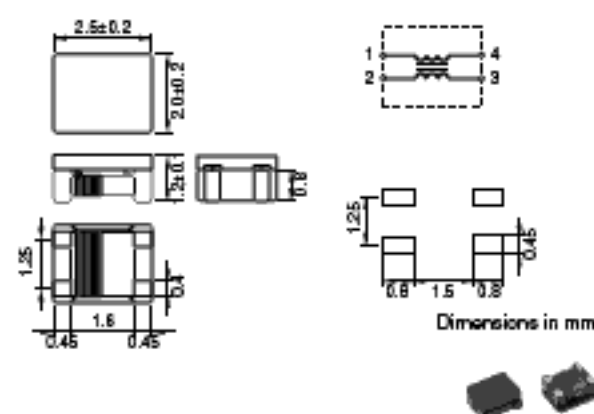

#### PRODUCT IDENTIFICATION

ACM	2012	-	900	-	2P	-	T
(1)	(2)	(3)	(4)	(5)			

- (1) Series name  
 (2) Dimensions L×W  
 2012: 2.0×1.2mm  
 (3) Impedance[at 100MHz]  
 900: 90Ω  
 (4) Number of line  
 2P:2-line  
 3P:3-line  
 (5) Packaging style  
 T: ø180mm reel taping  
 TL: ø330mm reel taping


#### TEMPERATURE RANGES

Operating	-25 to +85°C
-----------	--------------

#### PACKAGING STYLE AND QUANTITIES

Packaging style	Type	Reel	Quantity
Taping	ACM2012	ø180mm	2000 pieces/reel
		ø330mm	10000 pieces/reel
	ACM2520	ø180mm	2000 pieces/reel
		ø330mm	10000 pieces/reel
	ACM3225	ø180mm	1000 pieces/reel
		ø330mm	5000 pieces/reel
ACM4532	ø180mm	500 pieces/reel	
	ø330mm	2000 pieces/reel	

##### ACM3225-2P

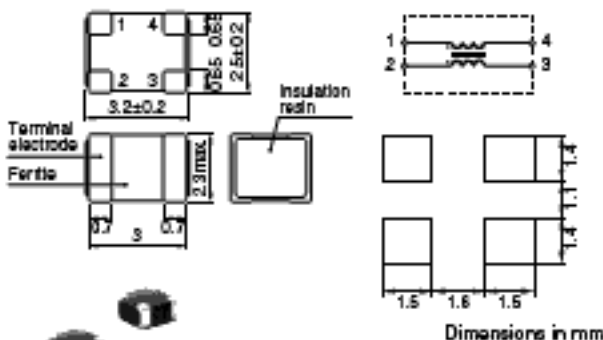

# EMC Components


## ACM Series

### Common Mode Choke Coils for Signal Line SMD


#### SHAPES AND DIMENSIONS/CIRCUIT DIAGRAMS/RECOMMENDED PC BOARD PATTERNS

##### 3-LINE TYPE

##### ACM2520-3P

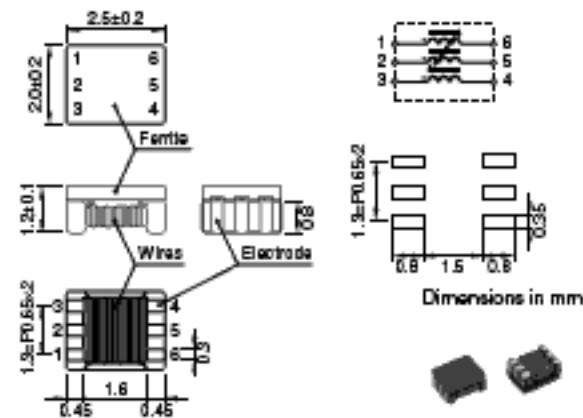

##### ACM4532-102-3P

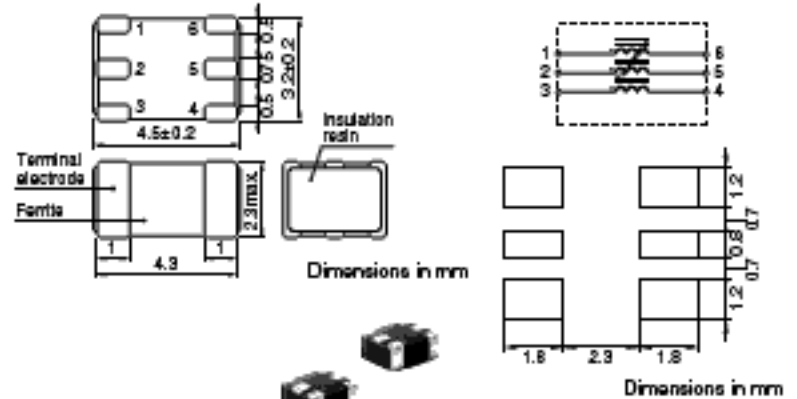

#### ELECTRICAL CHARACTERISTICS

Part No.	Impedance ( $\Omega$ )typ.[100MHz]	DC resistance ( $\Omega$ )max.[Per 1line]	Rated voltage Edc(V)max.	Rated current Idc(A)max.
<b>2-LINE</b>				
ACM2012-900-2P-□	90	0.19	50	0.4
ACM2012-121-2P-□	120	0.22	50	0.37
ACM2012-201-2P-□	200	0.25	50	0.35
ACM2012-361-2P-□	360	0.5	50	0.22
ACM2520-301-2P-□	300	0.35	20	0.4
ACM2520-451-2P-□	450	0.4	20	0.35
ACM2520-601-2P-□	600	0.45	20	0.3
ACM2520-102-2P-□	1000	0.9	20	0.2
ACM3225-600-2P-□	60	0.15	20	0.4
ACM3225-161-2P-□	160	0.2	20	0.35
ACM3225-271-2P-□	270	0.3	20	0.3
ACM3225-102-2P-□	1000	0.5	20	0.2
<b>3-LINE</b>				
ACM2520-601-3P-□	600	0.7	20	0.2
ACM2520-801-3P-□	800	1.8	20	0.15
ACM4532-102-3P-□	1000	0.6	20	0.2

□ : Packaging style (T: Taping [ $\phi$ 180mm reel], TL: Taping [ $\phi$ 330mm reel])

# EMC Components


# ACM Series

## Common Mode Choke Coils for Signal Line SMD


### TYPICAL ELECTRICAL CHARACTERISTICS

#### IMPEDANCE vs. FREQUENCY CHARACTERISTICS


ACM2012-900-2P




ACM2012-121-2P




ACM2012-201-2P




ACM2012-361-2P




ACM2520-301-2P




ACM2520-451-2P




ACM2520-601-2P




ACM2520-102-2P




ACM3225-800-2P




ACM3225-161-2P



ACM3225-271-2P




ACM3225-102-2P




### MEASURING CIRCUITS

#### 2-LINE

Common mode



Differential mode



# EMC Components


# ACM Series

## Common Mode Choke Coils for Signal Line SMD


### TYPICAL ELECTRICAL CHARACTERISTICS

#### IMPEDANCE vs. FREQUENCY CHARACTERISTICS


ACM2520-601-3P



ACM2520-801-3P



ACM4532-102-3P



#### MEASURING CIRCUITS

##### 3-LINE

