

500mA Low Dropout Positive Voltage Regulator

General Description

The RT9163 is a positive low dropout regulator designed for applications requiring low dropout performance at full rated current. The device is available in fixed output voltage of 3.3V, 3.5V, and 5.0V. The RT9163 provides excellent regulation over line, load, and temperature variations.

The other features include low dropout performance at a maximum of 1.4V at 500mA, fast transient response, internal current limiting, and thermal shutdown protection of the output devices. The RT9163 is a three-terminal regulator available in surface mount SOT-89, SOT-223, and TO-252 packages.

Applications

- 5V to 3.3V Linear Regulator
- Low Voltage Microcontroller, DSP... etc Power Supply
- Linear Regulator for LAN Card and CD-ROM






Ordering Information

RT9163-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Package type			
ZL	:	TO-92		
X	:	SOT-89		
XL	:	SOT-89, L Type		
L	:	TO-252		
G	:	SOT-223 Type I		
GL	:	SOT-223 Type II		
GT	:	SOT-223 Type III		
GF	:	SOT-223 Type IV		
Operating temperature range				
C:	Commercial standard			
Output voltage				
33	:	3.3V		
35	:	3.5V		
50	:	5.0V		

Features

- Low Dropout, Maximum 1.4V at 500mA
- Fast Transient Response
- $\pm 2\%$ Total Output Regulation
- 0.4% Line Regulation
- 0.4% Load Regulation
- TO-92, SOT-89, SOT-223, and TO-252 Packages


Pin Configurations

Part Number	Pin Configurations	
RT9163-□□CZL (Plastic TO-92)		TOP VIEW 1. VIN 2. GND 3. VOUT
RT9163-□□CX (Plastic SOT-89)		TOP VIEW 1. VOUT 2. GND (TAB) 3. VIN
RT9163-□□CXL (Plastic SOT-89)		TOP VIEW 1. GND 2. VIN (TAB) 3. VOUT
RT9163-□□CL (Plastic TO-252)		TOP VIEW 1. VOUT 2. GND (TAB) 3. VIN
RT9163-□□CG (Plastic SOT-223) Type I		TOP VIEW 1. VOUT 2. GND (TAB) 3. VIN
RT9163-□□CGL (Plastic SOT-223) Type II		TOP VIEW 1. VIN 2. GND (TAB) 3. VOUT
RT9163-□□CGT (Plastic SOT-223) Type III		TOP VIEW 1. GND 2. VOUT (TAB) 3. VIN
RT9163-□□CGF (Plastic SOT-223) Type IV		TOP VIEW 1. GND 2. VIN (TAB) 3. VOUT

Marking Information

Part Number	Marking
RT9163-33CZL	RTAJ
RT9163-35CZL	RTAK
RT9163-50CZL	RTA1
RT9163-33CX	A8
RT9163-35CX	A9
RT9163-50CX	AT
RT9163-33CXL	CK
RT9163-35CXL	CL
RT9163-50CXL	CM

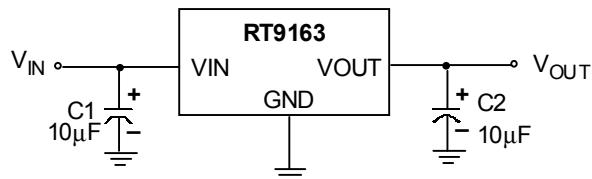
Typical Application Circuit



Pin Description

Pin Name	Pin Function
V_{OUT}	Output Voltage
GND	Ground
V_{IN}	Power Input

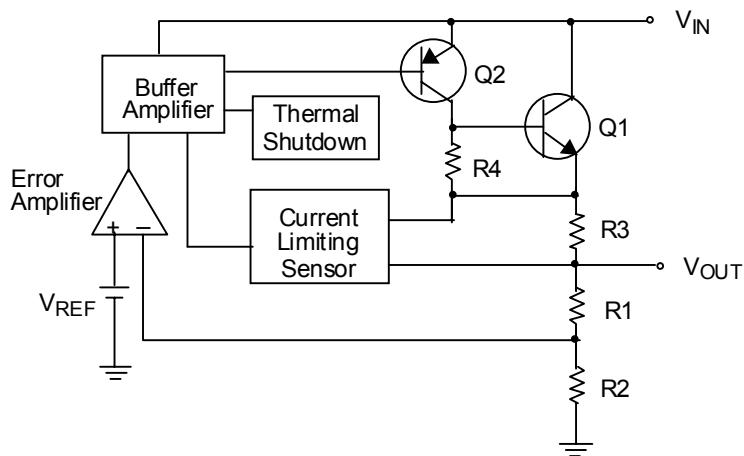Function Block Diagram



Absolute Maximum Ratings

• Input Voltage	15V
• Power Dissipation, P_D @ $T_A = 25^\circ\text{C}$	
TO-92	0.6W
SOT-89	0.5W
• Package Thermal Resistance	
TO-92, θ_{JA}	160°C/W
SOT-89, θ_{JC}	100°C/W
SOT-89, θ_{JA}	300°C/W
SOT-223, θ_{JC}	15°C/W
SOT-223, θ_{JA}	60°C/W
TO-252, θ_{JC}	15°C/W
TO-252, θ_{JA}	56°C/W
• Operating Junction Temperature Range	-40°C to 125°C
• Storage Temperature Range	-65°C to 150°C


Electrical Characteristics

($V_{IN} = 5\text{V}$, $T_A = 25^\circ\text{C}$, unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Units	
Output Voltage ⁽¹⁾	RT9163-33	V_{OUT}	3.235	3.300	3.365	V	
	RT9163-35		3.430	3.500	3.570		
	RT9163-50		$V_{IN} = 7\text{A}$	4.900	5.000	5.100	
Line Regulation ⁽¹⁾	RT9163-33	ΔV_{LINE}	$V_{IN} = 5\text{V} \sim 15\text{V}$	--	0.1	0.4	%
	RT9163-35		$V_{IN} = 7\text{V} \sim 15\text{V}$	--	0.1	0.4	
	RT9163-50						
Load Regulation ⁽¹⁾	ΔV_{LOAD}	$I_L = 0 \sim 500\text{mA}$	--	0.2	0.4	%	
Dropout Voltage ⁽²⁾	V_{DROP}	$\Delta V_{OUT} = 1\%$	--	1.3	1.4	V	
Current Limit	I_{LIMIT}	Load = 1Ω	550	--	--	mA	
Quiescent Current	I_Q		--	4.5	8	mA	
Temperature Coefficient	T_C		--	0.005	--	%/°C	
Temperature Stability	T_S		--	0.5	--	%	
RMS Output Noise ⁽³⁾			--	0.003	--	%/ V_{OUT}	


Notes:

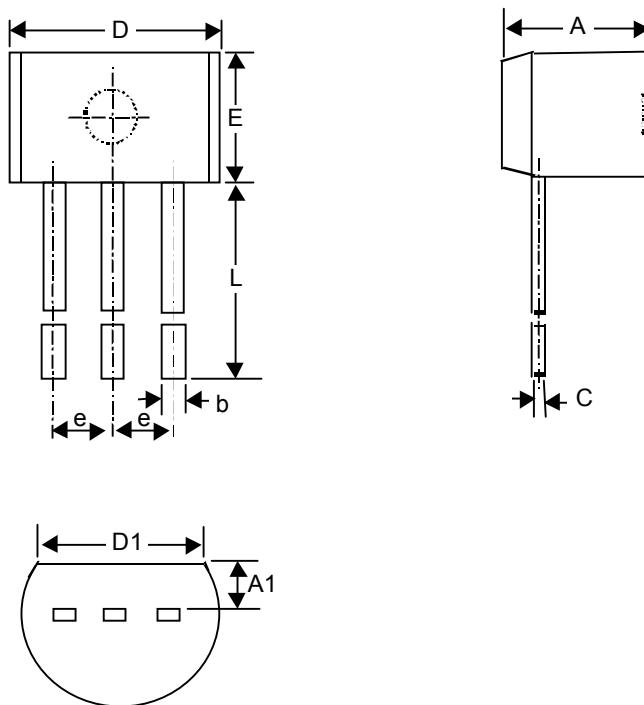- (1) Low duty cycle pulse tested with Kelvin connections.
- (2) Dropout voltage is defined as the input to output differential at which the output voltage drops 100mV below the value measured with a 1V differential.
- (3) Bandwidth of 10 Hz to 10 kHz.

Package Information


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	3.175	4.191	0.125	0.165
A1	1.143	1.372	0.045	0.054
b	0.406	0.533	0.016	0.021
C	0.406	0.533	0.016	0.021
D	4.445	5.207	0.175	0.205
D1	3.429	--	0.135	--
E	4.318	5.334	0.170	0.210
e	1.143	1.397	0.045	0.055
L	12.700	--	0.500	--

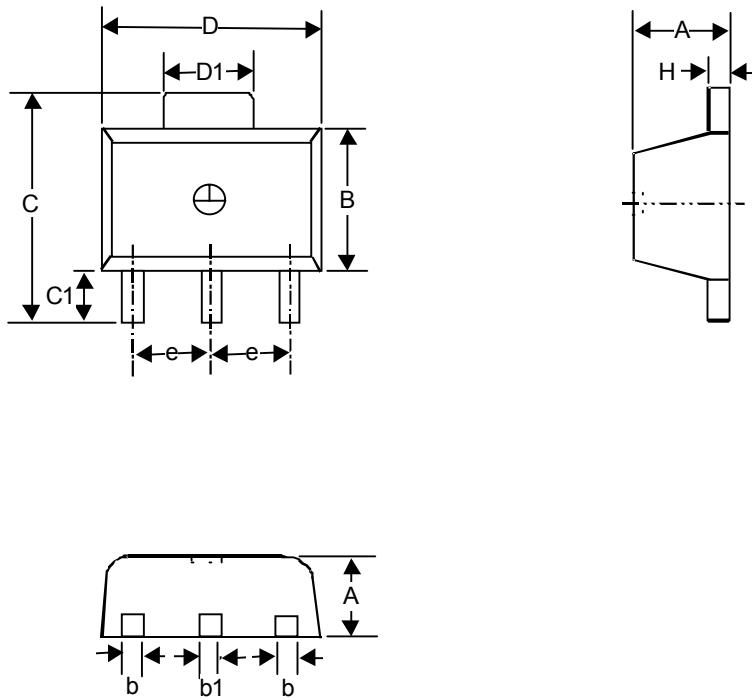3-Lead TO-92 Package




Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.397	1.600	0.055	0.063
b	0.356	0.483	0.014	0.019
B	2.388	2.591	0.094	0.102
b1	0.406	0.533	0.016	0.021
C	--	4.242	--	0.167
C1	0.787	1.194	0.031	0.047
D	4.394	4.597	0.173	0.181
D1	1.397	1.753	0.055	0.069
e	1.448	1.549	0.057	0.061
H	0.355	0.432	0.014	0.017

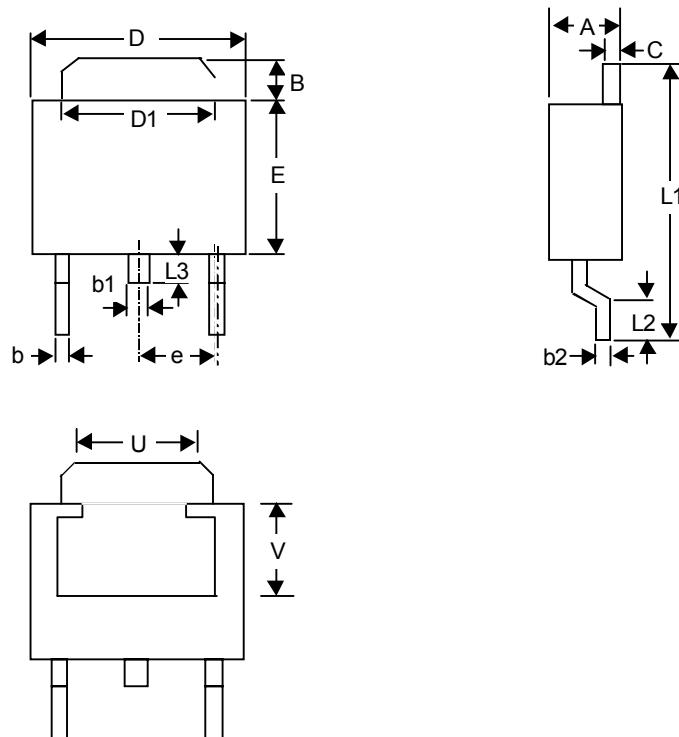3-Lead SOT-89 Surface Mount



Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	2.184	2.388	0.086	0.094
B	0.889	2.032	0.035	0.080
b	0.508	0.889	0.020	0.035
b1	1.016 Ref.		0.040 Ref.	
b2	0.457	0.584	0.018	0.023
C	0.457	0.584	0.018	0.023
D	6.350	6.731	0.250	0.265
D1	5.207	5.461	0.205	0.215
E	5.334	6.223	0.210	0.245
e	2.108	2.438	0.083	0.096
L1	9.398	10.414	0.370	0.410
L2	0.508	--	0.020	--
L3	0.635	1.016	0.025	0.040
U	3.810 Ref.		0.150 Ref.	
V	3.048 Ref.		0.120 Ref.	

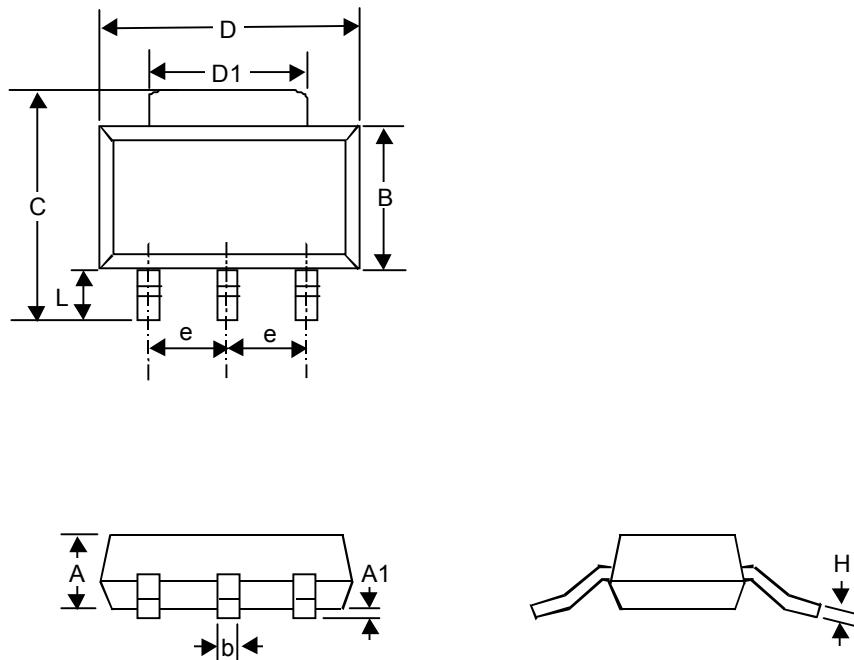3-Lead TO-252 Plastic Surface Mount Package



Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	--	1.803	--	0.071
A1	0.020	0.100	0.0008	0.0047
b	0.610	0.787	0.024	0.031
B	3.302	3.708	0.130	0.146
C	6.706	7.290	0.264	0.287
D	6.299	6.706	0.248	0.264
D1	2.896	3.150	0.114	0.124
e	2.261	2.362	0.089	0.093
H	0.229	0.330	0.009	0.013
L	0.914	--	0.036	--

3-Lead SOT-223 Plastic Surface Mount