

SANYO	No.5046	2SC5230
		NPN Epitaxial Planar Silicon Transistor VHF to UHF Wide-Band Low-Noise Amp Applications

Features

- Low noise : $NF = 1.0\text{dB typ (} f = 1\text{GHz)}$.
- High gain : $|S_{21e}|^2 = 10.5\text{dB typ (} f = 1\text{GHz)}$.
- High cutoff frequency : $f_T = 6.5\text{GHz typ}$.

Absolute Maximum Ratings at $T_a = 25^\circ\text{C}$

			unit
Collector-to-Base Voltage	V_{CB0}	20	V
Collector-to-Emitter Voltage	V_{CEO}	10	V
Emitter-to-Base Voltage	V_{EBO}	2	V
Collector Current	I_C	70	mA
Collector Dissipation	P_C	400	mW
Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature	T_{stg}	-55 to +150	$^\circ\text{C}$

Electrical Characteristics at $T_a = 25^\circ\text{C}$

			min	typ	max	unit
Collector Cutoff Current	I_{CB0}	$V_{CB} = 10\text{V}, I_E = 0$			1.0	μA
Emitter Cutoff Current	I_{EBO}	$V_{EB} = 1\text{V}, I_C = 0$			10	μA
DC Current Gain	h_{FE}	$V_{CE} = 5\text{V}, I_C = 20\text{mA}$	60*		270*	
Gain-Bandwidth Product	f_T	$V_{CE} = 5\text{V}, I_C = 20\text{mA}$	4.5	6.5		GHz
Output Capacitance	C_{ob}	$V_{CB} = 10\text{V}, f = 1\text{MHz}$		0.85	1.3	pF
Reverse Transfer Capacitance	C_{re}	$V_{CB} = 10\text{V}, f = 1\text{MHz}$		0.55		pF
Forward Transfer Gain	$ S_{21e} ^2$	$V_{CE} = 5\text{V}, I_C = 20\text{mA}, f = 1\text{GHz}$	8	10.5		dB
Noise Figure	NF	$V_{CE} = 5\text{V}, I_C = 7\text{mA}, f = 1\text{GHz}$		1.0	1.8	dB


* : The 2SC5230 is classified by 20mA h_{FE} as follows :

60	D	120	90	E	180	135	F	270
----	---	-----	----	---	-----	-----	---	-----

h_{FE} rank : D, E, F

Package Dimensions 2004B

(unit : mm)

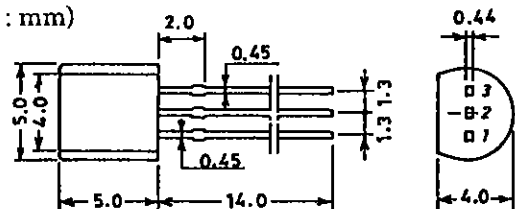

JEDEC : TO-92

EIAJ : SC-43

SANYO : NP








1 : Base

2 : Emitter

3 : Collector


SANYO Electric Co., Ltd. Semiconductor Business Headquarters

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110 JAPAN

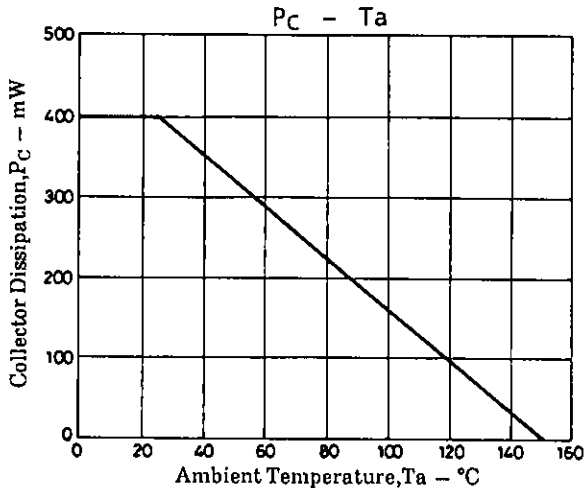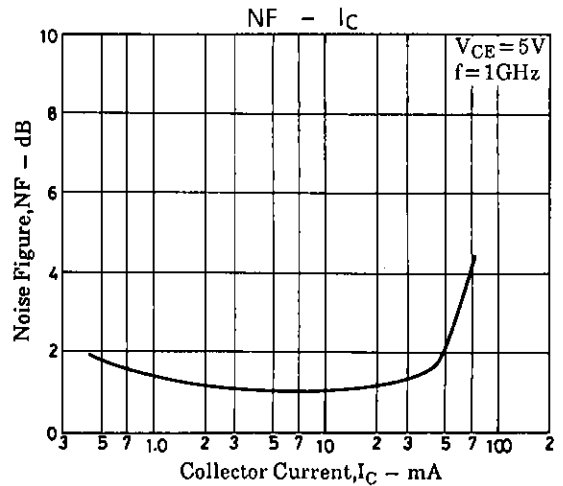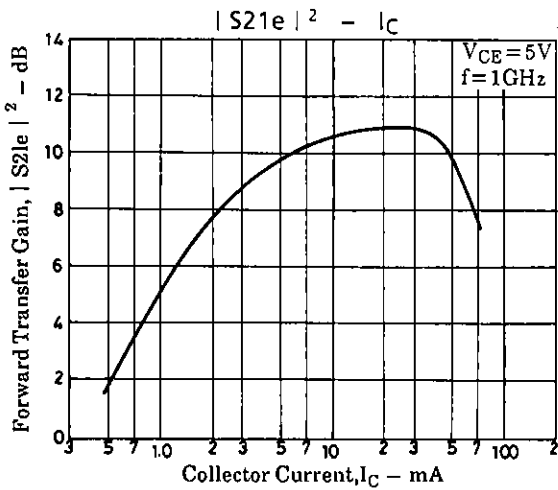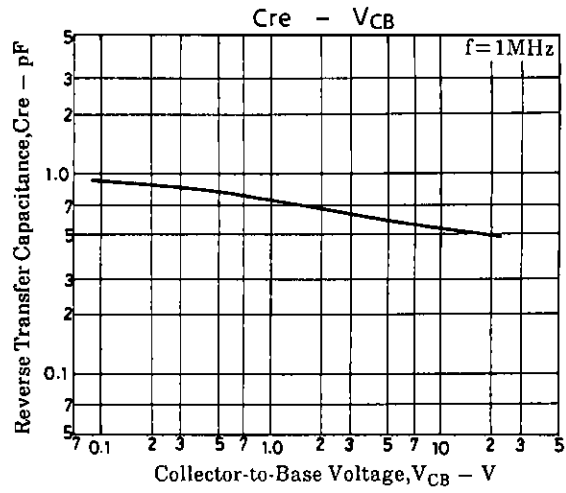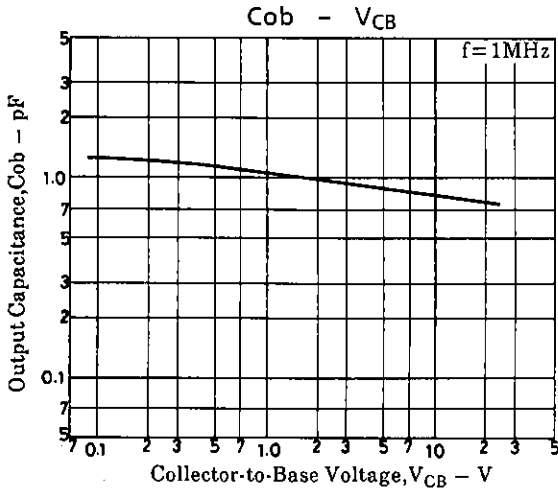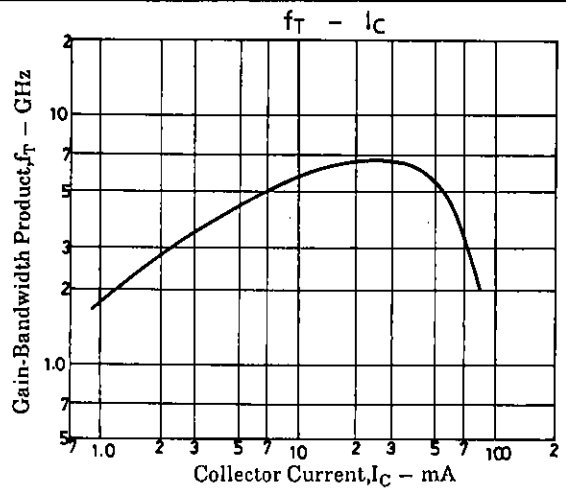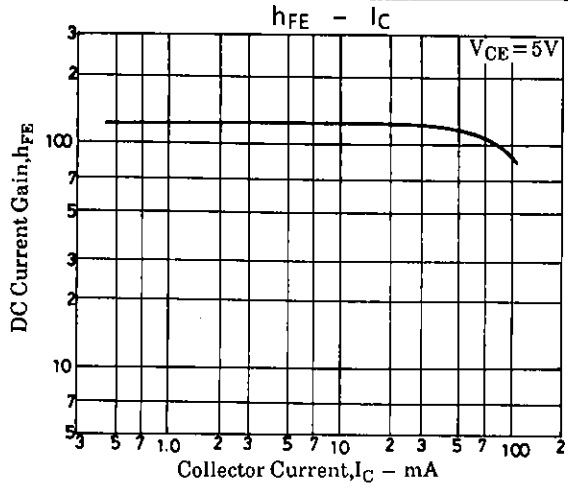


S Parameter


f = 100MHz, 200 to 2000MHz (200MHz step)

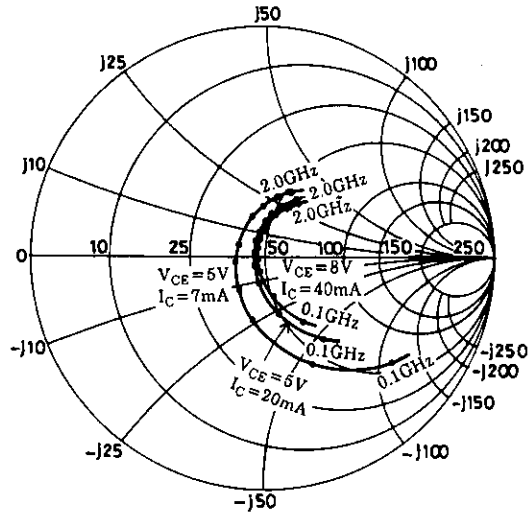


f = 100MHz, 200 to 2000MHz (200MHz step)

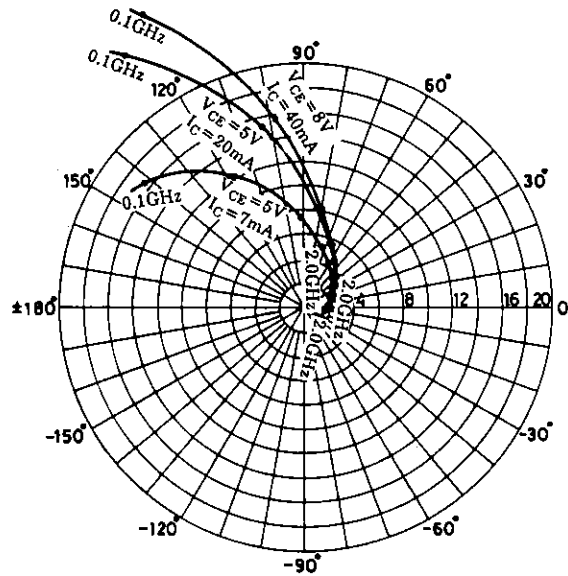

f = 100MHz, 200 to 2000MHz (200MHz step)

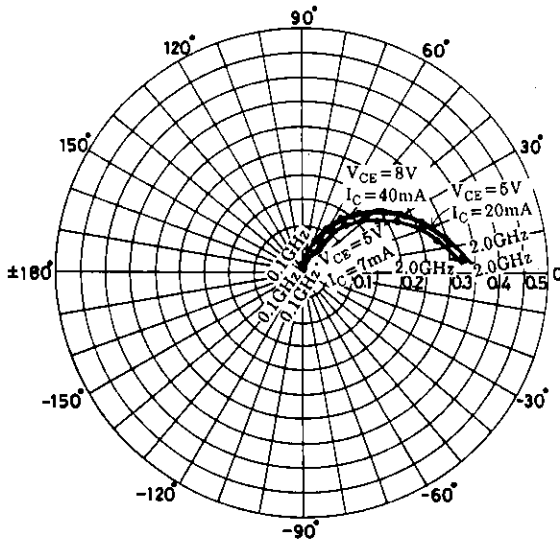

f = 100MHz, 200 to 2000MHz (200MHz step)

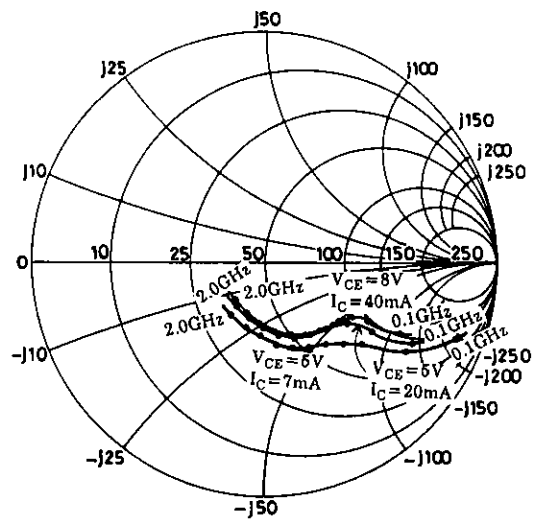

■ No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.

■ Anyone purchasing any products described or contained herein for an above-mentioned use shall:

- ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
- ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.

■ Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

S Parameter (Common emitter)

 $V_{CE} = 5V, I_C = 7mA, Z_0 = 50\Omega$

Freq (MHz)	S ₁₁	∠S ₁₁	S ₂₁	∠S ₂₁	S ₁₂	∠S ₁₂	S ₂₂	∠S ₂₂
100	0.706	-39.4	16.564	141.8	0.029	70.7	0.866	-22.2
200	0.504	-65.6	12.172	117.3	0.048	62.0	0.699	-32.9
400	0.272	-98.9	7.268	90.7	0.076	56.7	0.535	-40.9
600	0.167	-127.5	5.116	73.6	0.105	52.5	0.470	-46.9
800	0.116	-167.7	3.946	59.5	0.134	47.7	0.429	-54.5
1000	0.118	154.0	3.253	47.0	0.163	41.7	0.403	-63.3
1200	0.141	124.4	2.750	35.1	0.194	35.3	0.379	-72.7
1400	0.182	104.9	2.424	23.9	0.224	28.5	0.354	-83.0
1600	0.222	89.6	2.188	12.9	0.255	21.3	0.321	-94.3
1800	0.264	77.4	1.985	2.0	0.285	13.9	0.293	-107.3
2000	0.301	66.8	1.830	-8.6	0.315	6.2	0.267	-123.1

 $V_{CE} = 5V, I_C = 20mA, Z_0 = 50\Omega$

Freq (MHz)	S ₁₁	∠S ₁₁	S ₂₁	∠S ₂₁	S ₁₂	∠S ₁₂	S ₂₂	∠S ₂₂
100	0.431	-53.7	25.126	125.0	0.024	71.2	0.704	-29.4
200	0.251	-75.2	15.206	103.1	0.040	68.6	0.533	-34.1
400	0.110	-100.5	8.172	82.6	0.073	65.2	0.433	-37.2
600	0.051	-137.1	5.608	68.5	0.107	59.3	0.395	-43.5
800	0.046	146.2	4.281	56.4	0.141	52.6	0.367	-52.2
1000	0.077	113.8	3.529	45.1	0.174	45.3	0.345	-62.1
1200	0.112	97.4	2.973	34.1	0.207	37.7	0.324	-72.4
1400	0.156	86.8	2.615	23.5	0.240	29.8	0.298	-83.8
1600	0.194	77.9	2.349	13.3	0.273	21.7	0.263	-96.2
1800	0.239	68.1	2.125	2.7	0.304	13.6	0.235	-110.7
2000	0.283	60.6	1.953	-7.5	0.334	5.1	0.209	-128.6

 $V_{CE} = 8V, I_C = 40mA, Z_0 = 50\Omega$

Freq (MHz)	S ₁₁	∠S ₁₁	S ₂₁	∠S ₂₁	S ₁₂	∠S ₁₂	S ₂₂	∠S ₂₂
100	0.325	-59.7	27.400	118.6	0.021	72.3	0.638	-28.9
200	0.174	-77.9	15.667	98.7	0.037	71.6	0.498	-30.1
400	0.068	-103.4	8.249	80.2	0.071	67.7	0.430	-33.2
600	0.026	-160.0	5.633	67.1	0.104	61.4	0.401	-39.8
800	0.050	117.9	4.288	55.2	0.137	54.4	0.377	-49.0
1000	0.081	103.3	3.524	44.3	0.170	46.8	0.357	-59.1
1200	0.120	91.3	2.981	33.8	0.204	39.0	0.340	-69.6
1400	0.160	82.1	2.616	23.3	0.236	31.0	0.312	-80.9
1600	0.195	73.4	2.349	13.2	0.269	23.0	0.279	-93.1
1800	0.237	65.5	2.131	3.0	0.300	14.7	0.250	-107.3
2000	0.280	57.8	1.962	-7.3	0.331	6.3	0.223	-124.4