

SONY**CX20017****Dual 16 bit, 44 kHz, Multiplexed D/A****Description**

The CX20017 is a 16 bit D/A converter IC for PCM audio using an integration system. Analog signals can be regenerated from 16 bit digital signals by adding an integrator, an analog switch, and a low-pass filter outside the IC.

The following circuits are included as additional functions:

- Two channels for integral current output and discharge signal output.
- Level shift circuit for direct interface with TTLs and MOS LSIs.
- Analog switch drive circuits, etc.

Functions

- 16 bit D/A converter.
- Clock buffer.
- TTL-ECL interface circuit.
- Discharge drive circuit.
- Analog switch drive circuit.

Construction

Silicon monolithic integrated circuit.

Absolute Maximum Ratings (Ta=25°C)


• Power supply voltage:	VCC to VEE	12	V
• Circuit current:	ICC	20	mA
	IEE	-120	mA
• Operating temperature:	Topr	-10 to +75	°C
• Storage temperature:	Tstg	-50 to +150	°C
• Allowable power dissipation:	PD	2.1	W

Recommended Operating Conditions

VCC	5 ± 0.25	V
VEE	-5 ± 0.25	V

Package Outline

Unit: mm

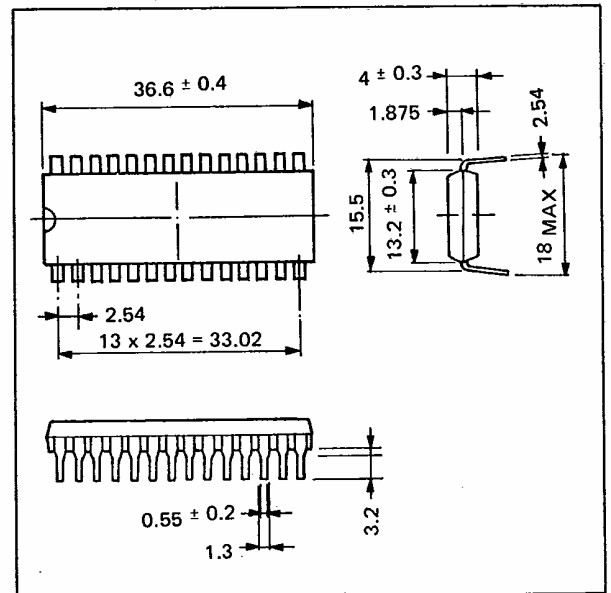

SONY reserves the right to change products and specifications without notice.

This information does not convey any license under patent rights of SONY corporation or others.