



# SAW Components

Data Sheet B4167





SAW Components

B4167

Low-Loss Filter for Mobile Communication

1842,5 MHz

Data Sheet




Ceramic package **DCC6D**

**Features**

- Low-loss RF filter for mobile telephone PCN systems, receive path
- Low amplitude ripple
- Usable passband 75 MHz
- Unbalanced to balanced operation
- Impedance transformation from 50Ω to 200Ω
- Package for **S**urface **M**ounted **T**echnology (**SMT**)
- Ceramic SMD package

**Terminals**


- Ni, gold-plated

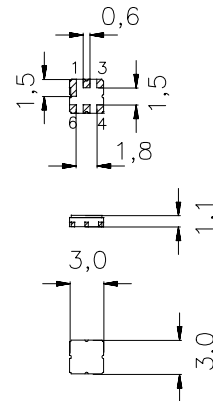

Dimensions in mm, approx. weight 0,037 g

**Pin configuration**

- |         |                   |
|---------|-------------------|
| 2       | Input, unbalanced |
| 4, 6    | Output, balanced  |
| 1, 3    | Input ground      |
| 1, 3, 5 | To be grounded    |

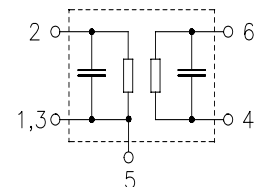

Type	Ordering code	Marking and Package according to	Packing according to
B4167	B39182-B4167-U510	C61157-A7-A68	F61074-V8089-Z000

Electrostatic Sensitive Device (ESD)

**Maximum ratings**

Operable temperature range	$T$	- 20 / + 75	°C	source/load impedance 50/200 Ω peak power of GSM signal, duty cycle 2 : 8
Storage temperature range	$T_{stg}$	- 40 / + 85	°C	
DC voltage	$V_{DC}$	5	V	
Input power max.				
1710 ... 1785 MHz	$P_{IN}$	11	dBm	
1805 ... 1880 MHz	$P_{IN}$	11	dBm	
elsewhere	$P_{IN}$	0	dBm	



**SAW Components**

**B4167**

**Low-Loss Filter for Mobile Communication**

**1842,5 MHz**

**Data Sheet**



**Characteristics**

Operating Temperature Range:  $T = +25 \pm 2 \text{ }^\circ\text{C}$   
 Terminating source impedance:  $Z_S = 50\Omega$  (unbalanced)  
 Terminating load impedance:  $Z_L = 200\Omega \parallel 22 \text{ nH}$  (balanced)

			<b>min.</b>	<b>typ.</b>	<b>max.</b>	
<b>Center frequency</b>	$f_C$		—	1842,5	—	MHz
<b>Maximum insertion attenuation</b>	$\alpha_{\max}$	1805,0 ... 1880,0 MHz	—	2,0	3,5	dB
<b>Amplitude ripple (p-p)</b>	$\Delta\alpha$	1805,0 ... 1880,0 MHz	—	0,9	2,0	dB
<b>Input VSWR</b>		1805,0 ... 1880,0 MHz	—	1,8	2,3	
<b>Output VSWR</b>		1805,0 ... 1880,0 MHz	—	1,8	2,3	
<b>Output amplitude balance (<math> S_{31}/S_{21} </math>)</b>		1805,0 ... 1880,0 MHz	-1,5	-1,1 / +0,6	1,5	dB
<b>Output phase balance (<math>\phi(S_{31})-\phi(S_{21})+180^\circ</math>)</b>		1805,0 ... 1880,0 MHz	-12	+/- 6	12	°
<b>Attenuation</b>	$\alpha$					
		0,0 ... 1000,0 MHz	40	50	—	dB
		1000,0 ... 1550,0 MHz	30	40	—	dB
		1550,0 ... 1705,0 MHz	25	28	—	dB
		1705,0 ... 1785,0 MHz	12	18	—	dB
		1920,0 ... 1980,0 MHz	12	17	—	dB
		1980,0 ... 2010,0 MHz	18	22	—	dB
		2010,0 ... 2500,0 MHz	20	26	—	dB
		2500,0 ... 3840,0 MHz	25	35	—	dB
		3840,0 ... 6000,0 MHz	20	32	—	dB



**SAW Components**

**B4167**

**Low-Loss Filter for Mobile Communication**

**1842,5 MHz**

Data Sheet




**Characteristics**

Operating Temperature Range:  $T = -10$  to  $+80^{\circ}\text{C}$   
 Terminating source impedance:  $Z_S = 50\Omega$  (unbalanced)  
 Terminating load impedance:  $Z_L = 200\Omega$  (balanced) ||  $22\text{ nH}$


			min.	typ.	max.	
<b>Center frequency</b>	$f_C$		—	1842,5	—	MHz
<b>Maximum insertion attenuation</b>	$\alpha_{\max}$	1805,0 ... 1880,0 MHz	—	2,5	4,0	dB
<b>Amplitude ripple (p-p)</b>	$\Delta\alpha$	1805,0 ... 1880,0 MHz	—	1,4	2,5	dB
<b>Input VSWR</b>		1805,0 ... 1880,0 MHz	—	1,8	2,4	
<b>Output VSWR</b>		1805,0 ... 1880,0 MHz	—	1,8	2,4	
<b>Output amplitude balance (<math> S_{31}/S_{21} </math>)</b>		1805,0 ... 1880,0 MHz	-1,5	-1,1 / +0,6	1,5	dB
<b>Output phase balance (<math>\phi(S_{31})-\phi(S_{21})+180^{\circ}</math>)</b>		1805,0 ... 1880,0 MHz	-15	+/- 6	15	$^{\circ}$
<b>Attenuation</b>	$\alpha$	0,0 ... 1000,0 MHz	40	50	—	dB
		1000,0 ... 1550,0 MHz	30	40	—	dB
		1550,0 ... 1705,0 MHz	25	28	—	dB
		1705,0 ... 1785,0 MHz	10	15	—	dB
		1920,0 ... 1980,0 MHz	10	17	—	dB
		1980,0 ... 2010,0 MHz	18	22	—	dB
		2010,0 ... 2500,0 MHz	20	26	—	dB
		2500,0 ... 3840,0 MHz	25	35	—	dB
		3840,0 ... 6000,0 MHz	20	32	—	dB



Transfer function

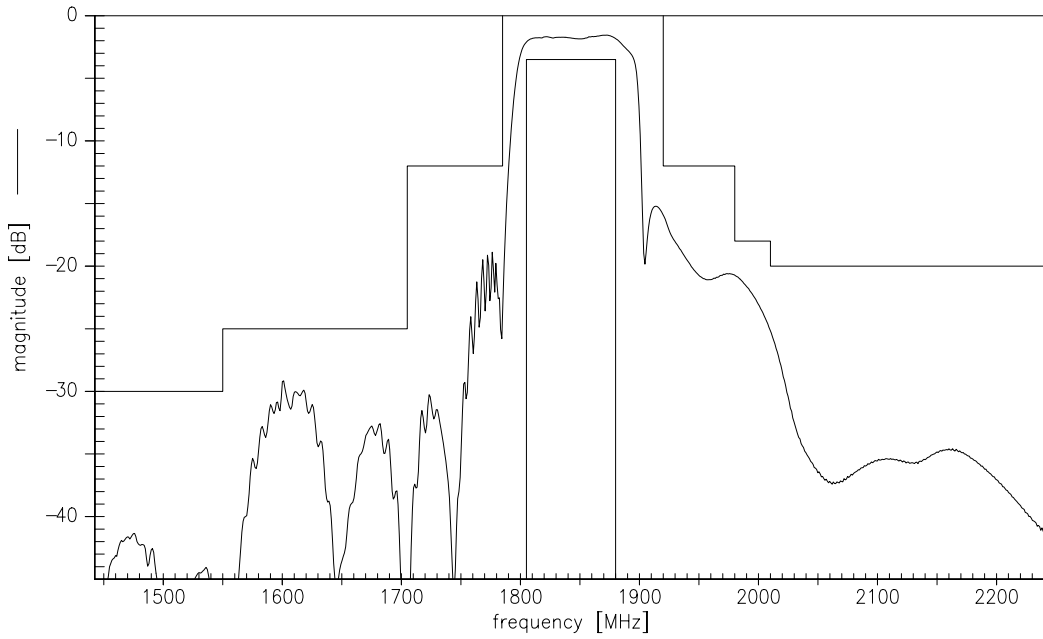

Transfer function (wide band)

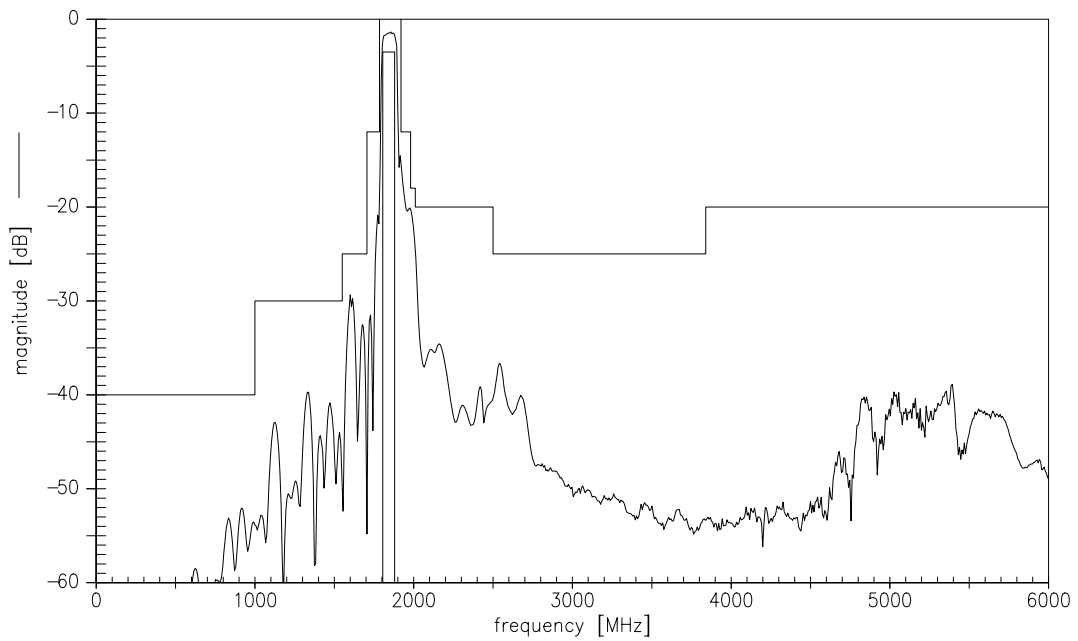



**SAW Components**

**B4167**

**Low-Loss Filter for Mobile Communication**

**1842,5 MHz**

Data Sheet



**Published by EPCOS AG**

**Surface Acoustic Wave Components Division, OFW E MF**

**P.O. Box 80 17 09, D-81617 München**

© EPCOS AG 1999. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved.

For questions on technology, prices and delivery please contact the sales offices of EPCOS AG or the international representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.