

- ◇ STRUCTURE Silicon Monolithic Integrated Circuit
- ◇ PRODUCT Microwire BUS 2Kbit(128 × 16bit) EEPROM
- ◇ PART NUMBER **BR93A56-W Series**

| PART NUMBER | PACKAGE |
|--------------|---------|
| BR93A56F-W | SOP8 |
| BR93A56RF-W | SOP8 |
| BR93A56FJ-W | SOP-J8 |
| BR93A56RFJ-W | SOP-J8 |

- ◇ FEATURES Microwire BUS EEPROM
Wide operating supply voltage range(2.5V~5.5V)
1,000,000 erase/write cycles endurance

◇ ABSOLUTE MAXIMUM RATING (Ta=25°C)

| Parameter | Symbol | Rating | Unit |
|-----------------------|--------|-----------------------|------|
| Supply Voltage | Vcc | -0.3~6.5 | V |
| Power Dissipation | Pd | 450 (BR93A56F-W) *1 | mW |
| | | 450 (BR93A56RF-W) *2 | |
| | | 450 (BR93A56FJ-W) *3 | |
| | | 450 (BR93A56RFJ-W) *4 | |
| Storage Temperature | Tstg | -65~125 | °C |
| Operating Temperature | Topr | -40~105 | °C |
| Terminal Voltage | — | -0.3~Vcc+0.3 | V |

* Degradation is done at 4.5mW/°C (*1,*2,*3,*4) for operation above 25°C

◇ RECOMMENDED OPERATING CONDITION

| Parameter | Symbol | Rating | Unit |
|----------------|--------|---------|------|
| Supply Voltage | Vcc | 2.5~5.5 | V |
| Input Voltage | VIN | 0~Vcc | V |

Status of this document

The Japanese version of this document is the formal specification.

A customer may use this translation version only for a reference to help reading the formal version.

If there are any differences in translation version of this document, formal version takes priority.

◇ MEMORY CELL CHARACTERISTICS (Vcc=2.5~5.5V)

| Parameter | Specification | Unit | Test Condition | | |
|----------------------|---------------|------|----------------|--------|------------|
| | | | | Min. | Typ. |
| Erase/Write Cycle *1 | 1,000,000 | - | - | Cycles | Ta ≤ 25°C |
| | 100,000 | - | - | Cycles | Ta ≤ 105°C |
| Data Retention *1 | 40 | - | - | Years | Ta ≤ 25°C |
| | 10 | - | - | Years | Ta ≤ 50°C |

○Initial Data FFFFh in all address. *1 Not 100% TESTED

◇ DC OPERATING CHARACTERISTICS
(Unless otherwise specified Ta=-40~105°C, Vcc=2.5~5.5V)

| Parameter | Symbol | Specification | | | Unit | Test Condition |
|------------------------|--------|---------------|------|-----------|------|-------------------------------|
| | | Min. | Typ. | Max | | |
| "L" Input Voltage1 | VIL1 | -0.3 | - | 0.8 | V | 4.0 ≤ Vcc ≤ 5.5 |
| "L" Input Voltage2 | VIL2 | -0.3 | - | 0.2 × Vcc | V | 2.5 ≤ Vcc ≤ 4.0 |
| "H" Input Voltage1 | VIH1 | 2.0 | - | Vcc+0.3 | V | 4.0 ≤ Vcc ≤ 5.5 |
| "H" Input Voltage2 | VIH2 | 0.7 × Vcc | - | Vcc+0.3 | V | 2.5 ≤ Vcc ≤ 4.0 |
| "L" Output Voltage1 | VOL1 | 0 | - | 0.4 | V | IOL=2.1mA, 4.0 ≤ Vcc ≤ 5.5 |
| "L" Output Voltage2 | VOL2 | 0 | - | 0.2 | V | IOL=100 μA, 2.5 ≤ Vcc ≤ 4.0 |
| "H" Output Voltage1 | VOH1 | 2.4 | - | Vcc | V | IOH=-0.4mA, 4.0 ≤ Vcc ≤ 5.5 |
| "H" Output Voltage2 | VOH2 | Vcc-0.2 | - | Vcc | V | IOH=-100 μA, 2.5 ≤ Vcc ≤ 4.0 |
| Input Leakage Current | ILI | -1 | - | 1 | μA | VIN=0~Vcc |
| Output Leakage Current | ILO | -1 | - | 1 | μA | VOUT=0~Vcc, CS=0V |
| Operating Current | ICC1 | - | - | 3.0 | mA | fSK=2MHz, tE/W=5ms (WRITE) |
| | ICC2 | - | - | 1.5 | mA | fSK=2MHz (READ) |
| | ICC3 | - | - | 4.5 | mA | fSK=2MHz, tE/W=5ms (WRALERAL) |
| Standby Current | ISB | - | - | 2 | μA | CS=0V, DO=OPEN |

◇ AC OPERATING CHARACTERISTICS
(Unless otherwise specified Ta=-40~105°C, Vcc=2.5~5.5V)

| Parameter | Symbol | 2.5V ≤ Vcc ≤ 5.5V | | | Unit |
|----------------------------|--------|-------------------|------|-----|------|
| | | Min. | Typ. | Max | |
| SK Clock Frequency | fSK | - | - | 2 | MHz |
| SK High Time | tSKH | 230 | - | - | ns |
| SK Low Time | tSKL | 230 | - | - | ns |
| CS Low Time | tCS | 200 | - | - | ns |
| CS Setup Time | tCSS | 50 | - | - | ns |
| DI Setup Time | tDIS | 100 | - | - | ns |
| CS Hold Time | tGSH | 0 | - | - | ns |
| DI Hold Time | tDIH | 100 | - | - | ns |
| Data "1" Output Delay Time | tPD1 | - | - | 200 | ns |
| Data "0" Output Delay Time | tPD0 | - | - | 200 | ns |
| CS to Status Valid | tSV | - | - | 150 | ns |
| CS to Output High-Z | tDF | - | - | 150 | ns |
| Write Cycle time | tE/W | - | - | 5 | ms |

○This product is not designed for protection against radioactive rays.

◇ BLOCK DIAGRAM

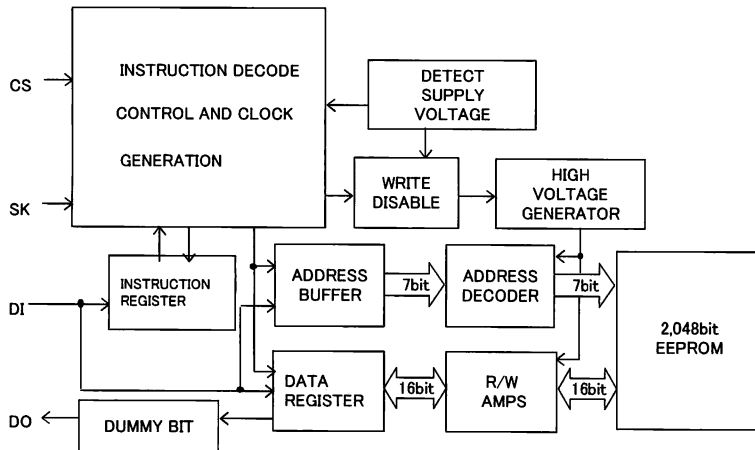


Fig.-1 BLOCK DIAGRAM

◇ PIN No. / PIN NAME


| PIN No. | PIN NAME | |
|-------------|--------------|-------------|
| 1 | CS | N.C. |
| 2 | SK | Vcc |
| 3 | DI | CS |
| 4 | DO | SK |
| 5 | GND | DI |
| 6 | N.C. | DO |
| 7 | N.C. | GND |
| 8 | Vcc | N.C. |
| PART NUMBER | BR93A56RF-W | BR93A56F-W |
| | BR93A56RFJ-W | BR93A56FJ-W |

◇ NOTES FOR POWER SUPPLY

This IC has a POR (Power On Reset) circuit as mistake write countermeasure.

After POR action, it gets in write disable status. The POR circuit is valid only when power is ON, and does not work when power is OFF. However, if CS is "H" at power ON/OFF, it may become write enable status owing to noises and the likes. For secure operations, observe the following conditions.

1. Set CS = "L".
2. Turn on power so as to satisfy the recommended conditions of tR, tOFF, Vbot for POR circuit operation.

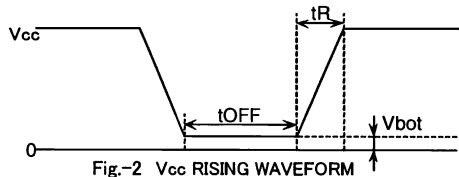

◇Recommended conditions of tR, tOFF, Vbot

| tR | tOFF | Vbot |
|-------------|------------|------------|
| Below 10ms | Above 10ms | Below 0.3V |
| Below 100ms | Above 10ms | Below 0.2V |

◇ CAUTIONS ON USE

(1) Absolute Maximum Ratings

If the absolute maximum ratings such as impressed voltage and action temperature range and so forth are exceeded, LSI may be destructed. Do not impress voltage and temperature exceeding the absolute maximum ratings. In the case of fear exceeding the absolute maximum ratings, take physical safety countermeasures such as fuses, and see to it that conditions exceeding the absolute maximum ratings should not be impressed to LSI.

(2) GND electric potential

Set the voltage of GND terminal lowest at any action condition. Make sure that each terminal voltage is not lower than that of GND terminal in consideration of transition status.

(3) Heat design

In consideration of allowable loss in actual use condition, carry out heat design with sufficient margin.

(4) Terminal to terminal shortcircuit and wrong packaging

When to package LSI onto a board, pay sufficient attention to LSI direction and displacement. Wrong packaging may destruct LSI. And in the case of shortcircuit between LSI terminals and terminals and power source, terminal and GND owing to foreign matter, LSI may be destructed.

(5) Use in a strong electromagnetic field may cause malfunction, therefore, evaluated design sufficiently.

◇ PHYSICAL DIMENSION

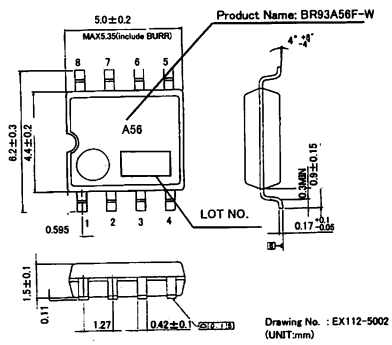


Fig-4(a) PHYSICAL DIMENSION SOP8 (BR93A56F-W)

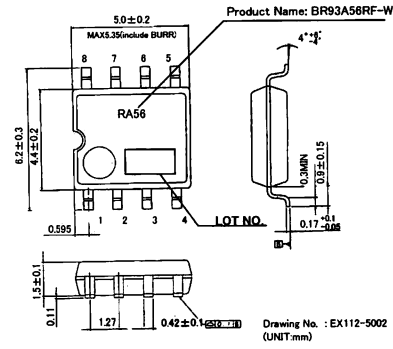


Fig-4(b) PHYSICAL DIMENSION SOP8 (BR93A56RF-W)

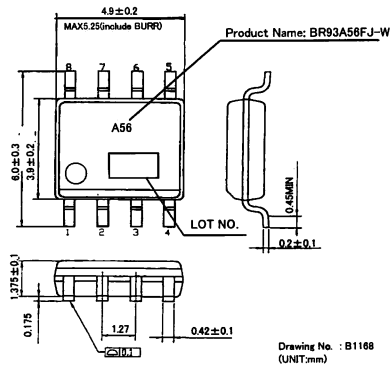


Fig-4(c) PHYSICAL DIMENSION SOP-J8 (BR93A56FJ-W)

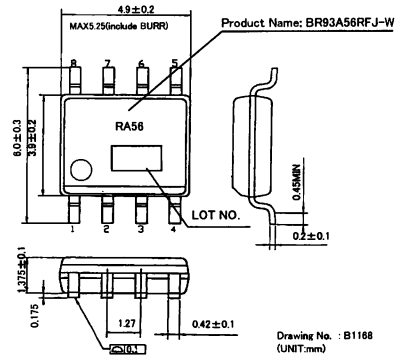


Fig-4(d) PHYSICAL DIMENSION SOP-J8 (BR93A56RFJ-W)

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.

In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.

Thank you for your accessing to ROHM product informations.
More detail product informations and catalogs are available,
please contact your nearest sales office.

Please contact our sales offices for details ;

| | | |
|-------------------------|---------------------------|----------------------------|
| U.S.A / San Diego | TEL : +1(858)625-3630 | FAX : +1(858)625-3670 |
| Atlanta | TEL : +1(770)754-5972 | FAX : +1(770)754-0691 |
| Dallas | TEL : +1(972)312-8818 | FAX : +1(972)312-0330 |
| Germany / Dusseldorf | TEL : +49(2154)9210 | FAX : +49(2154)921400 |
| United Kingdom / London | TEL : +44(1)908-282-666 | FAX : +44(1)908-282-528 |
| France / Paris | TEL : +33(0)1 56 97 30 60 | FAX : +33(0) 1 56 97 30 80 |
| China / Hong Kong | TEL : +852(2)740-6262 | FAX : +852(2)375-8971 |
| Shanghai | TEL : +86(21)6279-2727 | FAX : +86(21)6247-2066 |
| Dilian | TEL : +86(411)8230-8549 | FAX : +86(411)8230-8537 |
| Beijing | TEL : +86(10)8525-2483 | FAX : +86(10)8525-2489 |
| Taiwan / Taipei | TEL : +866(2)2500-6956 | FAX : +866(2)2503-2869 |
| Korea / Seoul | TEL : +82(2)8182-700 | FAX : +82(2)8182-715 |
| Singapore | TEL : +65-6332-2322 | FAX : +65-6332-5662 |
| Malaysia / Kuala Lumpur | TEL : +60(3)7958-8355 | FAX : +60(3)7958-8377 |
| Philippines / Manila | TEL : +63(2)807-6872 | FAX : +63(2)809-1422 |
| Thailand / Bangkok | TEL : +66(2)254-4890 | FAX : +66(2)256-6334 |

Japan /
(Internal Sales)

| | | | |
|----------|--|-----------------------|-----------------------|
| Tokyo | 2-1-1, Yaesu, Chuo-ku, Tokyo 104-0082 | TEL : +81(3)5203-0321 | FAX : +81(3)5203-0300 |
| Yokohama | 2-4-8, Shin Yokohama, Kohoku-ku, Yokohama, Kanagawa 222-8575 | TEL : +81(45)476-2131 | FAX : +81(45)476-2128 |
| Nagoya | Dainagayo Building 9F 3-28-12, Meieki, Nakamura-ku, Nagoya, Aichi 450-0002 | TEL : +81(52)581-8521 | FAX : +81(52)561-2173 |
| Kyoto | 579-32 Higashi Shiokouji-cho, Karasuma Nishi-iru, Shiokoujidori, Shimogyo-ku, Kyoto 600-8216 | TEL : +81(75)311-2121 | FAX : +81(75)314-6559 |

(Contact address for overseas customers in Japan)

| | | |
|----------|-----------------------|------------------------|
| Yokohama | TEL : +81(45)476-9270 | FAX : +81(045)476-9271 |
|----------|-----------------------|------------------------|