

### GENERAL DESCRIPTION

The CM2855 family is positive, linear regulators featured low quiescent current (30µA typ.) with low dropout voltage, making them ideal for battery applications. The space-saving SOT-23-6 package is attractive for “Pocket” and “Hard Held” applications.

These rugged devices have both Thermal Shutdown, and Current Fold-back to prevent device failure under the “Worst” of operating conditions.

An additional feature is a “Power Good” detector, which pulls low when the output is out of regulation.

The CM2855 is stable with an output capacitance of 2.2µF or greater.


### FEATURES

- ◆ Very Low Dropout Voltage
- ◆ Low Current Consumption: Typ. 30µA, Max. 35µA
- ◆ High Accuracy Output Voltage: +/- 2.5%
- ◆ Guaranteed 300mA Output
- ◆ Input Range of 2.6V to 7.0V
- ◆ Thermal Shutdown
- ◆ Current Limiting
- ◆ Power Good Output Function
- ◆ Compact Package: SOT-23-6
- ◆ Adjustable Output Voltages
- ◆ Short Circuit Current Fold-Back
- ◆ Low Temperature Coefficient

### APPLICATIONS


- ◆ Battery-powered devices
- ◆ Personal communication devices
- ◆ Home electric/electronic appliances
- ◆ PC peripherals

### TYPICAL APPLICATIONS

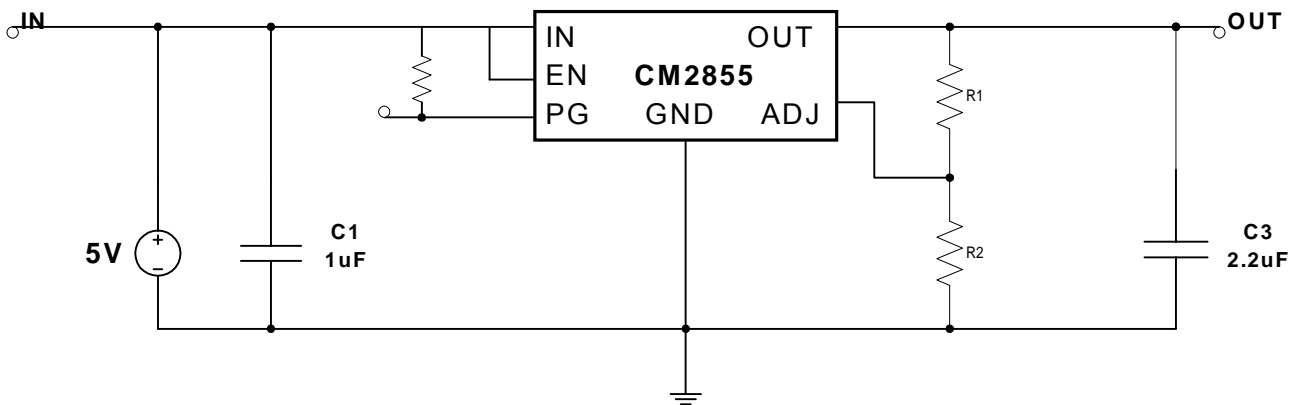


- Note:** 1. Suggest to add a small Cap 100pF between OUT and connection of R1 and R2 to get less VOUT ripple  
 $V_{out} = V_{ref} * (1 + R1/R2)$ ;  $V_{ref} = 1.176V$   
 2. Enable pin can not be floating.

### PIN CONFIGURATION

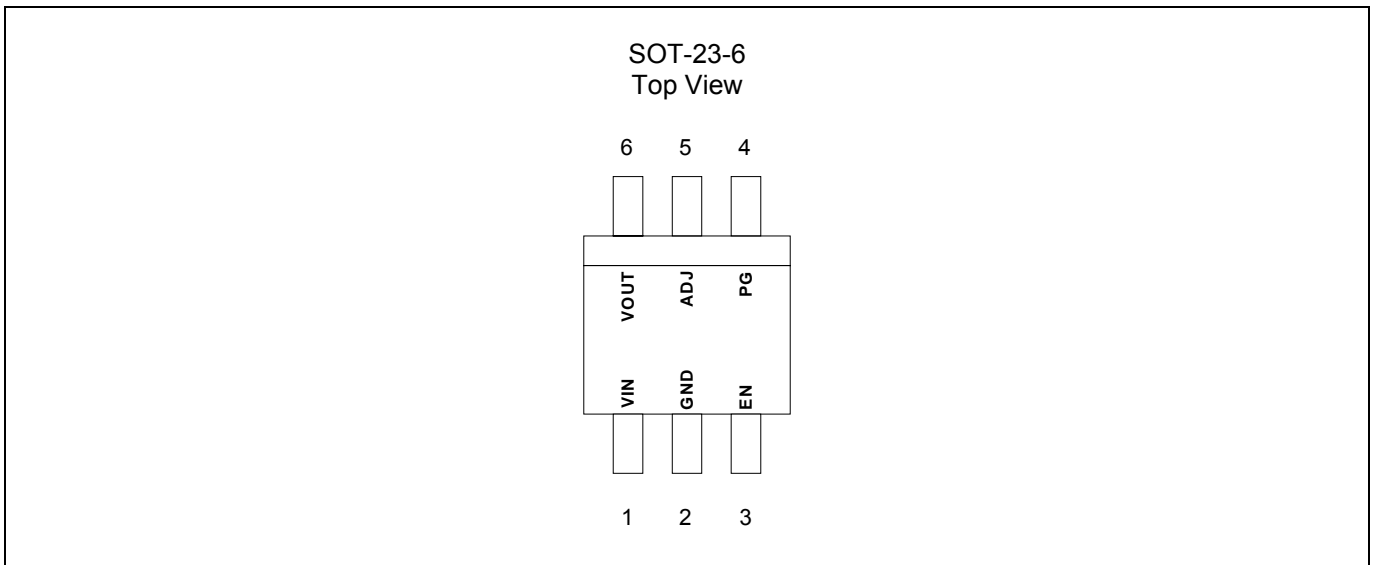

### BLOCK DIAGRAM

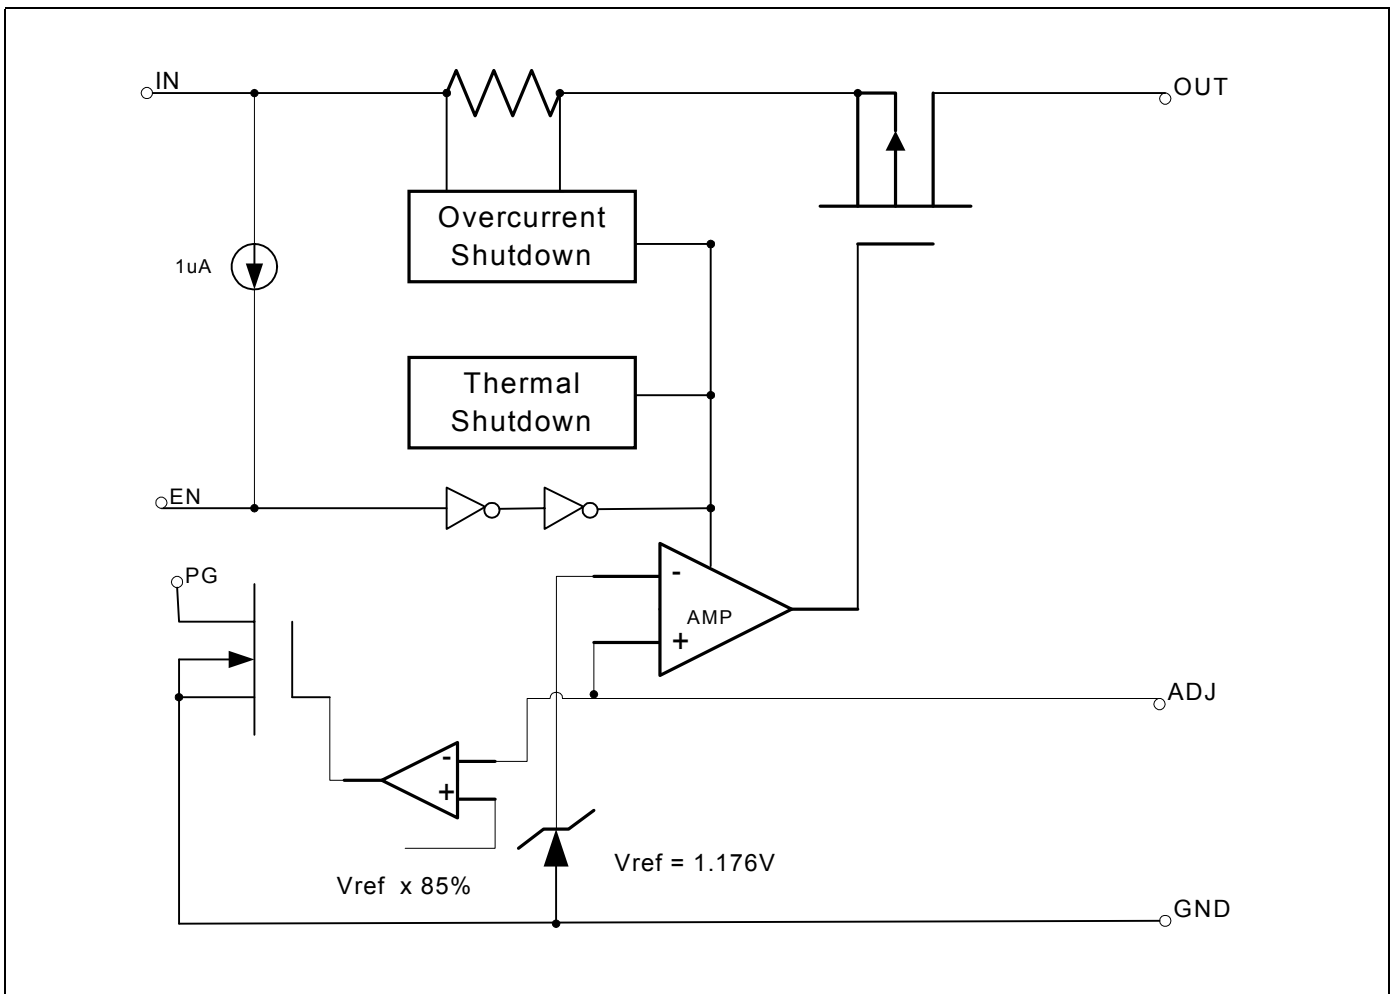



## ORDERING INFORMATION

| Part Number  | Output Voltage | Temperature Range | Package  |
|--------------|----------------|-------------------|----------|
| CM2855IM26   | Adjustable     | -40 ~ +85         | SOT-23-6 |
| CM2855GIM26* | Adjustable     | -40 ~ +85         | SOT-23-6 |

\*Note: G : Suffix for Pb Free Product

## ABSOLUTE MAXIMUM RATINGS

Input Voltage ..... +7V  
 Output Current .....  $P_D / (V_{IN} - V_o)$   
 Output Voltage ..... GND-0.3V to  $V_{IN}+0.3V$   
 ESD Classification ..... B

## OPERATING RATINGS

Ambient Temperature Range ( $T_A$ ) ..... -40 to +85  
 Junction Temperature Range ..... -40 to +125

## THERMAL INFORMATION

| Parameter                            |          | Maximum       | Unit |
|--------------------------------------|----------|---------------|------|
| Thermal Resistance ( $\theta_{JA}$ ) | SOT-23-6 | 260           | /W   |
| Internal Power Dissipation ( $P_D$ ) | SOT-23-6 | <b>Note 1</b> |      |
| Maximum Junction Temperature         |          | 150           |      |
| Maximum Lead Temperature (10 Sec)    |          | 300           |      |

Caution: Stress above the listed absolute rating may cause permanent damage to the device.

**Note 1:**  $P_{D(MAX)} = (T_{J(MAX)} - T_A) / \theta_{JA}$ , where  $\theta_{JA}$  depends on the printed circuit layout.

### ELECTRICAL CHARACTERISTICS

$T_A = +25^\circ\text{C}$ ;  $V_{IN} = V_{IN(MIN)}$  unless otherwise noted

| Parameter                          | Symbol        | Test Conditions  | CM2855                                      |                          |          | Unit                |   |
|------------------------------------|---------------|--|---|--------------------------|----------|---------------------|---|
|                                    |               |  | Min.  | Typ.                     | Max.     |                     |   |
| Input Voltage                      | $V_{IN}$      |  | <b>Note 2</b>                               |                          | 7        | V                   |   |
| Output Voltage Accuracy            | $V_{OUT}$     | $I_O = 1\text{mA}$   | -2.5  |                          | 2.5      | %                   |   |
| Dropout Voltage                    | $V_{DROPOUT}$ | $I_O = 300\text{mA}$ ,<br>$V_{OUT} = V_{O(NOM)} - 2.5\%$           | $1.2\text{V} < V_{O(NOM)} \leq 2.0\text{V}$ |                          | 1300     | mV                  |   |
|                                    |               |  | $2.0\text{V} < V_{O(NOM)} \leq 2.5\text{V}$ |                          | 800      |                     |   |
|                                    |               |  | $2.5\text{V} < V_{O(NOM)}$                  |                          | 300      |                     |   |
| Output Current                     | $I_O$         | $V_{OUT} > 1.2\text{V}$  | 300   |                          |          | mA                  |   |
| Current Limit                      | $I_{LIM}$     | $V_{OUT} > 1.2\text{V}$  |   | 800                      |          | mA                  |   |
| Short Circuit Current              | $I_{SC}$      | $V_{OUT} < 0.8\text{V}$ ( <b>Note 3</b> )                          |   | 150                      |          | mA                  |   |
| Quiescent Current                  | $I_Q$         | $I_O = 0\text{mA}$   |   | 30                       | 35       | $\mu\text{A}$       |   |
| Ground Pin Current                 | $I_{GND}$     | $I_O = 1\text{mA}$ to $300\text{mA}$                               |   | 30                       | 35       | $\mu\text{A}$       |   |
| Bandgap Reference                  | $V_{BG}$      | $V_O = V_{BG}$ , load = $10\text{mA}$                              | 1.168                                       | 1.176                    | 1.184    | V                   |   |
| Line Regulation                    | $REG_{LINE}$  | $I_{OUT} = 1\text{mA}$ , $V_{IN} = V_{OUT} + 1$ to $V_{OUT} + 2$   | $V_{OUT} < 2.0\text{V}$                     | -0.1                     | 0.02     | 0.1                 | % |
|                                    |               |  | $2.0\text{V} < V_{OUT} < 3.0\text{V}$       | -0.15                    | 0.03     | 0.15                | % |
|                                    |               |  | $3.0\text{V} < V_{OUT}$                     | -0.3                     | 0.06     | 0.3                 | % |
| Load Regulation                    | $REG_{LOAD}$  | $I_O = 1\text{mA}$ to $300\text{mA}$                               |   | 0.2                      | 1        | %                   |   |
| Over Temperature Shutdown          | OTS           |  |   | 150                      |          |                     |   |
| Over Temperature Hysteresis        | OTH           |  |   | 30                       |          |                     |   |
| $V_{OUT}$ Temperature Coefficient  | TC            |  |   | 25                       |          | ppm/                |   |
| Power Supply Rejection             | PSRR          | $I_O = 100\text{mA}$<br>$C_O = 2.2\mu\text{F}$ ceramic             | f=1kHz                                      |                          | 60       | dB                  |   |
|                                    |               |  | f=10kHz                                     |                          | 50       |                     |   |
|                                    |               |  | f=100kHz                                    |                          | 40       |                     |   |
| Output Voltage Noise               | eN            | f=10Hz to 100kHz<br>$I_O = 10\text{mA}$                            |   | $C_O = 2.2\mu\text{F}$   | 30       | $\mu\text{V}_{rms}$ |   |
| EN Input Bias Current              | $I_{EH}$      | $V_{EN} = V_{IN}$ , $V_{IN} = 2.7\text{V}$ to $7\text{V}$          |   |                          | 0.1      | $\mu\text{A}$       |   |
|                                    | $I_{EL}$      | $V_{EN} = 0\text{V}$ , $V_{IN} = 2.7\text{V}$ to $7\text{V}$       |   | 1.0                      | 3.0      | $\mu\text{A}$       |   |
| EN Input Threshold                 | $V_{EH}$      | $V_{IN} = 2.7\text{V}$ to $7\text{V}$                              |   | $V_{IN}/2 + 0.8\text{V}$ | $V_{IN}$ | V                   |   |
|                                    | $V_{EL}$      | $V_{IN} = 2.7\text{V}$ to $7\text{V}$                              | 0   | $V_{IN}/2 - 0.8\text{V}$ |          | V                   |   |
| Shutdown Supply Current            | $I_{SD}$      | $V_{IN} = 5.0\text{V}$ , $V_{OUT} = 0\text{V}$ , $V_{EN} < V_{EL}$ |   | 2.0                      |          | $\mu\text{A}$       |   |
| Shutdown Output Voltage            | $V_{O,SD}$    | $I_O = 300\text{mA}$   | 0   |                          | 0.1      | V                   |   |
| PG Leakage Current                 | $I_{LC}$      | $V_{PG} = 7\text{V}$   |   |                          | 1        | $\mu\text{A}$       |   |
| PG Voltage Rating                  | $V_{PG}$      | $V_{OUT}$ in regulation  |   |                          | 7        | V                   |   |
| PG Low Threshold                   |               | % of $V_O$ (PG ON)   | 89.5  |                          |          | %                   |   |
| PG High Threshold                  |               | % of $V_O$ (PG OFF)  |   |                          | 96.5     | %                   |   |
| PG Voltage Low                     | $V_{OL}$      | $I_{SINK} = 2\text{mA}$  |   |                          | 0.1      | V                   |   |
| Delay Time to PG ( <b>Note 3</b> ) | $t_{DELAY}$   | $V_{IN} = 5\text{V}$   |   | 7.8                      |          | ms                  |   |
|                                    |               | $V_{IN} = 3\text{V}$   |   | 3.8                      |          | ms                  |   |

**Note 2.**  $V_{IN(MIN)} = V_{OUT} + V_{DROPOUT}$

**Note 3.** Guaranteed by Design, not 100% test.  $V_{IN}$  start time needs to be less than 2ms.

**Note 4.** Short Circuit Current and Current limit value will increase as input voltage is larger than  $V_{IN(MIN)}$

### DETAILED DESCRIPTION

The CM2855 family of CMOS regulators contain a PMOS pass transistor, voltage reference, error amplifier, over-current protection, output short circuit protection, thermal shutdown, and power good function.

The P-channel pass transistor receives data from the error amplifier, over-current shutdown, short output protection, and thermal protection circuits. During normal operation, the error amplifier compares the output voltage to a precision reference. Over-current and Thermal shutdown circuits become active when the junction temperature exceeds 150 °C, or the current exceeds 300mA. During thermal shutdown, the output voltage remains low. Normal operation is restored when the junction temperature drops below 120 °C.

The CM2855 switches from voltage mode to current mode when the load exceeds the rated output current. This prevents over-stress. The CM2855 also incorporates current fold-back to reduce power dissipation when the output is short-circuited. This feature becomes active when the output drops below 0.95V, and reduces the current flow by 65%. Full current is restored when the voltage exceeds 0.95V.

### EXTERNAL CAPACITOR

The CM2855 is stable with an output capacitor to ground of 2.2µF or greater. It can keep stable even with higher or poor ESR capacitors. A second capacitor is recommended between the input and ground to stabilize VIN. The input capacitor should be larger than 0.1µF to have a beneficial effect. All capacitors should be placed in close proximity to the pins. A “quiet” ground termination is desirable.

### ENABLE







When actively, pulled low, the PMOS pass transistor shut off, and all internal circuits are powered down. In this state, the quiescent current is less than 1µA. This pin behaves much like an electronic switch.

### POWER GOOD


The CM2855 includes the Power Good feature. Normally, Pin 4 is floating, however, when the output is lower than 85% of the specified voltage, it pulls low. This can occur under the following conditions:

- 1) Input Voltage too low
- 2) During Over-Temperature
- 3) During Over-Current


### TYPICAL ELECTRICAL CHARACTERISTICS

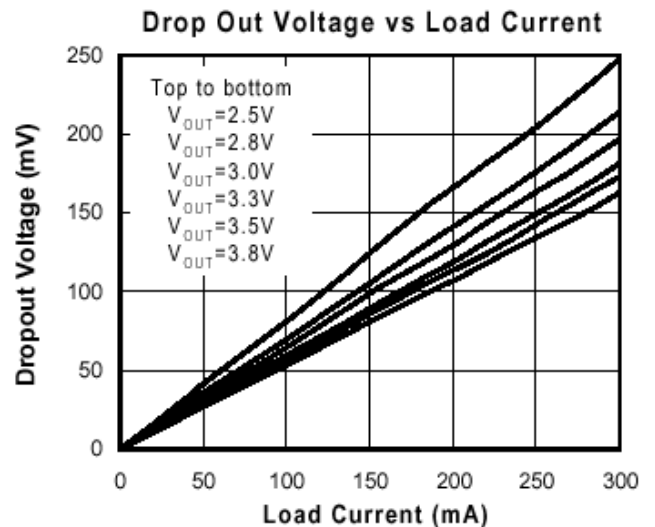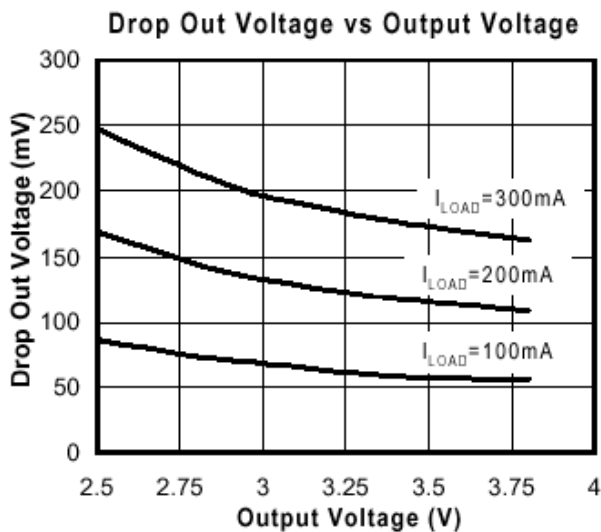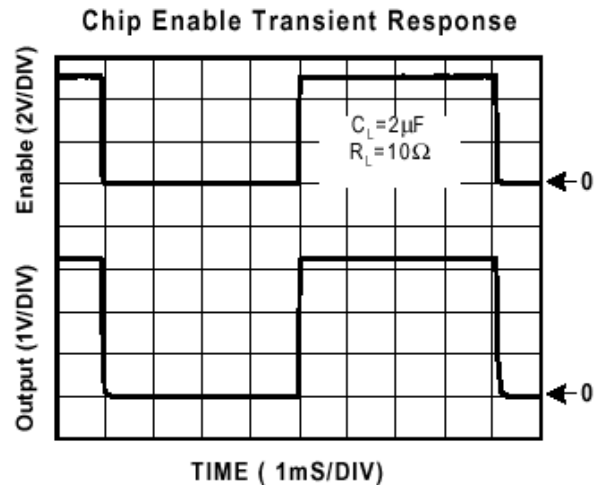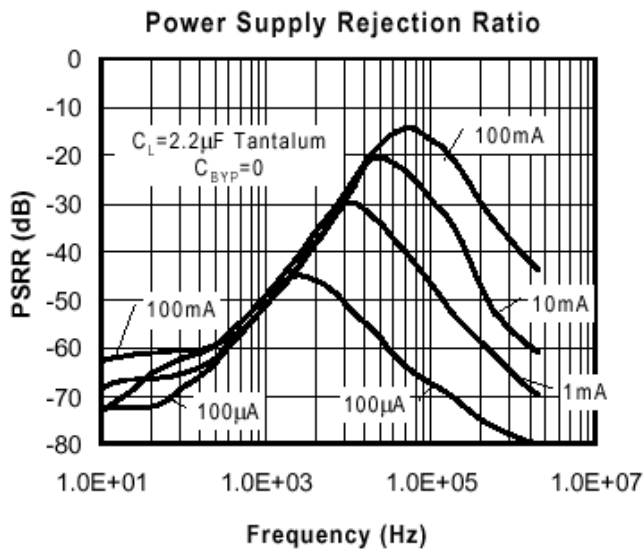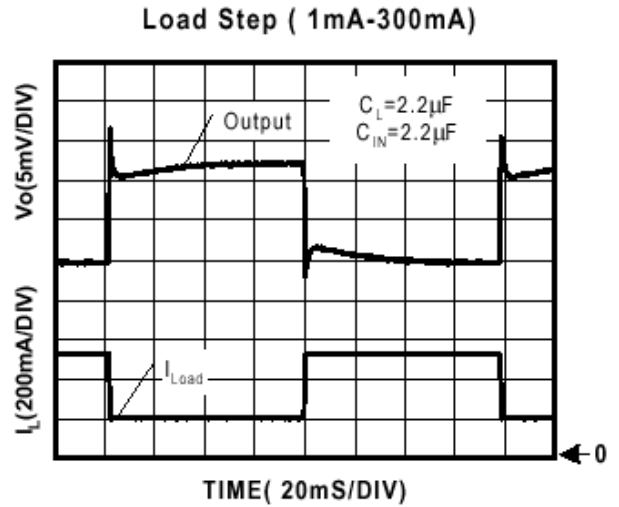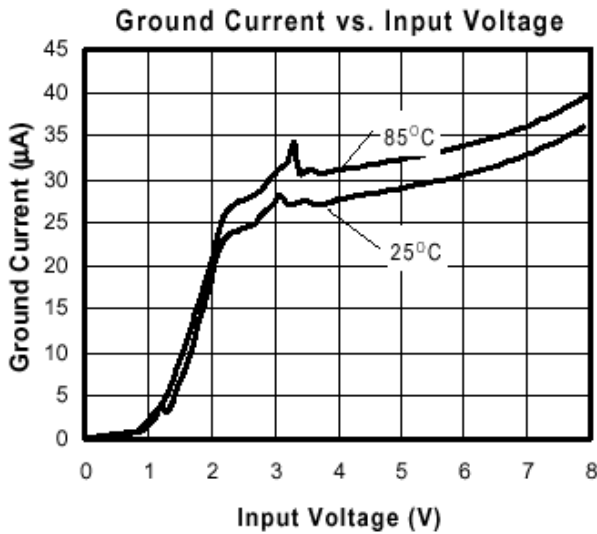


**Noise Measurement**

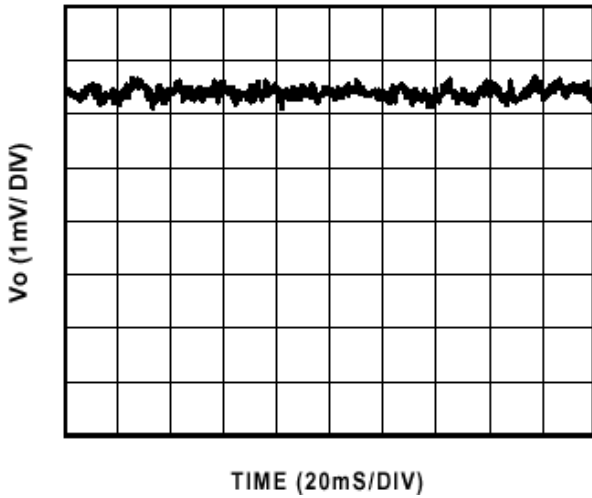


**Safe Operating Area**

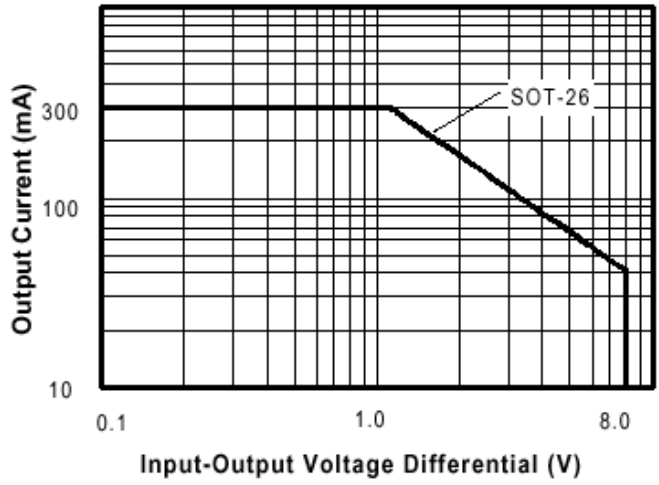


**Short Circuit Response**

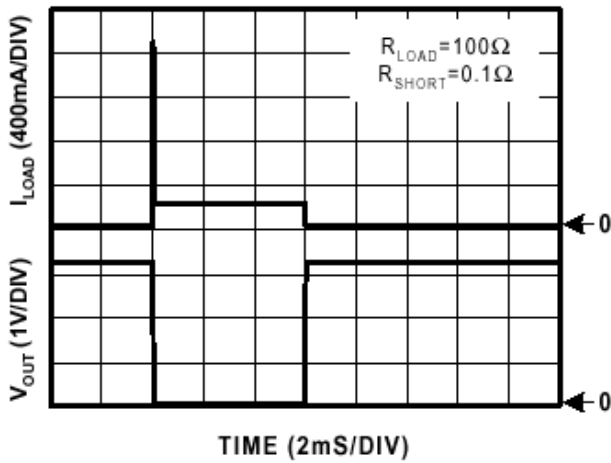


**Overtemperature Shutdown**




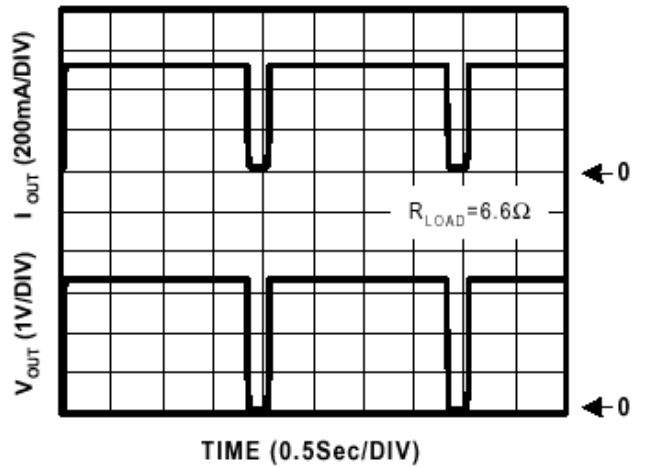


**Current Limit Response**

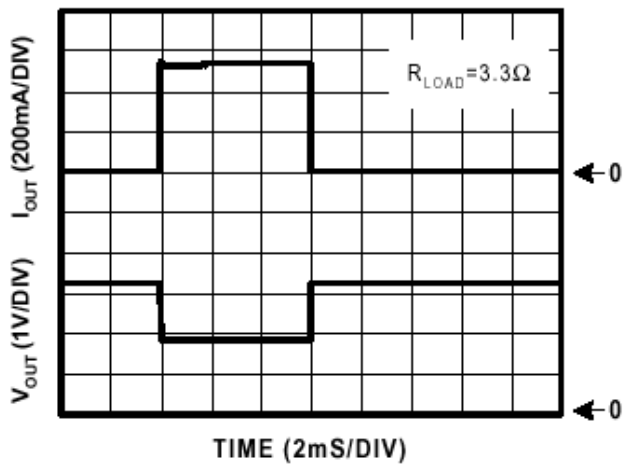

**Line Transient Response**


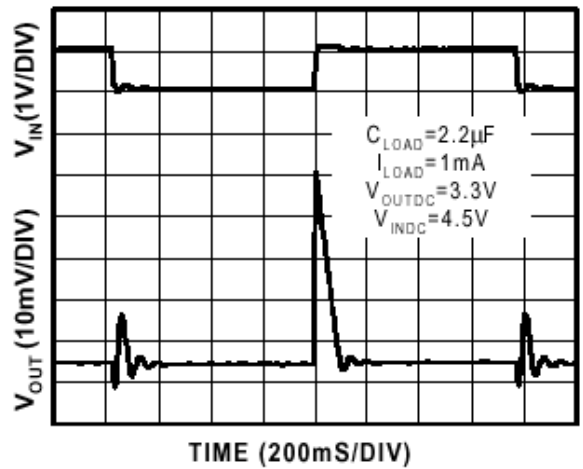


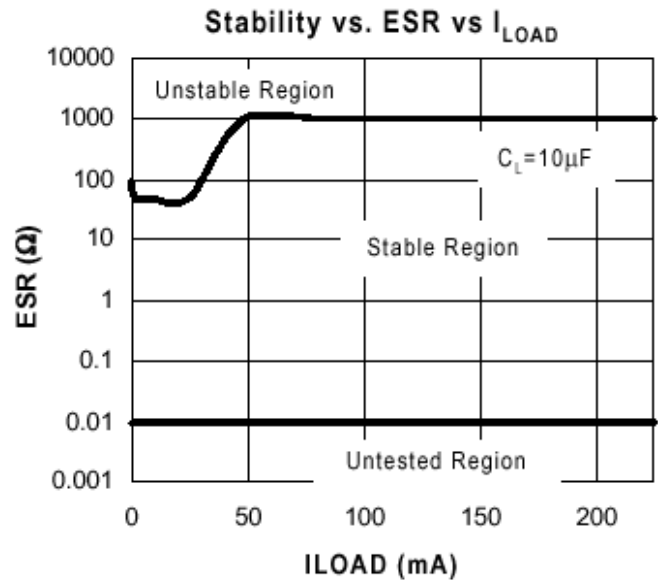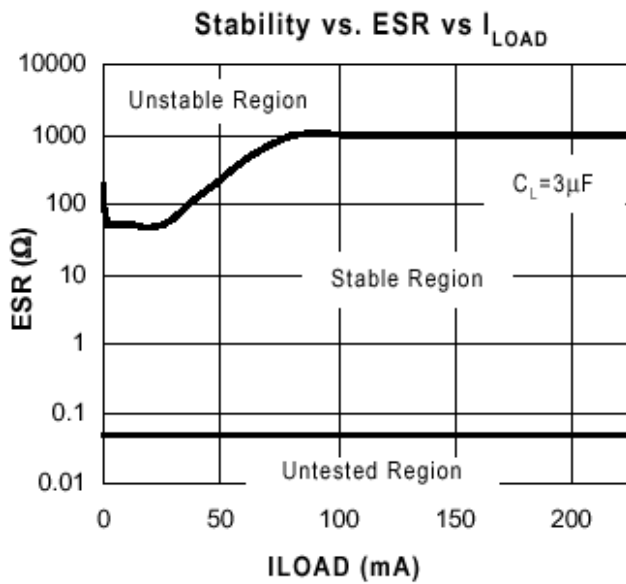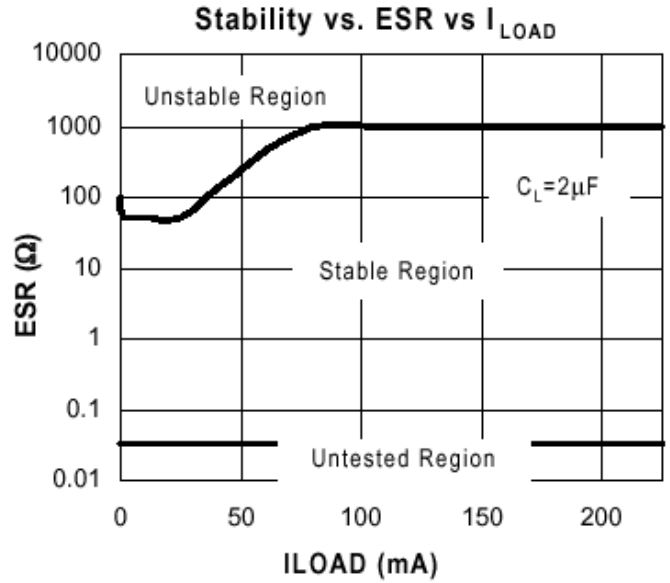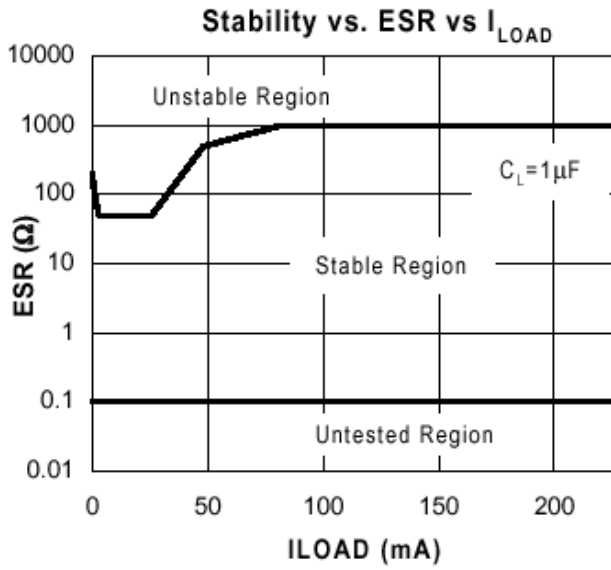





### PACKAGE DIMENSION

#### SOT-23-6 (M26)

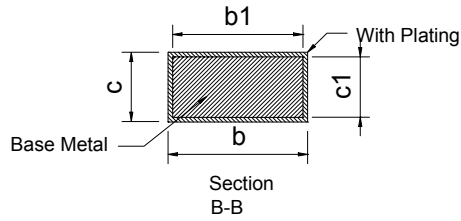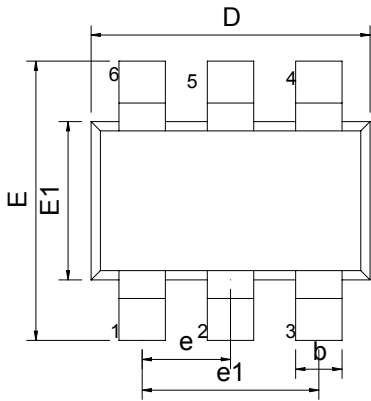

| SYMBOLS | DIMENSIONS IN MILLIMETERS |      |      | DIMENSIONS IN INCHS |       |       |
|---------|---------------------------|------|------|---------------------|-------|-------|
|         | MIN                       | NOM  | MAX  | MIN                 | NOM   | MAX   |
| A       | 1.05                      | ---  | 1.35 | 0.041               | ---   | 0.053 |
| A1      | 0.05                      | ---  | 0.15 | 0.002               | ---   | 0.006 |
| A2      | 1.00                      | 1.10 | 1.20 | 0.039               | 0.043 | 0.047 |
| b       | 0.25                      | ---  | 0.55 | 0.010               | ---   | 0.020 |
| b1      | 0.25                      | 0.40 | 0.50 | 0.010               | 0.016 | 0.018 |
| c       | 0.08                      | ---  | 0.20 | 0.003               | ---   | 0.008 |
| c1      | 0.08                      | 0.11 | 0.15 | 0.003               | 0.004 | 0.006 |
| D       | 2.70                      | 2.90 | 3.00 | 0.106               | 0.114 | 0.118 |
| E       | 2.60                      | 2.80 | 3.00 | 0.102               | 0.110 | 0.118 |
| E1      | 1.50                      | 1.60 | 1.70 | 0.059               | 0.063 | 0.067 |
| L       | 0.35                      | 0.45 | 0.55 | 0.014               | 0.018 | 0.022 |
| L1      | 0.60 REF                  |      |      | 0.024 REF           |       |       |
| e       | 0.95 BSC                  |      |      | 0.037 BSC           |       |       |
| e1      | 1.90 BSC                  |      |      | 0.075 BSC           |       |       |
| θ       | 0°                        | 5°   | 10°  | 0°                  | 5°    | 10°   |
| θ1      | 3°                        | 5°   | 7°   | 3°                  | 5°    | 7°    |
| θ2      | 6°                        | 8°   | 10°  | 6°                  | 8°    | 10°   |

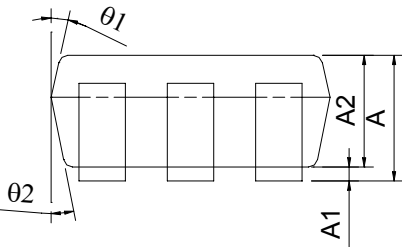

### IMPORTANT NOTICE

Champion Microelectronic Corporation (CMC) reserves the right to make changes to its products or to discontinue any integrated circuit product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

A few applications using integrated circuit products may involve potential risks of death, personal injury, or severe property or environmental damage. CMC integrated circuit products are not designed, intended, authorized, or warranted to be suitable for use in life-support applications, devices or systems or other critical applications. Use of CMC products in such applications is understood to be fully at the risk of the customer. In order to minimize risks associated with the customer's applications, the customer should provide adequate design and operating safeguards.

#### **HsinChu Headquarter**

---

5F, No. 11, Park Avenue II,  
Science-Based Industrial Park,  
HsinChu City, Taiwan  
TEL: +886-3-567 9979  
FAX: +886-3-567 9909

#### **Sales & Marketing**

---

11F, No. 306-3, SEC. 1, Ta Tung Road,  
Hsichih, Taipei Hsien 221, Taiwan  
TEL: +886-2-8692 1591  
FAX: +886-2-8692 1596

---