


Embedded Engine Board

HS-2604

EDEN Embedded Engine Board with CRT/Panel & three LAN

- ★ Mini PCI
- ★ 133MHz FSB
- ★ SO-DIMM
- ★ CRT/Panel
- ★ Three LAN
- ★ ATA/33/66/100
- ★ RS-232/422/485
- ★ 4 COM
- ★ PC/104
- ★ IrDA
- ★ USB
- ★ DOC
- ★ WDT
- ★ Single +5V
- ★ H/W Monitor

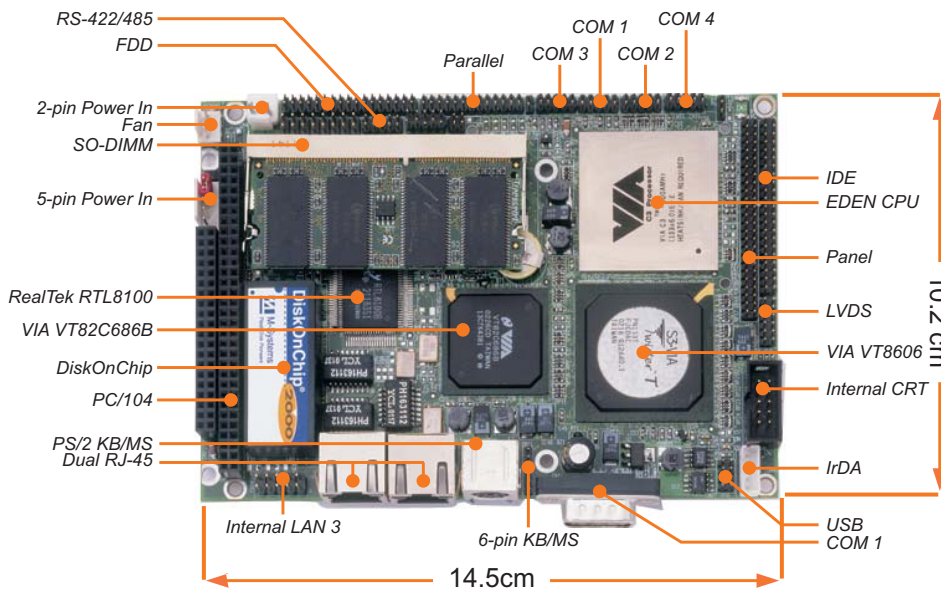

**Low Power!!
Single +5V!!**

★ Ordering Guide

- **HS-2604**
EDEN 667MHz Embedded Engine Board with CRT/Panel & Three LAN
- **HS-2604/400**
EDEN 400MHz Embedded Engine Board with CRT/Panel & Three LAN

★ Features

- VIA EDEN 400/667MHz low power embedded CPU
- Mini PCI Local Bus support
- Supports 100/133MHz FSB
- One SO-DIMM socket with a max. capacity of 256MB
- VIA VT8606/VT82C686B system chipset
- SMC 37C669 and VIA VT82C686B super I/O chipset
- VIA VT8606 CRT/Panel display controller
- Three RealTek RTL8100 10/100 Based LAN
- Fast PCI ATA/33/66/100 IDE controller
- Four COM, two USB connectors
- PC/104 Bus connector
- DiskOnChip socket supporting memory sizes of up to 288MB
- Supports Single +5V power in
- Supports Hardware Monitor

★ Specifications

- * **CPU:** VIA EDEN 400/667MHz low power embedded CPU
- * **Bus Interface:** Mini PCI Local Bus
- * **Memory:** One SO-DIMM socket supporting up to 256MB
- * **Chipset:** VIA VT8606/VT82C686B
- * **I/O Chipset:** SMC 37C669, VIA VT82C686B
- * **VGA:** VIA VT8606 integrated S3 3D supporting AGP Bus
- * **LAN:** Three RealTek RTL8100 10/100 Based LAN
- * **IDE:** Two IDE disk drives supporting ATA/33/66/100 and with transfer rates of 33/66/100MB/sec.
- * **FDD:** Supports up to two floppy disk drives
- * **Parallel:** One enhanced bi-directional parallel port supporting SPP/ECP/EPP
- * **Serial Port:** 16C550 UART-compatible RS-232/422/485 x 1 and RS-232 x 3 serial ports with 16-byte FIFO
- * **PC/104:** PC/104 Bus connector for 16-bit ISA Bus
- * **IrDA:** One IrDA TX/RX header
- * **USB:** Two USB connectors
- * **Keyboard/Mouse:** PS/2 6-pin Mini DIN or 6-pin header
- * **DiskOnChip:** DiskOnChip socket supporting memory sizes of up to 288MB
- * **BIOS:** AMI PnP Flash BIOS
- * **Watchdog Timer:** Sets 1/2/10/20/110/220 seconds activity trigger with Reset or NMI
- * **CMOS:** Battery backup
- * **Power:** Single +5V/3.2A power in
- * **Operating Temperature:** -15~+60°C
- * **Hardware Monitor:** VIA VT82C686B
- * **Dimensions:** 14.5 x 10.2 cm



BOSER Technology Co., Ltd.

15F-6, No. 77, Hsin Tai Wu Road, Sec. 1, Hsichih, Taipei Hsien 221 Taiwan TEL : 886-2-26983333 FAX : 886-2-26983300
<http://www.boser.com.tw> <http://www.isb.com.tw> <http://www.ipc.com.tw> E-Mail: webmaster@boser.com.tw

U.S.A.

TEL : +1 650 4280868

FAX : +1 650 4281172

GERMANY

TEL : +49 221 954790

FAX : +49 221 9547988

U.K.

TEL : +44 1543 466552

FAX : +44 1543 466553

ITALY

TEL : +39 051 452042

FAX : +39 051 455046

KOREA

TEL : +82 2 34737862

FAX : +82 2 34743120

ISRAEL

TEL : +972 3 9203456

FAX : +972 3 9203555

FRANCE

TEL : +33 1 69061790

FAX : +33 1 69433732

FINLAND

TEL : +358 2 6203753

FAX : +358 2 6203770

SHANGHAI

TEL : 021 63676295-7

FAX : 021 63676286



Intel®
Communications
Alliance
Affiliate Member