

# **ILX208DW**

## **Interface IC of data serial transfer with one supply voltage**

Interface transceivers of serial data as per RS - 232 MAX208 standard with one supply voltage and transmitter bipolar output voltage formed by the embedded voltage multiplication oscillator on 4 external capacitances equal to 0,1mkF, corresponding to EIA/TIA-232E, V.28 standards, are purposed for application in up-to-date high-performance calculating systems, high-speed electronic devices with high reliability of information exchange between remote objects.



### **Packaged IC marking**

ILX208DW SOIC

T<sub>A</sub> = from -40 to 85 °C


#### **Functions:**

4 transmitters and 4 receivers of serial data as per RS – 232 standards


#### **Truth table**

Inputs	Outputs
R <sub>IN</sub> , T <sub>IN</sub>	R <sub>OUT</sub> , T <sub>OUT</sub>
H	L
L	H

Note -  
H – high voltage level;  
L – low voltage level

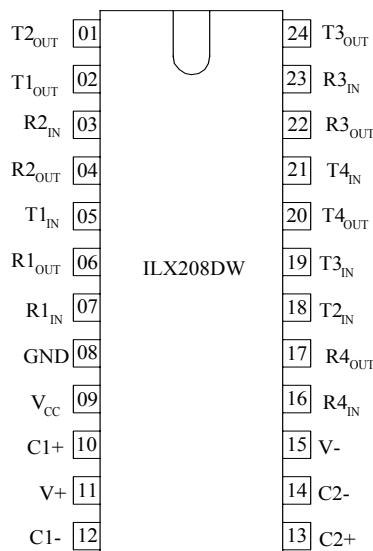

**Figure 1 – Symbols of pins in package**

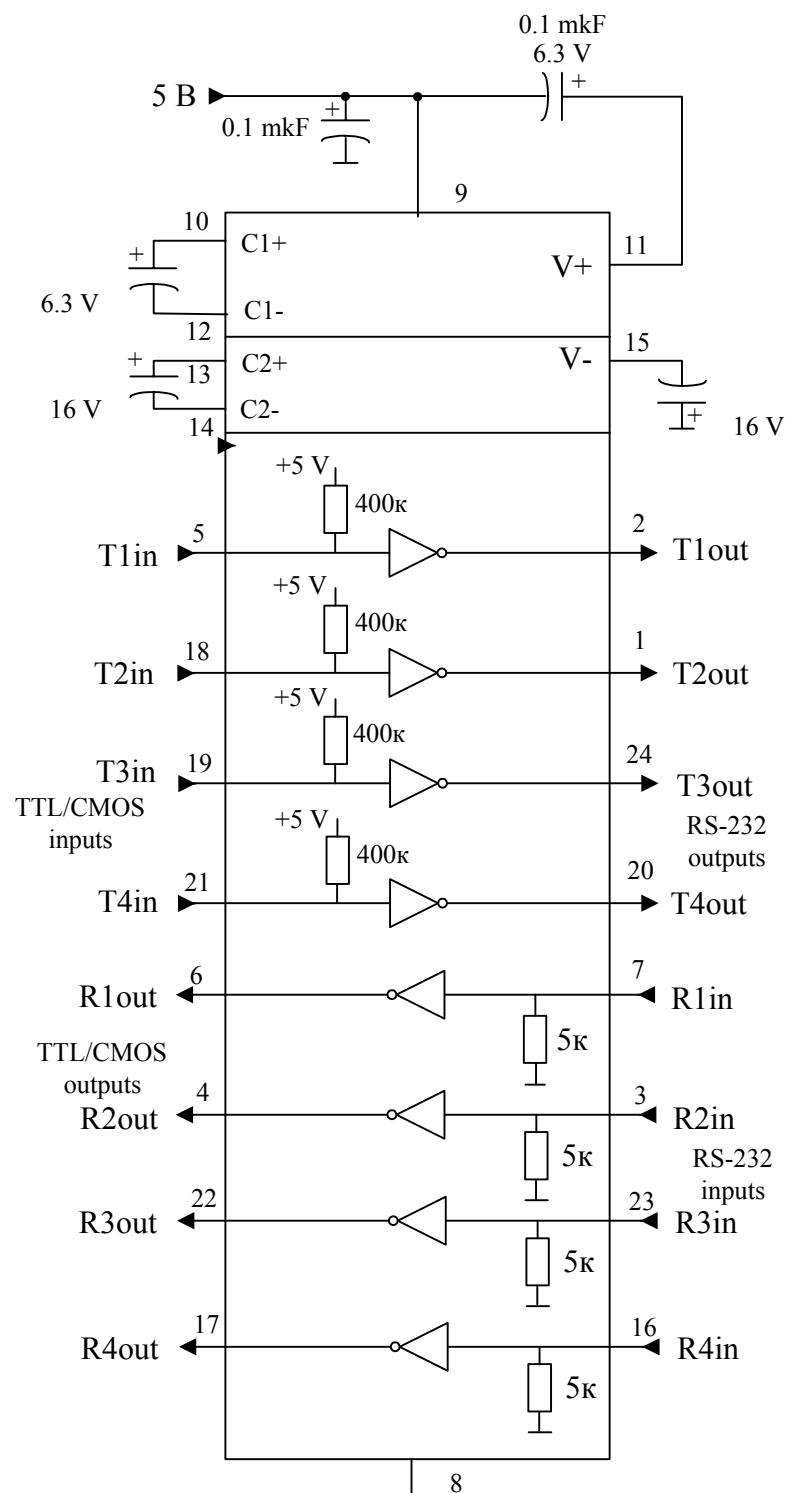**Figure 2 – Block diagram**

# **ILX208DW**

## **Pin description**

<b>Pin number</b>	Pin name	<b>Symbol</b>
01	Transmitter data output (levels RS – 232)	T2 <sub>OUT</sub>
02	Transmitter data output (levels RS – 232)	T1 <sub>OUT</sub>
03	Receiver data input (levels RS – 232)	R2 <sub>IN</sub>
04	Receiver data output (levels RS – 232)	R2 <sub>OUT</sub>
05	Transmitter data input (levels TTL/CMOS)	T1 <sub>IN</sub>
06	Receiver data output (levels RS – 232)	R1 <sub>OUT</sub>
07	Receiver data input (levels RS – 232)	R1 <sub>IN</sub>
08	Common output	GND
09	Supply output from voltage source	V <sub>CC</sub>
10	Output of external capacitance of positive voltage multiplication block	C1+
11	Output of multiplication block positive voltage	V+
12	Output of external capacitance of positive voltage multiplication block	C1-
13	Output of external capacitance of negative voltage multiplication block	C2+
14	Output of external capacitance of negative voltage multiplication block	C2-
15	Output of multiplication block negative voltage	V-
16	Receiver data input (levels RS – 232)	R4 <sub>IN</sub>
17	Receiver data output (levels TTL/CMOS)	R4 <sub>OUT</sub>
18	Transmitter data input (levels TTL/CMOS)	T2 <sub>IN</sub>
19	Transmitter data input (levels TTL/CMOS)	T3 <sub>IN</sub>
20	Transmitter data output (levels RS – 232)	T4 <sub>OUT</sub>
21	Transmitter data input (levels TTL/CMOS)	T4 <sub>IN</sub>
22	Receiver data output (levels TTL/CMOS)	R3 <sub>OUT</sub>
23	Receiver data input (levels RS – 232)	R3 <sub>IN</sub>
24	Transmitter data output (levels RS – 232)	T3 <sub>OUT</sub>

**Absolute maximum ratings**

Symbol	Parameter	Rate		Unit
		min	max	
V <sub>CC</sub>	Supply voltage	-0.3	6.0	V
V-	Transmitter low output voltage	0.3	-14	
V+	Transmitter high output voltage	V <sub>CC</sub> - 0.3 V	14	
VTIN	Transmitter input voltage	-0.3	V+ + 0.3 V	
VRIN	Receiver input voltage	-30	30	
PPK	Dissipated power (for copper frame)	-	941	
ISC	Transmitter short-circuit output current	Continuously		mA
T <sub>a</sub>	Ambient temperature	-60	150	°C

**Maximum ratings**

Symbol	Parameter	Rate		Unit
		min	Max	
V <sub>CC</sub>	Supply voltage	4.5	5.5	V
V-	Transmitter low output voltage	-5.0	-	
V+	Transmitter high output voltage	5.0	-	
VTIN	Transmitter input voltage	0	V <sub>CC</sub>	
VRIN	Receiver input voltage	-30	30	
ISC	Transmitter short-circuit output current	-	±60	mA
T <sub>a</sub>	Ambient temperature	-40	85	°C

## Static parameters

Symbol	Parameter	Test conditions	Rate				Unit	
			25°C		from -40 to 85 °C			
			min	max	min	max		
I <sub>cc</sub>	Consumption current static	V <sub>CC</sub> = 5.5 V V <sub>IL</sub> = 0 V	-	20	-	28*	mA	

## Receiver electrical parameters

V <sub>h</sub>	Hysteresis voltage	V <sub>CC</sub> = 5.0 V	0.2	0.9	0.2	1.0	V
V <sub>on</sub>	On voltage	V <sub>on</sub> ≤ 0.1 V I <sub>OL</sub> ≤ 20 mA	-	2.4	-	2.3	
V <sub>off</sub>	Off voltage	V <sub>o</sub> ≥ V <sub>CC</sub> - 0.1 V I <sub>OH</sub> ≤ -20 mA	0.8	-	0.9	-	
V <sub>OL</sub>	Low output voltage	I <sub>OL</sub> = 1.6 mA V <sub>CC</sub> = 4.5 V V <sub>IH</sub> = 2.4 V	-	0.3	-	0.4	
V <sub>OH</sub>	High output voltage	I <sub>OH</sub> = -1.0 mA V <sub>CC</sub> = 4.5 V V <sub>IL</sub> = 0.8 V	3.6	-	3.5	-	
R <sub>i</sub>	Input resistance	V <sub>CC</sub> = 5.0 V	3.0	7.0	-	-	

## Transmitter electrical parameters

V <sub>OL</sub>	Low output voltage	V <sub>CC</sub> = 4.5 V V <sub>IH</sub> = 2.0 V R <sub>L</sub> = 3.0 kOhm	-	-5.2	-	-5.0	V
V <sub>OH</sub>	High output voltage	V <sub>CC</sub> = 4.5 V V <sub>IL</sub> = 0.8 V R <sub>L</sub> = 3.0 kOhm	5.2	-	5.0	-	
I <sub>IL</sub>	Low input current	V <sub>CC</sub> = 5.5 V V <sub>IL</sub> = 0 V	-	170	-	200	MkA
I <sub>sc</sub>	Short-circuit output current	V <sub>CC</sub> = 5.5 V V <sub>O</sub> = 0 V V <sub>IL</sub> = 0 V		-50		-60	mA
		V <sub>CC</sub> = 5.5 V V <sub>O</sub> = 0 V V <sub>IH</sub> = V <sub>CC</sub>		50		60	
R <sub>o</sub>	Output resistance	V <sub>CC</sub> =V+=V-= 0 V V <sub>O</sub> = ±2 V	350	-	300	-	Ohm
SR	Speed of output front change	V <sub>CC</sub> = 5.0 V, C <sub>L</sub> = 50-1000 pF R <sub>L</sub> = 3-7 kOhm	3.0	30	-	-	V/mksec
ST	Information transmission speed	V <sub>CC</sub> = 4.5 V, R <sub>L</sub> = 3 kOhm, C <sub>L</sub> = 1000 pF, t <sub>w</sub> = 7 mksec	140	-	120	-	Kbit/sec
ST	Information transmission speed	V <sub>CC</sub> = 4.5 V, R <sub>L</sub> = 3 kOhm, C <sub>L</sub> = 1000 pF, t <sub>w</sub> = 7 mksec	140	-	120	-	Kbit/sec



# ILX208DW

## Dynamic parameters ( $t_{LH} = t_{HL} \leq 10$ nsec)

Symbol	Parameter	Test conditions	Rate				Unit	
			25°C		from -40 to 85°C			
			min	max	min	max		
$t_{PHLR}$ ( $t_{PLHR}$ )	Signal propagation delay time when switching on (off)	$V_{CC} = 4.5$ V $C_L = 150$ pF $V_{IL} = 0$ V $V_{IH} = 3.0$ V	-	9.7	-	10.0	mksec	
$t_{PHLT}$ ( $t_{PLHT}$ )	Signal propagation delay time when switching on (off)	$V_{CC} = 4.5$ V $C_L = 2500$ pF $V_{IL} = 0$ V $V_{IH} = 3.0$ V $R_L = 3$ kOhm		5.0*		6.0*		

\* Parameter ratings will be specified during experimental design

## Timing diagrams when measuring IC dynamic parameters

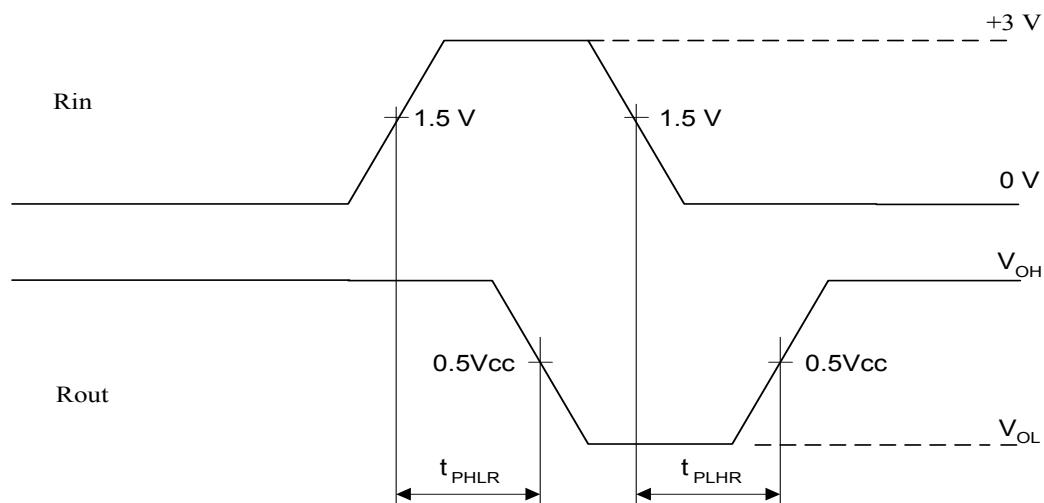


Figure 3 - Timing diagram when measuring propagation delay time when switching on  $t_{PHLR}$ , propagation delay time when switching off  $t_{PLHR}$

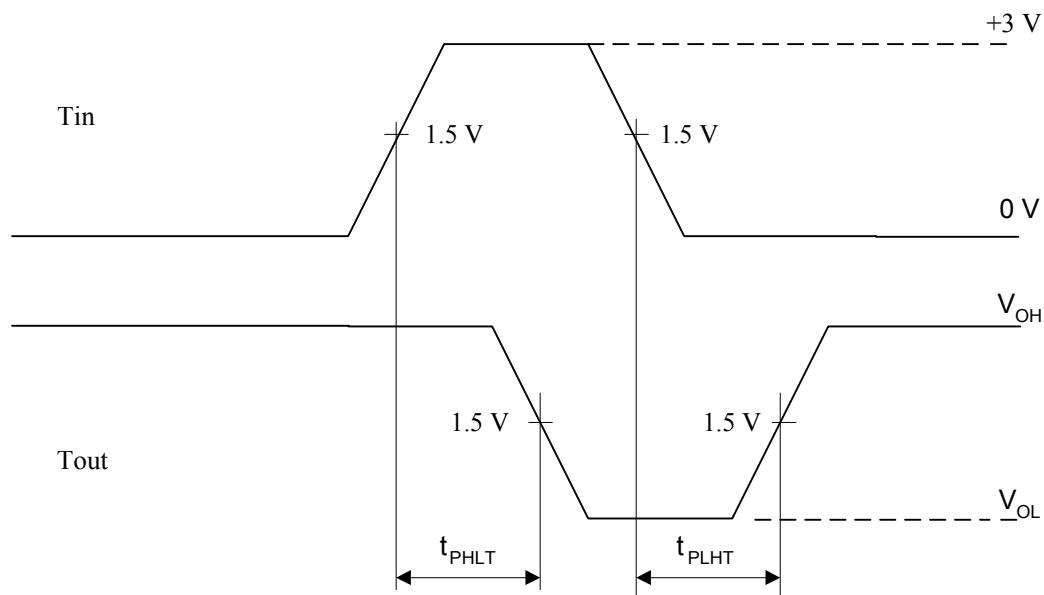


Figure 4 – Timing diagram when measuring propagation delay time when switching on  $t_{PHLT}$ , propagation delay time when switching off  $t_{PLHT}$

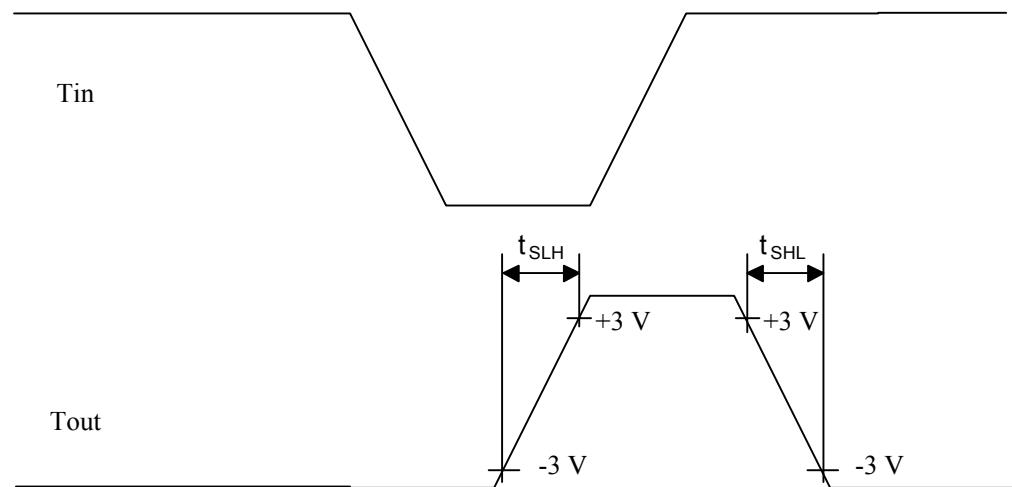


Figure 5 – Timing diagram of signals when measuring speed of output voltage SR change


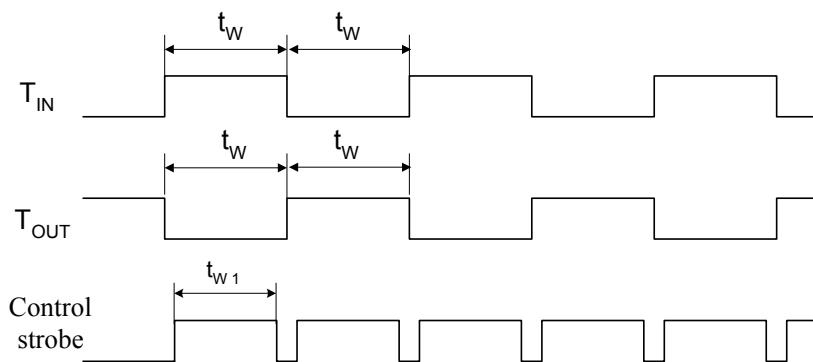


Figure 6 – Timing diagram of signals when measuring speed of information ST transmission

### Package overall dimensions

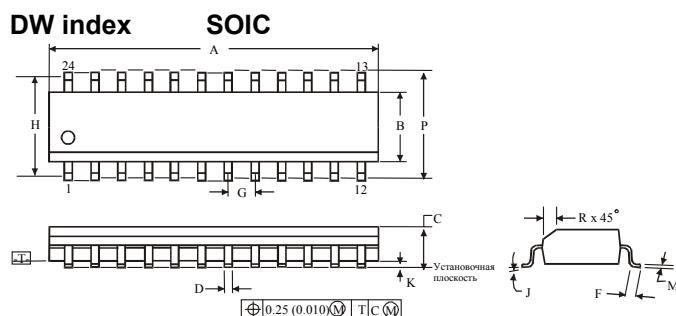

**4322.24-A**

**Note:**

1. Overall dimensions A and B are specified without taking fin and metal protuberances into consideration.
2. Presence of fin and metal protuberances for A – up to 0.15 mm (0.006) for side; for B – up to 0.25 mm (0.010) for side.

Sign	Dimensions, mm	
	MIN	MAX
A	15.20	15.60
B	7.40	7.60
C	2.35	2.65
D	0.33	0.51
F	0.40	1.27
G	1.27	
H	9.53	
J	0°	8°
K	0.10	0.30
M	0.23	0.32
P	10.0	10.65
R	0.25	0.75