

IS456

High Speed Response Type OPIC Light Detector

■ Features

1. High speed response (t_{PHL} : TYP.230ns)
2. Uses a pattern to allow for possible positional deviation of the semiconductor laser spot.
3. Compact, mini-flat package

■ Applications

1. Laser beam printers


■ Absolute Maximum Ratings

(Ta= 25°C)

Parameter	Symbol	Rating	Unit
* ¹ Supply voltage	V _{CC}	-0.5 to + 7	V
High level output voltage	V _{OH}	7	V
Low level output current	I _{OL}	20	mA
Operating temperature	T _{opr}	-25 to + 80	°C
Storage temperature	T _{stg}	-40 to + 85	°C
* ² Soldering temperature	T _{sot}	260	°C
Power dissipation	P	150	mW
R _O terminal power dissipation	P _{RO}	24	mW
* ³ Incident light intensity	P _I	5	mW
* ³ Radiant intensity	E _e	60	WB


*1 For 1 minute

*2 For 3 seconds at the position shown in the following drawing.

*3 Maximum allowable incident light intensity and radiant intensity of laser beam ($\lambda = 780\text{nm}$) to the device.

■ Outline Dimensions

(Unit : mm)

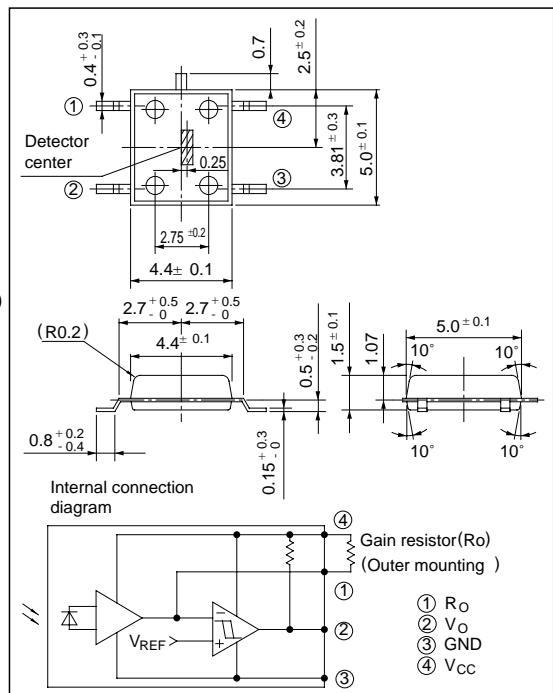

*“OPIC” (Optical IC) is a trademark of the SHARP Corporation.
An OPIC consists of a light-detecting element and signal-processing circuit integrated onto a single chip.

■ Electro-optical Characteristics

(V_{CC} = 5V, Ta= 25°C)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit	
High level output voltage	V _{OH}	R _O =51kΩ, E _v =0	4.9	-	-	V	
Low level output voltage	V _{OL}	I _{OL} =10mA, E _v =1 000lx	-	0.4	0.6	V	
High level supply current	I _{CCH}	R _O =51kΩ, E _v =0	-	2.6	4.5	mA	
Low level supply current	I _{CCL}	R _O =51kΩ, E _v =1 000lx	-	3.8	6.6	mA	
* ⁴ “High→Low” threshold illuminance 1	E _{VHL1}	R _O =51kΩ	330	470	600	lx	
* ⁴ “High→Low” threshold illuminance 2	E _{VHL2}	R _O =5.1kΩ	-	5 800	-	lx	
“High→Low” threshold incident light intensity	P _{IHL}	R _O =5.1kΩ, λ =780nm	-	100	-	μW	
Response time	“High→Low” propagation delay time	t _{PHL}	C _L =15pF, Duty=1: 1	-	230	400	ns
	“Low→High” propagation delay time	t _{PLH}	P _I =0.2mW, λ =780nm	-	230	400	ns
	Rise time	t _r	R _O =5.1kΩ, R _L =510Ω	-	60	200	ns
	Fall time	t _f		-	20	100	ns

*4 E_{VHL1}, E_{VHL2} represent illuminance by CIE standard light source A(tungsten lamp) when output goes from high to low.

■ Recommended Operating Conditions

Parameter	Symbol	MIN.	MAX.	Unit
Operating supply voltage	V _{cc}	4.5	5.5	V
Operating temperature	T _{opr}	0	60	°C
Incident light intensity ($\lambda = 780\text{nm}$)	P _I	-	2.5	mW

In order to stabilize power supply line, connect a by-pass capacitor of $0.1\mu\text{F}$ between V_{cc} and GND near the device.

Fig. 1 Total Power Dissipation vs. Ambient Temperature

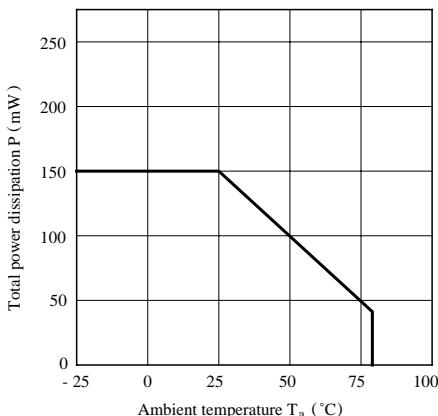


Fig. 2 Low Level Output Voltage vs. Low Level Output Current

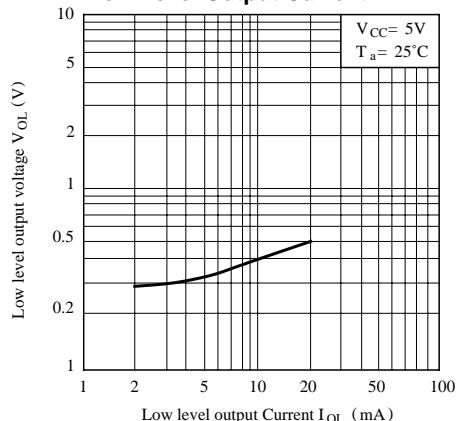


Fig. 3 Low Level Output Voltage vs. Ambient Temperature

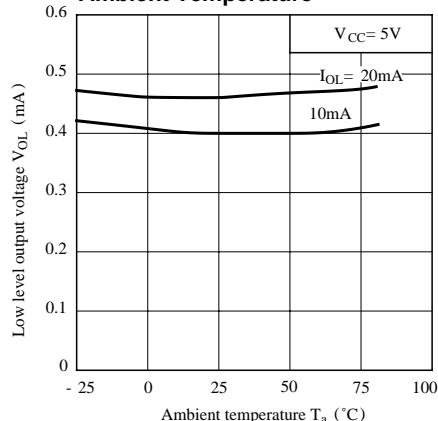
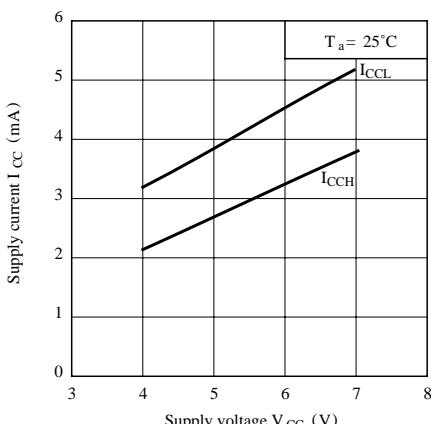


Fig. 4 Supply Current vs. Supply Voltage



**Fig. 5 Supply Current vs.
Ambient Temperature**

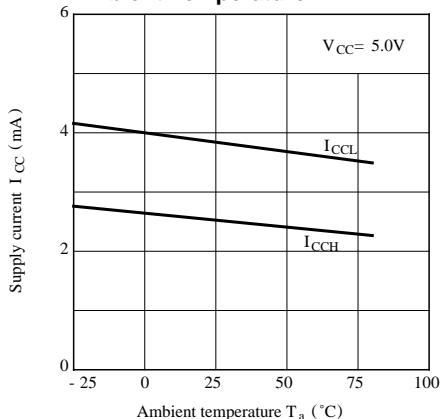
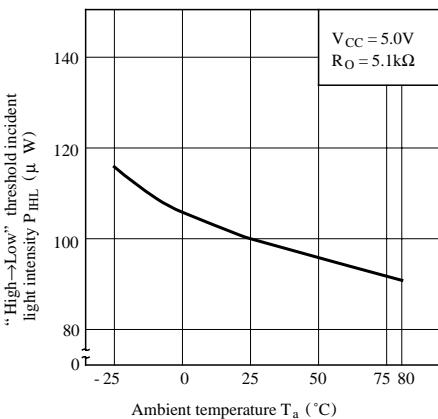


Fig. 7 "High→Low" Threshold Incident Light Intensity vs. Ambient Temperature



**Fig. 9 Propagation Delay Time vs.
Incident Light Intensity**

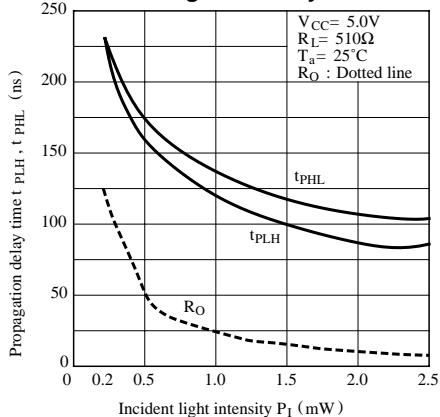


Fig. 6 "High→Low" Threshold Incident Light Intensity vs. Gain Resistance

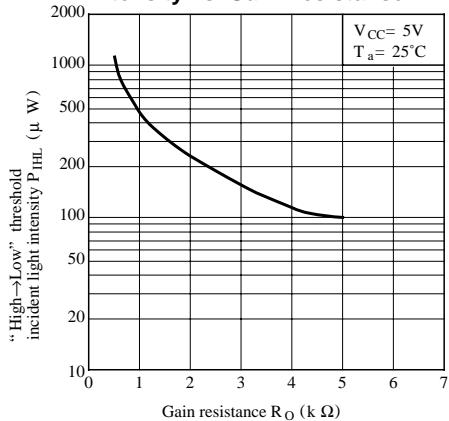
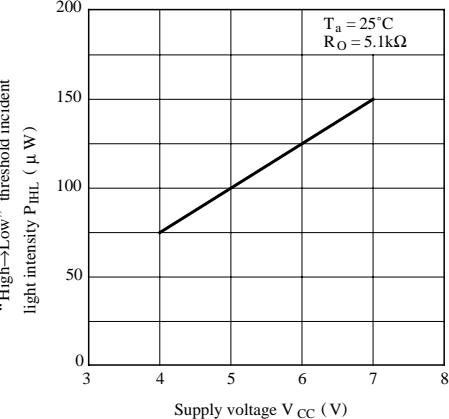


Fig. 8 "High→Low" Threshold Incident Light Intensity vs. Supply Voltage



**Fig. 10 Propagation Delay Time vs.
Gain Resistance**

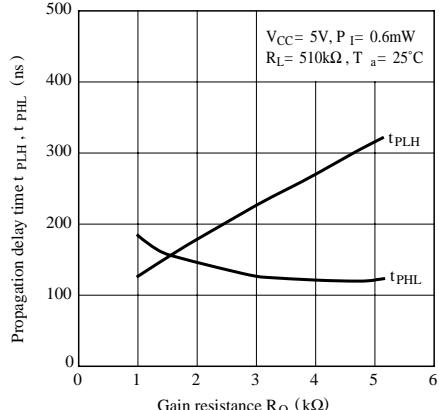


Fig.11 Propagation Delay Time vs. Ambient Temperature

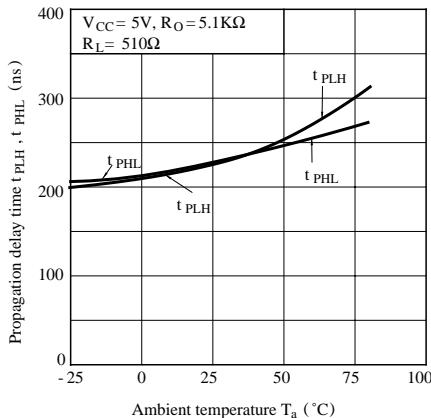


Fig.13 Rise Time, Fall Time vs. Ambient Temperature

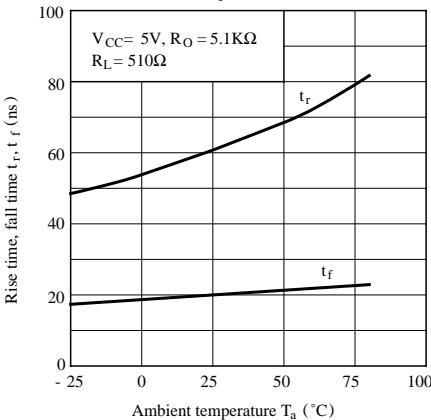


Fig.12 Rise Time, Fall Time vs. Load Resistance




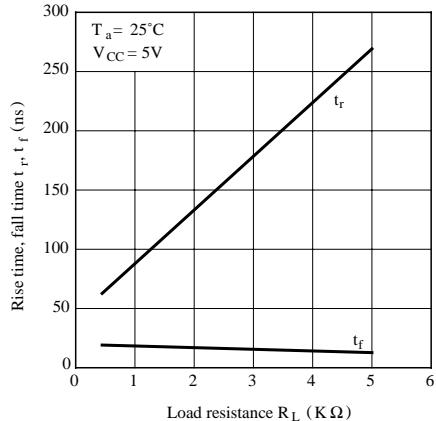


Fig.14 Spectral Sensitivity

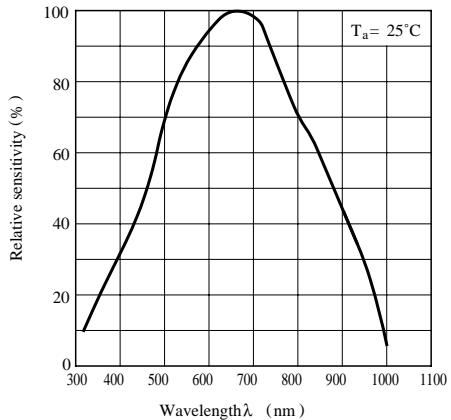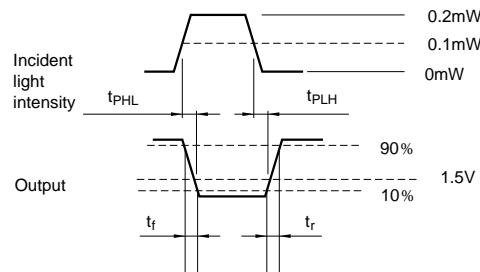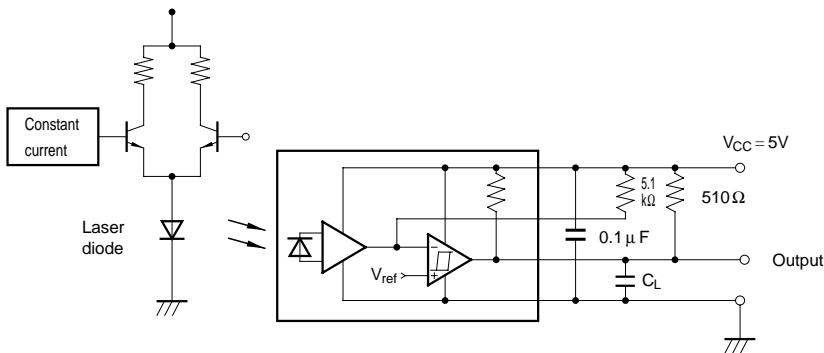

Test Circuit for Response Time

- Please refer to the chapter "Precautions for Use."