

# SHINDENGEN

## General Purpose Rectifiers

Low Noise Bridges

**LN1VB60**

**600V 1.2A**

### FEATURES

Low noise  
Small Single In-Line (:SIL) Package  
Applicable to Automatic Insertion



### APPLICATION

Adapter  
Switching power supply  
Home Appliances, Office Equipment,  
Telecommunication

### OUTLINE DIMENSIONS

Case : 1V

(Unit : mm)

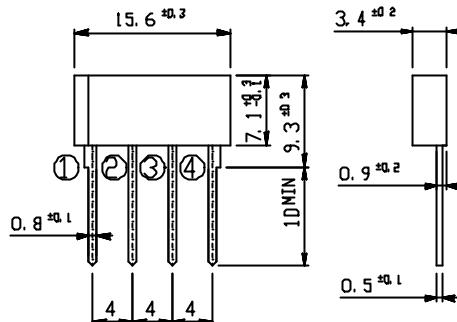

### RATINGS

Absolute Maximum Ratings (If not specified  $T_i=25^\circ C$ )


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	$T_{stg}$		-40 ~ 150	
Operating Junction Temperature	$T_j$		150	
Maximum Reverse Voltage	$V_{RM}$		600	V
Average Rectified Forward Current	$I_o$	50Hz sine wave, R-load, $T_a=25^\circ C$	1.2	A
Peak Surge Forward Current	$I_{FSM}$	50Hz sine wave, Non-repetitive 1cycle peak value, $T_i=25^\circ C$	50	A
Current Squared Time	$I^2t$	$1ms \leq t < 10ms, T_j=25^\circ C$	6	$A^2s$

Electrical Characteristics (If not specified  $T_i=25^\circ C$ )


Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	$V_F$	$I_F=0.6A$ , Pulse measurement, Rating of per diode	Max. 1.0	V
Reverse Current	$I_R$	$V_R=V_{RM}$ , Pulse measurement, Rating of per diode	Max. 10	$\mu A$
Reverse Recovery Time	$t_{rr}$	$I_F=0.1A, I_R=0.1A$ , Rating of per diode	Max. 5	$\mu s$
Thermal Resistance	$j_l$	junction to lead	Max. 16	/W
	$j_a$	junction to ambient	Max. 62	

# LN1VB60

## Forward Voltage

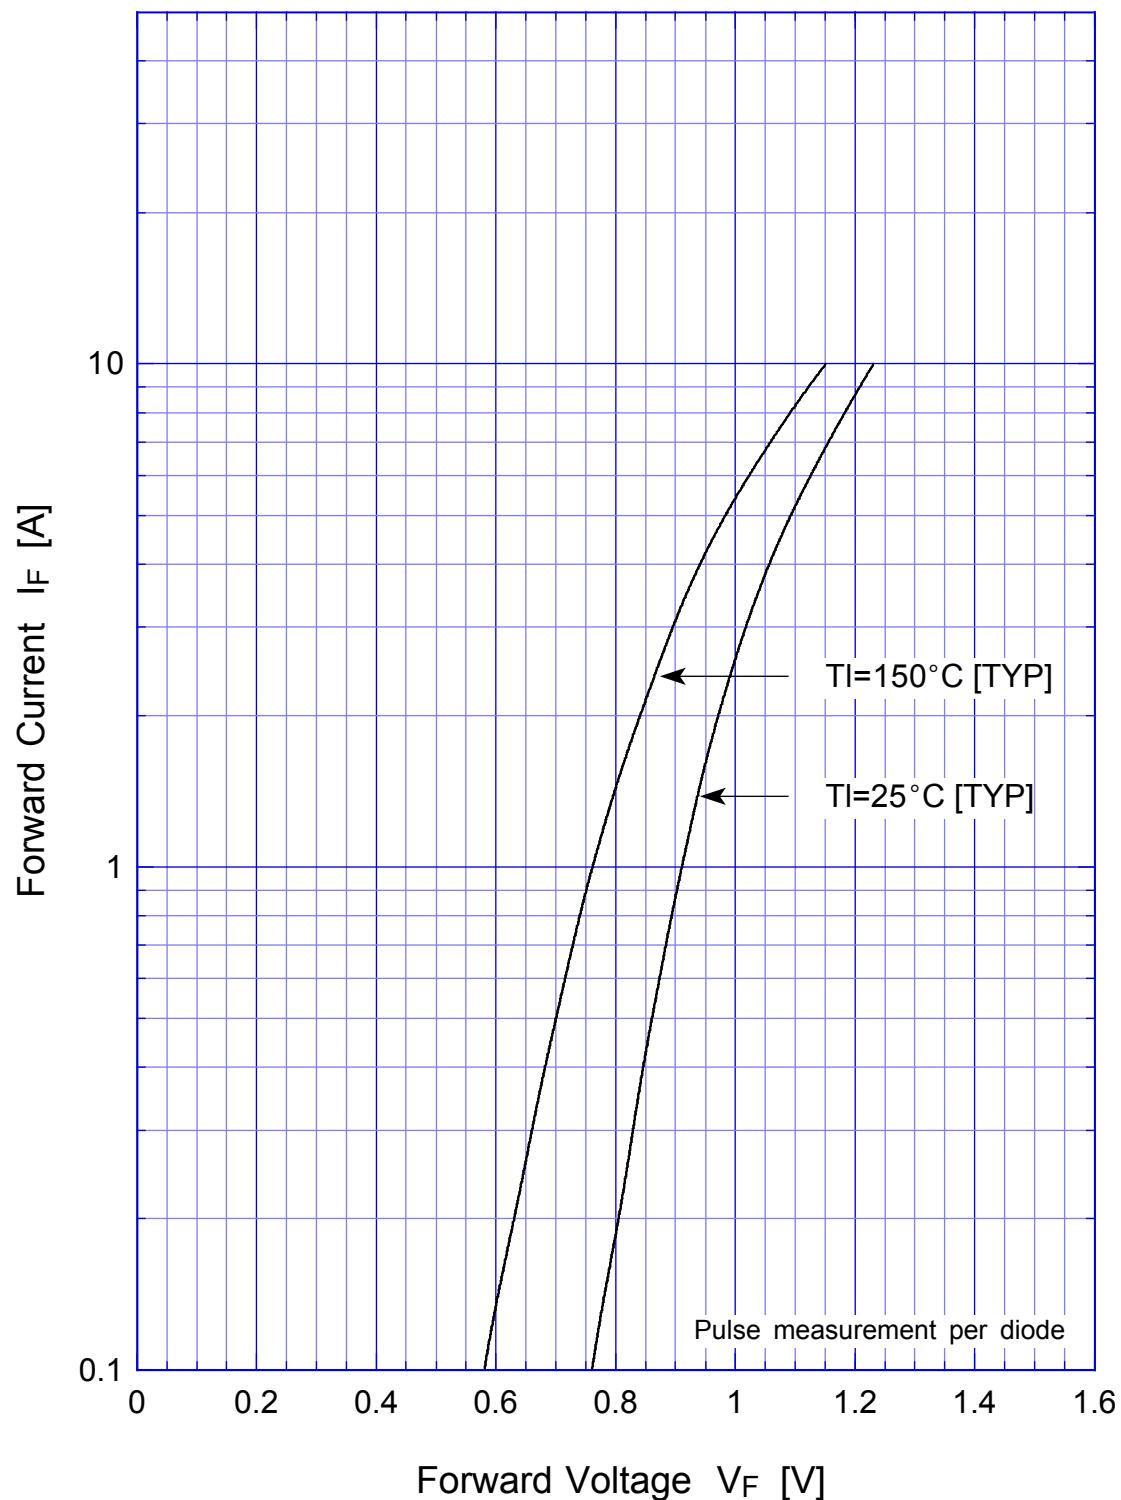


## LN1VB60    Forward Power Dissipation

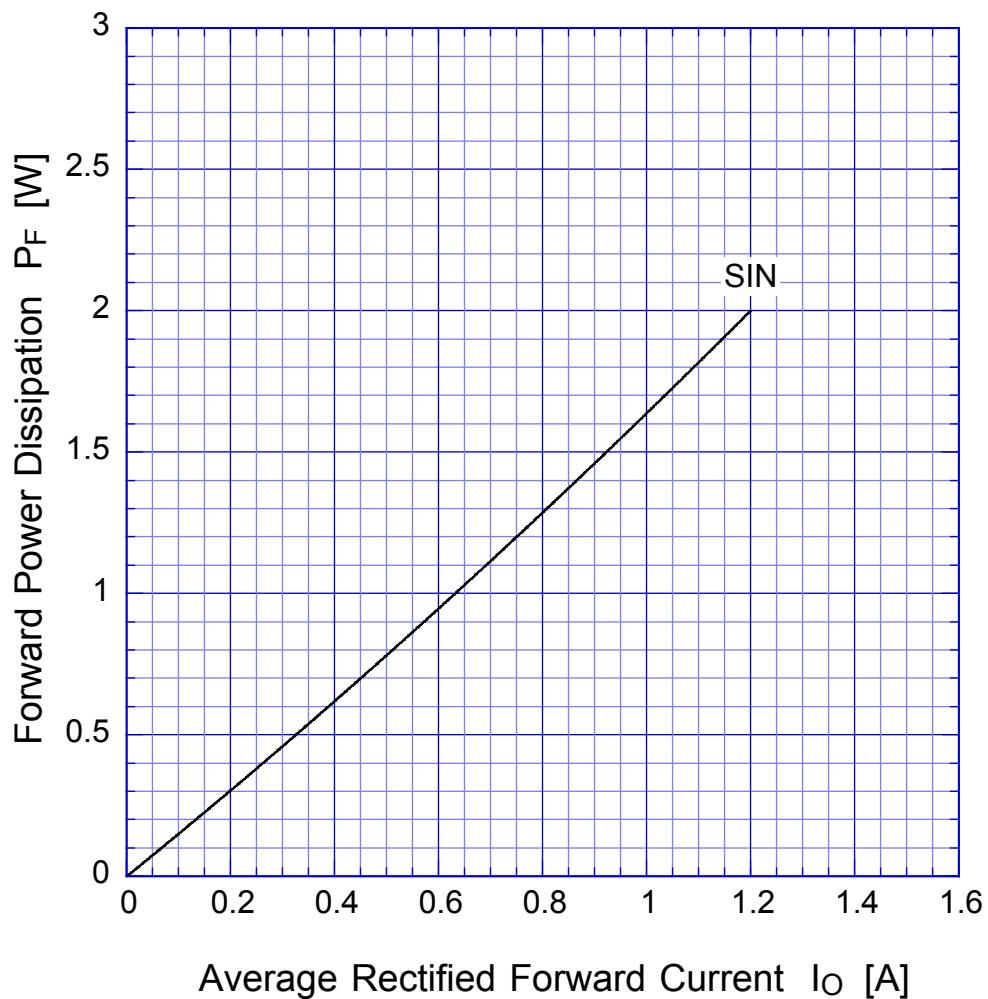


$T_j = 150^\circ\text{C}$   
Sine wave

**LN1VB60**

Derating Curve

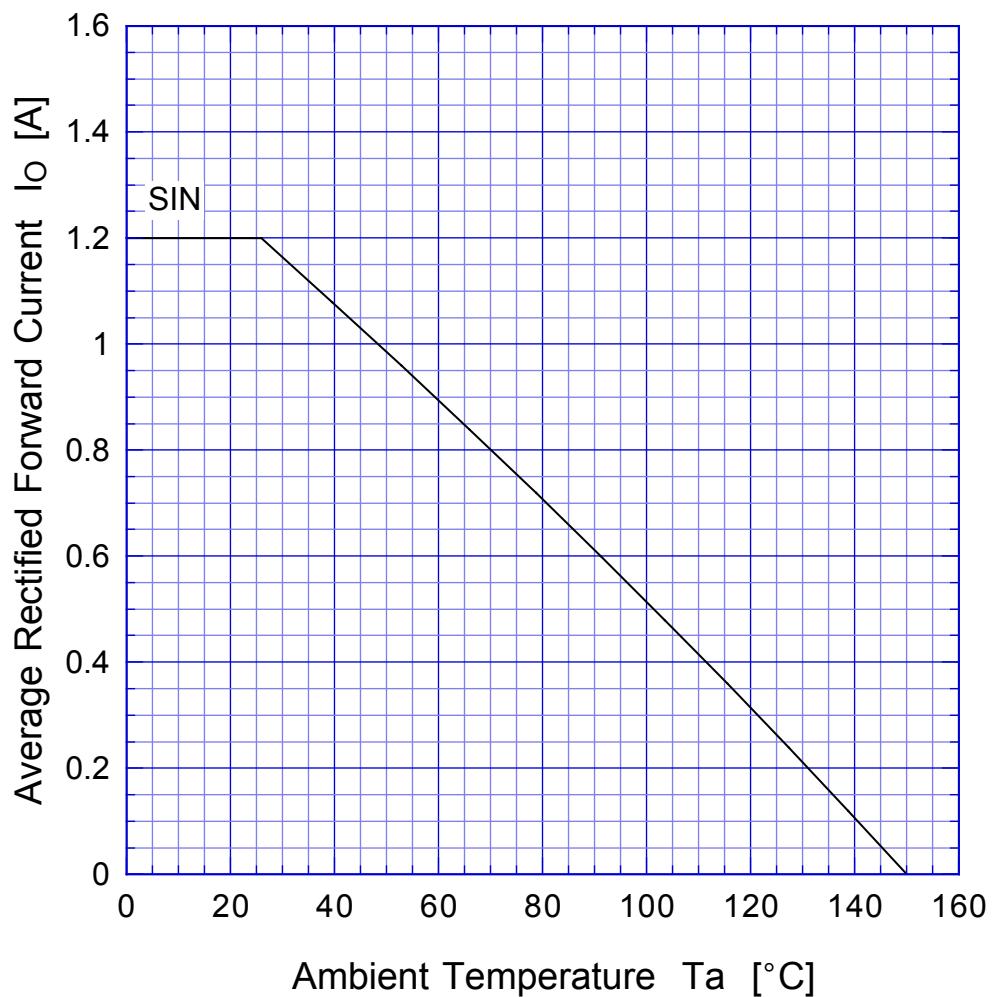

$V_R = 600V$

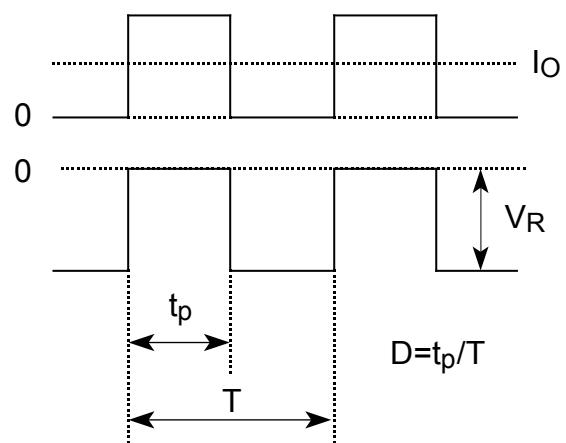

# LN1VB60

## Peak Surge Forward Capability

