



**RO2102A-1**


**423.22 MHz  
SAW  
Resonator**

- **Ideal for 423.22 MHz LOs in Superhet Receivers**
- **Low Series Resistance**
- **Quartz Stability**
- **Surface-Mount, Ceramic Case with 21 mm<sup>2</sup> Footprint**
- **Complies with Directive 2002/95/EC (RoHS)**

The RO2102a-1 is a true one-port, surface-acoustic-wave (SAW) resonator in a surface-mount, ceramic case. It provides reliable, fundamental-mode, quartz frequency stabilization of fixed-frequency oscillators operating at 423.22 MHz. The RO2102A-1 is designed specifically for the LO of 433.92 MHz superhet receivers in remote-control and wireless security applications operating under ETSI I-ETS 300 220 in Europe.

**Absolute Maximum Ratings**

Rating	Value	Units
CW RF Power Dissipation	+10	dBm
DC Voltage Between Terminals (Observe ESD Precautions)	±30	VDC
Case Temperature <sup>1</sup>	-40 to +85	°C
Soldering Temperature (10 seconds / 5 cycles max.)	260	°C



**SM-2 Case**

**Electrical Characteristics**

Characteristic	Sym	Notes	Minimum	Typical	Maximum	Units
Center Frequency at +25 °C	Absolute Frequency	$f_C$		423.22		MHz
	Tolerance from 423.22 MHz	$\Delta f_C$	2, 3, 4, 5		±50	kHz
Insertion Loss	IL	2, 5, 6		1.1	2.0	dB
Quality Factor	Unloaded Q	$Q_U$		16,350		
	50 Ω Loaded Q	$Q_L$	5, 6, 7	1,950		
Temperature Stability	Turnover Temperature	$T_O$	10	25	40	°C
	Turnover Frequency	$f_O$	6, 7, 8	$f_C$		kHz
	Frequency Temperature Coefficient	FTC		0.032		ppm/°C <sup>2</sup>
Frequency Aging	Absolute Value during the First Year	fA	1	≤10		ppm/yr
DC Insulation Resistance between Any Two Terminals		5	1.0			MΩ
RF Equivalent RLC Model	Motional Resistance	$R_M$		13.5	26	Ω
	Motional Inductance	$L_M$	5, 7, 9	83.0050		μH
	Motional Capacitance	$C_M$		1.703730		fF
	Transducer Static Capacitance	$C_O$	5, 6, 9	1.7		pF
Test Fixture Shunt Inductance	$L_{TEST}$	2, 7		77.62		nH
Lid Symbolization	146					




**CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.**

**Notes:**


- Lifetime (10 year frequency aging).
- The center frequency,  $f_C$ , is measured at the minimum insertion loss point,  $IL_{MIN}$ , with the resonator in the 50 Ω test system ( $VSWR \leq 1.2:1$ ). The shunt inductance,  $L_{TEST}$ , is tuned for parallel resonance with  $C_O$  at  $f_C$ .
- One or more of the following United States patents apply: 4,454,488 and 4,616,197.
- Typically, equipment utilizing this device requires emissions testing and government approval, which is the responsibility of the equipment manufacturer.
- Unless noted otherwise, case temperature  $T_C = +25^\circ\text{C} \pm 2^\circ\text{C}$ .
- The design, manufacturing process, and specifications of this device are subject to change without notice.
- Derived mathematically from one or more of the following directly measured parameters:  $f_C$ , IL, 3 dB bandwidth,  $f_C$  versus  $T_C$ , and  $C_O$ .
- Turnover temperature,  $T_O$ , is the temperature of maximum (or turnover) frequency,  $f_O$ . The nominal frequency at any case temperature,  $T_C$ , may be calculated from:  $f = f_O [1 - FTC (T_O - T_C)^2]$ .
- This equivalent RLC model approximates resonator performance near the resonant frequency and is provided for reference only. The capacitance  $C_O$  is the static (nonmotional) capacitance between the two terminals measured at low frequency (10 MHz) with a capacitance meter. The measurement includes parasitic capacitance with a floating case. For usual grounded case applications (with ground connected to either pin 1 or pin 2 and to the case), add approximately 0.25 pF to  $C_O$ .
- Packaged in 500PC Tape carrier.

## Electrical Connections

The SAW resonator is bidirectional and may be installed with either orientation. The two terminals are interchangeable and unnumbered. The callout NC indicates no internal connection. The NC pads assist with mechanical positioning and stability. External grounding of the NC pads is recommended to help reduce parasitic capacitance in the circuit.




## Equivalent LC Model

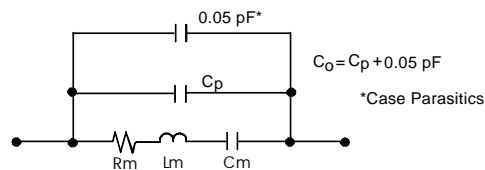


## Typical Test Circuit

The test circuit inductor,  $L_{TEST}$ , is tuned to resonate with the static capacitance,  $C_0$ , at  $F_C$ .

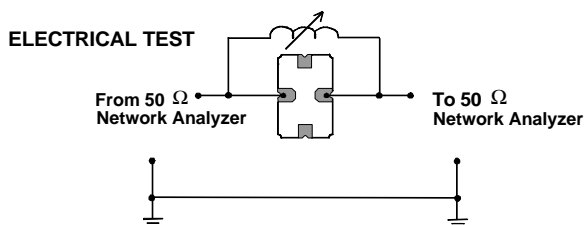


## POWER TEST

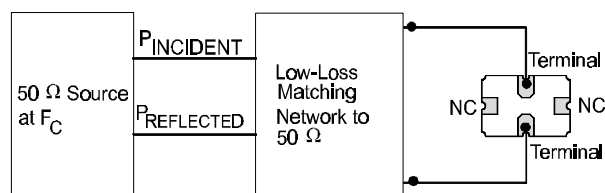


$$\text{CW RF Power Dissipation} = P_{INCIDENT} - P_{REFLECTED}$$

## Typical Application Circuits

### Typical Low-Power Transmitter Application

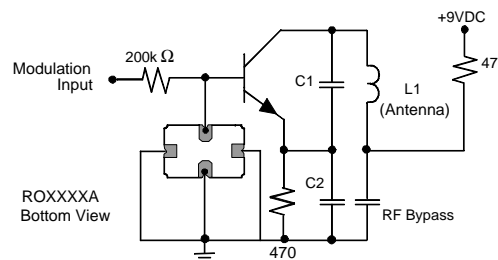


### Typical Local Oscillator Application

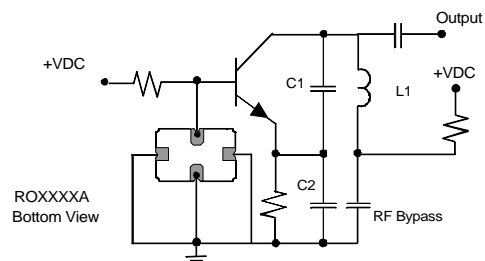


## Temperature Characteristics

The curve shown on the right accounts for resonator contribution only and does not include LC component temperature contributions.




## Typical Circuit Board Land Pattern

The circuit board land pattern shown below is one possible design. The optimum land pattern is dependent on the circuit board assembly process which varies by manufacturer. The distance between adjacent land edges should be at a maximum to minimize parasitic capacitance. Trace lengths from terminal lands to other components should be short and wide to minimize parasitic series inductances.

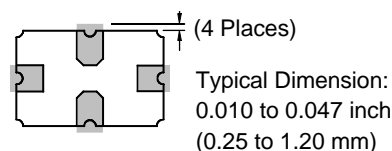

## Case Design

The case material is black alumina with contrasting symbolization. All pads are nominally centered with respect to the base and consist of 40 to 70 microinches electroless gold on 60-350 microrinches electroless nickel.

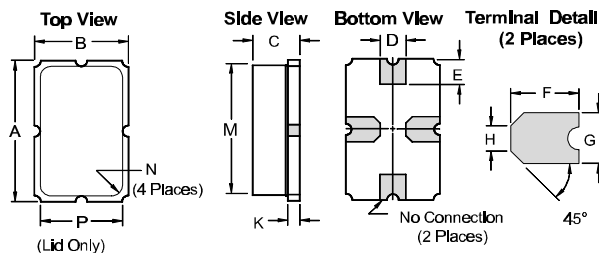

Dimensions	Millimeters		Inches	
	Min	Max	Min	Max
A	5.74	5.99	0.226	0.236
B	3.73	3.99	0.147	0.157
C	1.91	2.16	0.075	0.085
D	0.94	1.10	0.037	0.043
E	0.83	1.20	0.033	0.047
F	1.16	1.53	0.046	0.060
G	0.94	1.10	0.037	0.043
H	0.43	0.59	0.017	0.023
K	0.43	0.59	0.017	0.023
M	5.08	5.33	0.200	0.210
N	0.38	0.64	0.015	0.025
P	3.05	3.30	0.120	0.130