

**1024K (128K × 8) CMOS UV ERASABLE PROM**

ADVANCED DATA

- 8 BITS OUTPUTS
- FAST ACCESS TIME 120ns.
- LOW "CMOS" CONSUMPTION 50mA (MAX.)
- PROGRAMMING VOLTAGE 12.5V
- ELECTRONIC SIGNATURE FOR AUTOMATED PROGRAMMING
- PROGRAMMING TIMES IN THE 20 SECONDS RANGE.

**DESCRIPTION**

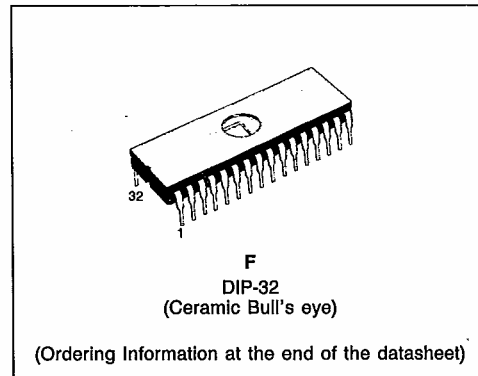
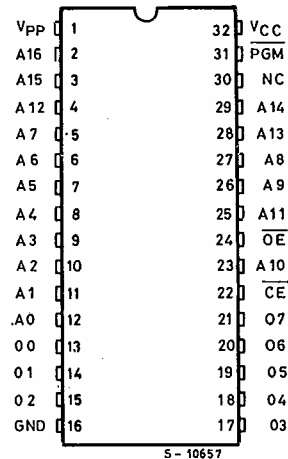
The ST27C1001 is a high speed 1 Mbit UV erasable and electrically programmable EPROM ideally suited for 8-bit microprocessors systems requiring large programs.

It is organized as 131072 words by 8 bits, and packaged in a 32 pins Ceramic DIP Bull's eye package. ST will also introduce the following versions based on the same architecture but with different configurations. They are:

- ST27C1011 is a page addressed 1024K (8 × 16K × 8) device, packaged in a 28 pin DIP for easy replacement of 64K and 128K standard EPROM versions.
- ST87C1011 is the same device as the ST27C1011 with latched addresses for design optimization in multiplexed bus environment.
- ST27C1000 is organized as 128K × 8 bits with a ROM compatible pinout.
- ST87C1000 is the same device as the ST27C1000 with latched addresses for design optimization in multiplexed bus environment.

**PIN NAMES**

A0—A16	ADDRESS INPUT
$\overline{CE}$	CHIP ENABLE INPUT
$\overline{OE}$	OUTPUT ENABLE
PGM	PROGRAM
O <sub>0</sub> -O <sub>7</sub>	DATA INPUT/OUTPUT
NC	NON CONNECTED


**PIN CONNECTIONS**


June 1988

This is advance information on a new product now in development or undergoing evaluation. Details are subject to change without notice.

1/2

131

