



Weltrend Semiconductor, Inc.

WT6805
Monitor On-Screen Display

Preliminary Data Sheet

REV. 1.0

December 3, 2001

The information in this document is subject to change without notice.
©Weltrend Semiconductor, Inc. All Rights Reserved.

2F, No. 24, Industry E. 9th RD., Science-Based Industrial Park, Hsin-Chu, Taiwan
TEL:886-3-5780241 FAX:886-3-5794278.5770419
Email:support@weltrend.com.tw

GENERAL DESCRIPTION


The WT6805 is an on-screen display (OSD) IC which display color symbols or characters onto monitor. With the control of microcontroller through I²C interface, it can display characters with special effect like blinking or shadowing automatically.

FEATURES

- Programmable horizontal resolutions up to 1530 dots per line
- Horizontal frequency up to 150KHz
- On-chip PLL up to 150MHz
- Fully programmable character array of 15 rows by 30 columns
- 12x18 dot matrix per character
- 512 characters and graphic symbols ROM
- 16 multi-color fonts
- 8 user RAM font
- 8 colors per display character
- 7 colors per display character background
- 4 programmable windows
- Double character height and width control
- Programmable character height (18 to 71 lines)
- Programmable row-to-row spacing
- Programmable vertical and horizontal positioning for display screen center
- Bordering, shadowing, blinking and box effect
- Fade-in/fade-out effects
- I²C interface with slave address \$7AH
- Power supply : 5V
- Package type : 16-pin plastic DIP/SOP

PIN ASSIGNMENT AND PACKAGE TYPE

PACKAGE TYPE : PDIP-16, SOP-16

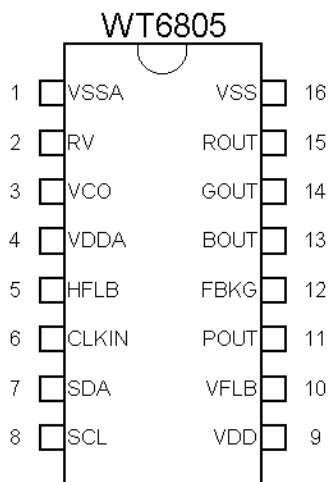

Pin No.	Pin Name	I/O	Description
1	VSSA		Analog ground.
2	RV	I	A resistor can be connected to this pin for control VCO range.
3	VCO	I/O	Loop filter of PLL.
4	VDDA		Analog power supply
5	HFLB	I	Horizontal sync input.
6	CLKIN	I	External clock input.
7	SDA	I/O	Serial data of I ² C interface.
8	SCL	I	Serial clock of I ² C interface.
9	VDD		Digital power supply
10	VFLB	I	Vertical sync input.
11	POUT	O	General purpose output pad
12	FBKG	O	Fast Blanking output. This pin controls the mixer of video amplifier to cutoff the video signal while displaying character or window.
13	BOUT	O	Blue color output
14	GOUT	O	Green color output
15	ROUT	O	Red color output
16	VSS		Digital ground