

SKY73023: 1700 – 2200 MHz High Gain and Linearity Diversity Downconversion Mixer for 2G/3G Base Station Applications

Applications

- 2G/3G base station transceivers:
 - GSM/EDGE, CDMA, UMTS/WCDMA, PHS
- Land mobile radio
- Wireless Local Loop
- High performance radio links
- Private mobile radio

Features

- Operating frequency range: 1700 to 2200 MHz
- IF frequency range: 40 to 300 MHz
- Conversion gain: 8.5 dB
- Input IP3: 25.5 dBm
- Output IP3: 34.0 dBm
- Noise figure: 9.5 dB
- Integrated LO drivers
- Integrated low loss RF baluns
- High linearity IF amplifiers
- On-chip SPDT LO switch (greater than 45 dB LO-to-LO isolation)
- Small, MCM (36-pin, 6 x 6 mm) Pb-free package (MSL3, 260 °C per JEDEC J-STD-020)

NEW Skyworks offers lead (Pb)-free RoHS (Restriction of Hazardous Substances) compliant packaging.




Description

The SKY73023 is a fully integrated diversity mixer that includes Local Oscillator (LO) drivers, an LO switch, high linearity mixers, and large dynamic range Intermediate Frequency (IF) amplifiers. Low loss RF baluns have also been included to reduce design complications and lower system cost.

The SKY73023 features an input IP3 of 25.5 dBm and a Noise Figure (NF) of 9.5 dB, making the device an ideal solution for high dynamic range systems such as 2G/3G base station receivers. The LO switch provides more than 45 dB of isolation between LO inputs and supports the switching time required for GSM/EDGE base stations.


The SKY73023 is manufactured using a robust silicon BiCMOS process and has been designed for optimum long-term reliability. The SKY73023 diversity downconversion mixer is provided in a compact, 36-pin 6 x 6 mm Multi-Chip Module (MCM). A functional block diagram is shown in Figure 1. The pin configuration and package are shown in Figure 2. Signal pin assignments and functional pin descriptions are provided in Table 1.

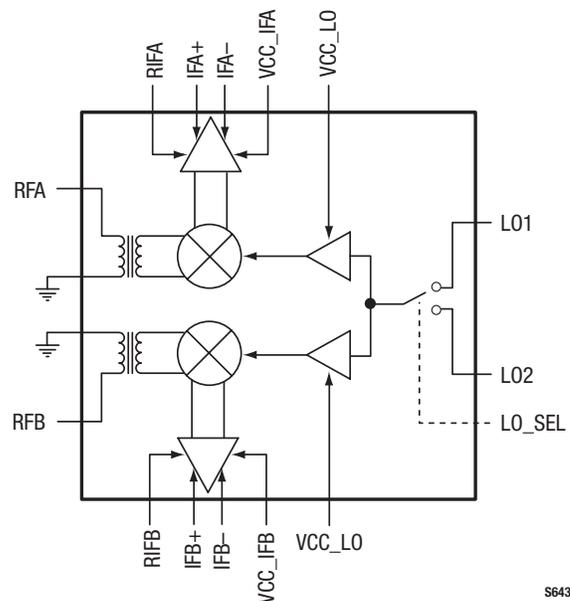

S643

Figure 1. SKY73023 Block Diagram

PRELIMINARY DATA SHEET • SKY73023 DOWNCONVERSION MIXER

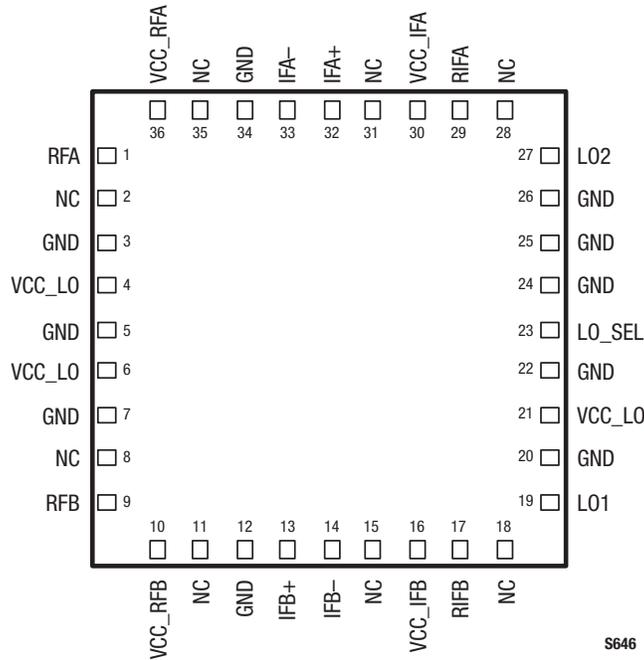

S646

Figure 2. SKY73023 Pinout – 36-Pin MCM

Table 1. SKY73023 Signal Descriptions

| Pin # | Name | Description | Pin # | Name | Description |
|-------|---------|------------------------------|-------|---------|----------------------------------------|
| 1 | RFA | Channel A RF input | 19 | LO1 | Local oscillator 1 input |
| 2 | NC | No connect | 20 | GND | Ground |
| 3 | GND | Ground | 21 | VCC_LO | DC supply, +5 V |
| 4 | VCC_LO | DC supply, +5 V | 22 | GND | Ground |
| 5 | GND | Ground | 23 | LO_SEL | Local oscillator select switch control |
| 6 | VCC_LO | DC supply, +5 V | 24 | GND | Ground |
| 7 | GND | Ground | 25 | GND | Ground |
| 8 | NC | No connect | 26 | GND | Ground |
| 9 | RFB | Channel B RF input | 27 | LO2 | Local oscillator 2 input |
| 10 | VCC_RFB | Channel B RF DC supply, +5 V | 28 | NC | No connect |
| 11 | NC | No connect | 29 | RIFA | Channel A IF bias adjust |
| 12 | GND | Ground | 30 | VCC_IFA | Channel A IF DC supply, +5 V |
| 13 | IFB+ | Positive channel B IF output | 31 | NC | No connect |
| 14 | IFB- | Negative channel B IF output | 32 | IFA+ | Positive channel A IF output |
| 15 | NC | No connect | 33 | IFA- | Negative channel A IF output |
| 16 | VCC_IFB | Channel B IF DC supply, +5 V | 34 | GND | Ground |
| 17 | RIFB | Channel B IF bias adjust | 35 | NC | No connect |
| 18 | NC | No connect | 36 | VCC_RFA | Channel A RF DC supply, +5 V |

Functional Description

The SKY73023 is a high gain diversity mixer, optimized for base station receiver applications. The device consists of two diversity channels (A and B), each consisting of a low loss RF balun, high linearity passive mixer, and a low noise IF amplifier.

Two LO amplifiers (independent of channels A and B) are also included that allow the SKY73023 to connect directly to the output of a Voltage Controlled Oscillator (VCO). This eliminates the extra gain stages needed by most discrete passive mixers. A Single Pole, Double Throw (SPDT) switch has been included to select between two different LO inputs for frequency hopping applications (i.e., GSM).

RF Baluns and Passive Mixer

The RF baluns provide a single ended input, which can easily be matched to 50 Ω using a simple external matching circuit. The RF baluns offer very low loss, and excellent amplitude and phase balance.

The high linearity SKY73023 is a passive, double balanced mixer that provides a very low conversion loss and an excellent 3rd Order Input Intercept Point (IIP3).

Additionally, the balanced nature of the mixer provides for high port-to-port isolation.

LO Buffers and SPDT LO Switch

The LO buffers allow the input power of the SKY73023 to be in the range of ±3 dBm. The LO section is optimized for low-side LO injection. However, each of the two LOs can be driven over a wide frequency range with only slight degradation in performance.

A high isolation SPDT switch allows the SKY73023 to be used for frequency hopping applications. This switch provides greater than 45 dB of LO1 to LO2 isolation:

| LO_SEL Input | LO Path Selected |
|--------------|----------------------|
| High | LO1 (pin 19) enabled |
| Low | LO2 (pin 27) enabled |

For applications that do not require frequency hopping, LO_SEL is fixed to one state and the appropriate LO input is used. An internal pull-down resistor enables the LO2 input.

IF Amplifier

The SKY73023 includes high dynamic range IF amplifiers that follow the passive mixers in the signal path. The outputs require a supply voltage connection using inductive chokes. These choke inductors should be high-Q and have the ability to handle 200 mA or greater.

A simple matching network allows the output ports to be matched to a balanced 200 Ω impedance. The IF amplifiers are optimized for IF frequencies between 40 and 300 MHz. The IF amplifiers can be operated outside of this range, but with a slight degradation in performance.

Electrical and Mechanical Specifications

The absolute maximum ratings of the SKY73023 are provided in Table 2 and the recommended operating conditions in Table 3. Electrical characteristics for the SKY73023 are provided in Table 4.

Table 2. SKY73023 Absolute Maximum Ratings

| Parameter | Symbol | Minimum | Maximum | Units |
|------------------------------------|------------------|---------|---------|-------|
| Supply voltage, +5 V (VCC1 – VCC7) | VCC | 4.5 | 5.5 | V |
| Supply current | I _{CC} | | 440 | mA |
| RF input power | P _{RF} | | 20 | dBm |
| LO input power | P _{LO} | | 6 | dBm |
| Operating case temperature | T _C | –40 | +85 | °C |
| Junction temperature | T _J | | 150 | °C |
| Storage case temperature | T _{STG} | –40 | +125 | °C |

Notes: Exposure to maximum rating conditions for extended periods may reduce device reliability. There is no damage to device with only one parameter set at the limit and all other parameters set at or below their nominal value.

Nominal thermal resistance (junction to center ground pad) is 5.1 °C/W.

Table 3. SKY73023 Recommended Operating Conditions

| Parameter | Symbol | Minimum | Typical | Maximum | Units |
|------------------------------------|-------------------|---------|---------|---------|--------|
| Supply voltage, +5 V (VCC1 – VCC7) | VCC | 4.75 | 5.00 | 5.25 | V |
| Supply current | I _{CC} | | 375 | | mA |
| LO input power | P _{LO} | -3 | 0 | +3 | dBm |
| LO select input: high low | LO_SELH LO_SEL | 2.2 | | 0.8 | V V |
| Operating case temperature | T _c | -40 | | +85 | °C |
| RF frequency range | F _{RF} | 1700 | | 2200 | MHz |
| LO frequency range (Note 1) | F _{LO} | 1460 | | 2000 | MHz |
| IF frequency range | F _{IF} | 40 | | 300 | MHz |

Note 1: The SKY73023 has been optimized for low-side LO injection. However, the LO can be used outside of the specified frequency range with degraded performance.

Table 4. SKY73023 Electrical Specifications

(Voltage Supply = +5 V, T_c = +25 °C, LO = 0 dBm, RF Frequency = 1880 MHz, IF Frequency = 200 MHz, LO Frequency = 1680 MHz, Unless Otherwise Noted)

| Parameter | Symbol | Test Condition | Min | Typical | Max | Units |
|---------------------------------------|---------------------|--------------------------------------------------|-----|------------|-----|------------|
| Conversion gain | G | | | 8.5 | | dB |
| Noise Figure | NF | | | 9.5 | | dB |
| Noise Figure with a blocker signal | NF _{BLK} | Blocking signal input power = +8 dBm | | 18 | | dB |
| Third order input intercept point | IIP3 | Tone space = 800 kHz, input tone power = -10 dBm | | 25.5 | | dBm |
| Third order output intercept point | OIP3 | Tone space = 800 kHz, input tone power = -10 dBm | | 34.0 | | dBm |
| 2RF – 2LO | 2x2 | P _{RF} = -10 dBm | | -68 | | dBc |
| 3RF – 3LO | 3x3 | P _{RF} = -10 dBm | | -80 | | dBc |
| Input 1 dB compression point | IP1dB | | | 14.0 | | dBm |
| Output 1 dB compression point | OP1dB | | | 21.5 | | dBm |
| L01-to-L02 isolation | | | | 45 | | dB |
| Channel-to-channel isolation | | | | 45 | | dB |
| RF-to-IF-isolation | | | | 55 | | dB |
| LO leakage: @ RF port @ IF port | | | | -40 -45 | | dBm dBm |
| LO_SEL input | | | -20 | 150 | 250 | µA |
| LO switching time | | | | | 0.5 | µs |
| RF port input return loss | Z _{IN_RF} | With external matching components | -14 | | | dB |
| LO port input return loss | Z _{IN_LO} | With external matching components | -14 | | | dB |
| IF port input return loss | Z _{OUT_IF} | With external matching components | -14 | | | dB |

Evaluation Board Description

The SKY73023 Evaluation Board is used to test the performance of the SKY73023 downconversion mixer. An assembly drawing for the Evaluation Board is shown in Figure 3 and the layer detail is provided in Figure 4. A schematic diagram for the SKY73023 Evaluation Board is shown in Figure 5.

Circuit Design Configurations

The following design considerations are general in nature and must be followed regardless of final use or configuration:

1. Paths to ground should be made as short and as low impedance as possible.
2. The ground pad of the SKY73023 provides critical electrical and thermal functionality. This pad is the main thermal conduit for heat dissipation. Since the circuit board acts as

the heat sink, it must shunt as much heat as possible from the device. Therefore, design the connection to the ground pad to dissipate the maximum heat produced by the circuit board. For more information on soldering the SKY73023, refer to the Package and Handling Information section of this Data Sheet.

3. Skyworks recommends including external bypass capacitors on the VCC voltage inputs of the device.
4. Components L5, L6, L14, and L15 (see Figure 5) are high-Q, low loss inductors. These inductors must be able to pass currents in excess of 200 mA DC.
5. Components R1 and R2 (see Figure 5) allow for external adjustment of the IF amplifier bias points. For operation as specified in Tables 3 and 4, these resistors are not required.



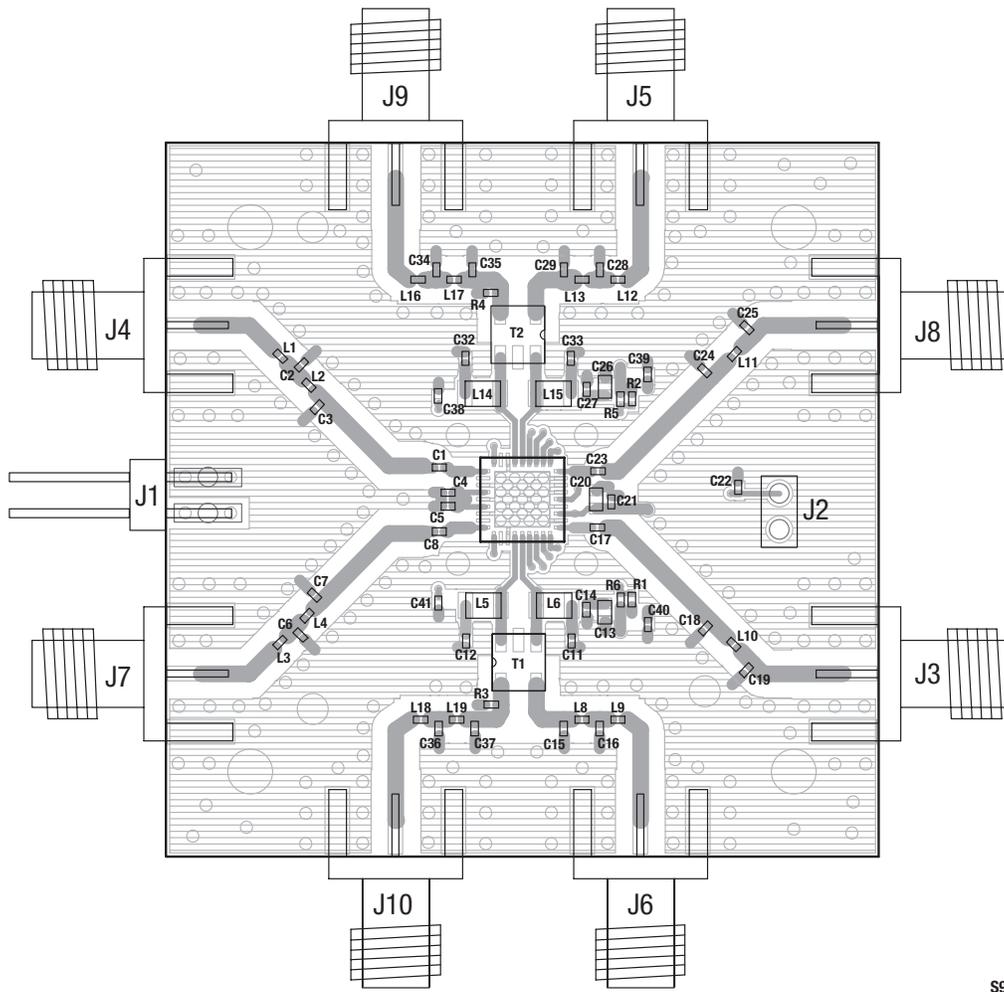


Figure 3. SKY73023 Evaluation Board Assembly Diagram


S905

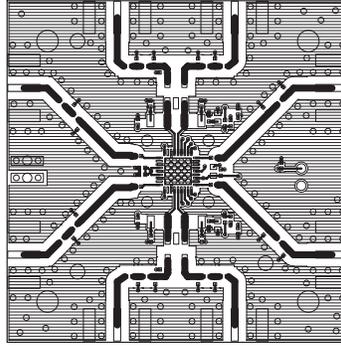


Layer 1: Top -- Metal

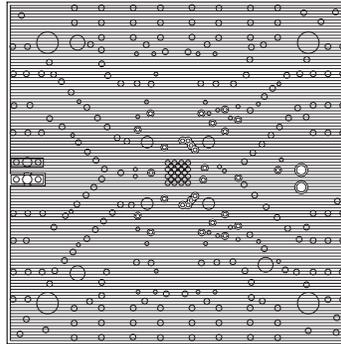

Layer 2: Ground

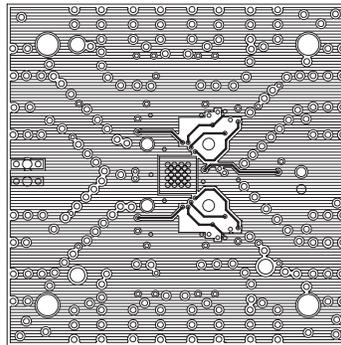


Layer 3: Power Plane

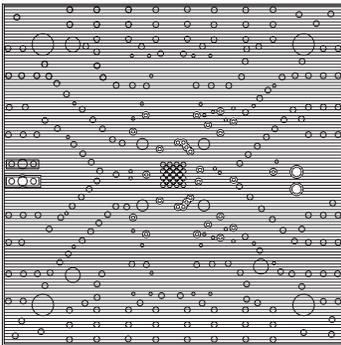

Layer 4: Solid Ground Plane

S904

Figure 4. SKY73023 Evaluation Board Layer Detail

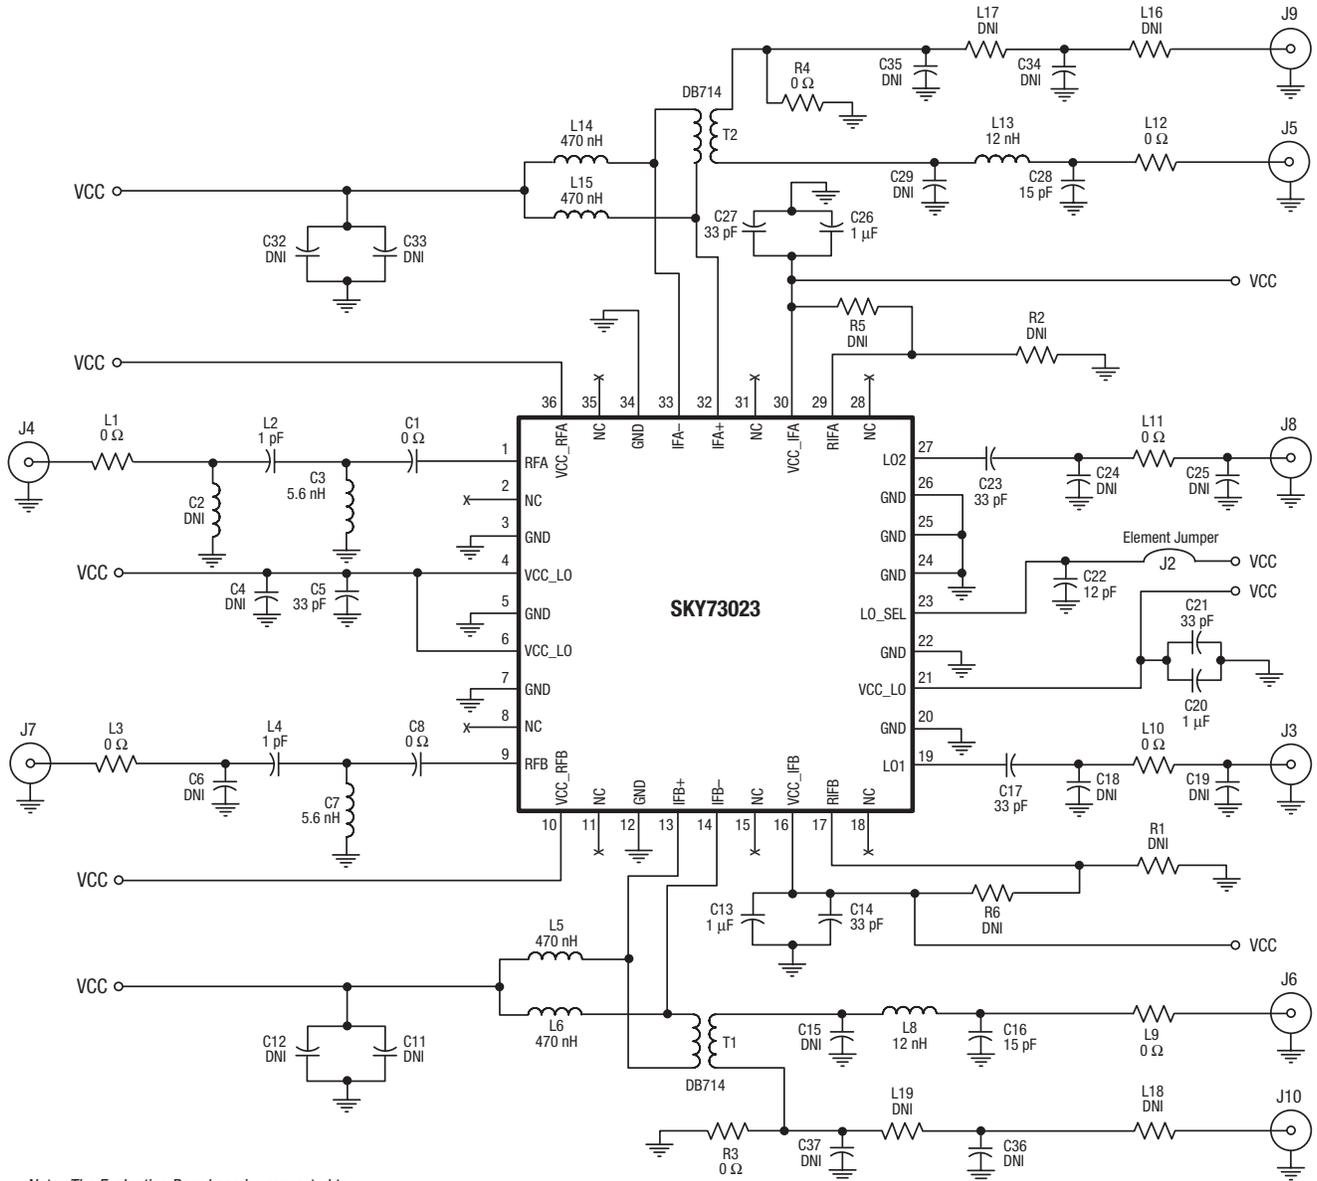

Note: The Evaluation Board can be converted to provide a differential output by removing components T1, T2, R3, and R4.

S947

Figure 5. SKY73023 Evaluation Board Schematic

Package Dimensions

Figure 6 shows the package dimensions for the 36-pin MCM, and Figure 7 provides the tape and reel dimensions.

Package and Handling Information

Since the device package is sensitive to moisture absorption, it is baked and vacuum packed before shipping. Instructions on the shipping container label regarding exposure to moisture after the container seal is broken must be followed. Otherwise, problems related to moisture absorption may occur when the part is subjected to high temperature during solder assembly.


THE SKY73023 is rated to Moisture Sensitivity Level 3 (MSL3) at 260 °C. It can be used for lead or lead-free soldering. For additional information, refer to the Skyworks Application Note,

PCB Design & SMT Assembly/Rework Guidelines for MCM-L Packages, document number 101752.

Care must be taken when attaching this product, whether it is done manually or in a production solder reflow environment. Production quantities of this product are shipped in a standard tape and reel format. For packaging details, refer to the Skyworks Application Note, *Tape and Reel*, document number 101568.

Electrostatic Discharge (ESD) Sensitivity

The SKY73023 is a static-sensitive electronic device. Do not operate or store near strong electrostatic fields. Take proper ESD precautions.

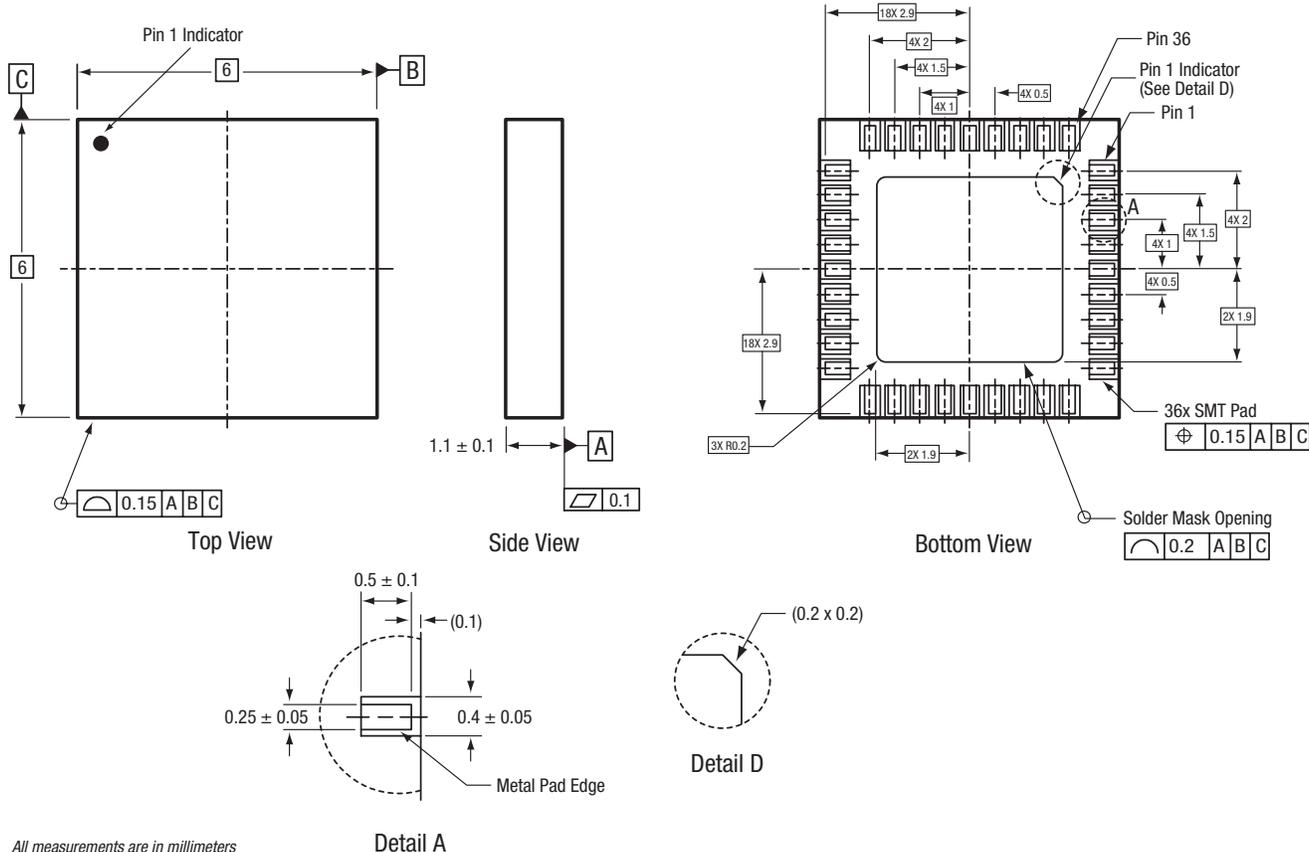

All measurements are in millimeters

Pads are solder mask defined on one edge and metal defined on three edges.

Dimensioning and tolerancing according to ASME Y14.5M-1994

S689_A

Figure 6. SKY73023 36-Pin MCM Package Dimensions

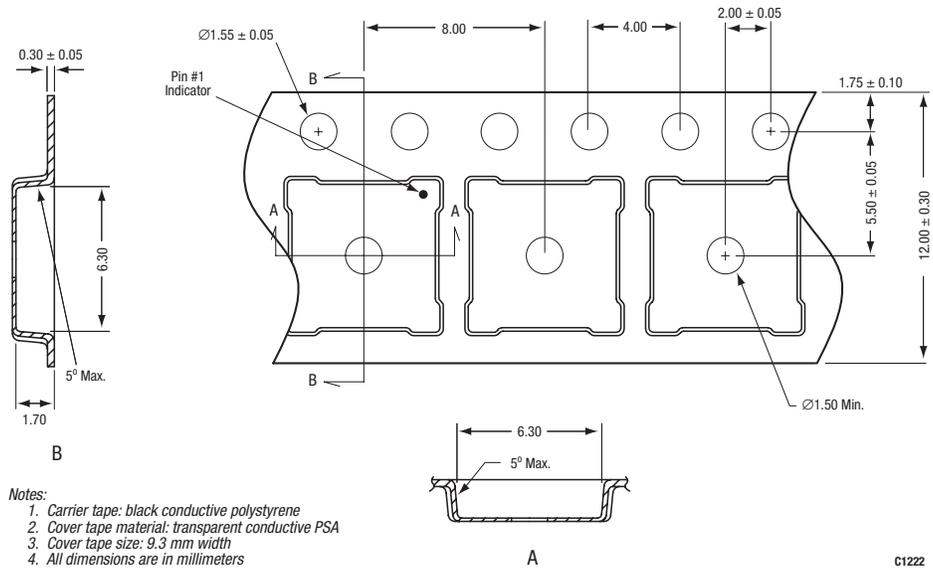


Figure 7. SKY73023 Tape and Reel Dimensions

Ordering Information

| Model Name | Manufacturing Part Number | Evaluation Kit Part Number |
|-------------------------------|-------------------------------|----------------------------|
| SKY73023 Downconversion Mixer | SKY73023-11 (Pb-free package) | |

Copyright © 2007 Skyworks Solutions, Inc. All Rights Reserved.

Information in this document is provided in connection with Skyworks Solutions, Inc. (“Skyworks”) products or services. These materials, including the information contained herein, are provided by Skyworks as a service to its customers and may be used for informational purposes only by the customer. Skyworks assumes no responsibility for errors or omissions in these materials or the information contained herein. Skyworks may change its documentation, products, services, specifications or product descriptions at any time, without notice. Skyworks makes no commitment to update the materials or information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from any future changes.

No license, whether express, implied, by estoppel or otherwise, is granted to any intellectual property rights by this document. Skyworks assumes no liability for any materials, products or information provided hereunder, including the sale, distribution, reproduction or use of Skyworks products, information or materials, except as may be provided in Skyworks Terms and Conditions of Sale.

THE MATERIALS, PRODUCTS AND INFORMATION ARE PROVIDED “AS IS” WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, INCLUDING FITNESS FOR A PARTICULAR PURPOSE OR USE, MERCHANTABILITY, PERFORMANCE, QUALITY OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT; ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. SKYWORKS DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. SKYWORKS SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO ANY SPECIAL, INDIRECT, INCIDENTAL, STATUTORY, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THE MATERIALS OR INFORMATION, WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Skyworks products are not intended for use in medical, lifesaving or life-sustaining applications, or other equipment in which the failure of the Skyworks products could lead to personal injury, death, physical or environmental damage. Skyworks customers using or selling Skyworks products for use in such applications do so at their own risk and agree to fully indemnify Skyworks for any damages resulting from such improper use or sale.

Customers are responsible for their products and applications using Skyworks products, which may deviate from published specifications as a result of design defects, errors, or operation of products outside of published parameters or design specifications. Customers should include design and operating safeguards to minimize these and other risks. Skyworks assumes no liability for applications assistance, customer product design, or damage to any equipment resulting from the use of Skyworks products outside of stated published specifications or parameters.

Skyworks, the Skyworks symbol, and “Breakthrough Simplicity” are trademarks or registered trademarks of Skyworks Solutions, Inc., in the United States and other countries. Third-party brands and names are for identification purposes only, and are the property of their respective owners. Additional information, including relevant terms and conditions, posted at www.skyworksinc.com, are incorporated by reference.