



SOT-23-3L Encapsulate Adjustable Reference Source

CJ431 Adjustable Accurate Reference Source

FEATURES

The output voltage can be adjusted to 36V
Low dynamic output impedance ,its typical value is 0.2
Trapping current capability is 1 to 100mA
The typical value of the equivalent temperature factor in the whole temperature scope is 50 ppm/
The effective temperature compensation in the working range of full temperature
Low output noise voltage
Fast on -state response

SOT-23-3L


1. REFERENCE



2. CATHODE



3. ANODE



ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)


Parameter	SYMBOL	VALUE	UNITS
Cathode Voltage	V _{KA}	37	V
Cathode Current Range(Continuous)	I _{KA}	-100~+150	mA
Reference Input Current Range	I _{ref}	0.05~+10	mA
Power Dissipation	P _D	350	mW
Operating temperature	T _{opr}	0~70	
Storage temperature Range	T _{stg}	-55~+150	

ELECTRICAL CHARACTERISTICS (Tamb=25 unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT	
Reference Input Voltage	V _{ref}	V _{KA} =V _{REF} , I _{KA} =10mA	2.440	2.495	2.550	V	
Deviation of reference input Voltage Over temperature (note)	V _{ref} / T	V _{KA} =V _{REF} , I _{KA} =10mA Tmin Ta Tmax		4.5	17	mV	
Ratio Of Change in Reference Input Voltage to the change in Cathode Voltage	V _{ref} / V _{KA}	I _{KA} =10mA	V _{KA} =10V ~ V _{REF}		-1.0	-2.7	mV/V
			V _{KA} =36V ~ 10V		-0.5	-2.0	
Reference Input Current	I _{ref}	I _{KA} = 10mA, R ₁ =10K R ₂ =		1.5	0.5	μA	
Deviation Of Reference Input Current Over Full Temperature Range	I _{ref} / T	I _{KA} =10mA, R ₁ =10K R ₂ = T _A =full Temperature		0.4	1.2	μA	
Minimum cathode current for Regulation	I _{KA(min)}	V _{KA} =V _{REF}		0.45	1.0	mA	
Off-state cathode Current	I _{KA(OFF)}	V _{KA} =36V , V _{REF} =0		0.05	1.0	μA	
Dynamic Impedance	Z _{KA}	V _{KA} =V _{REF} , I _{KA} =1 to 100mA f = 1.0KHz		0.15	0.5		

Note : T_{MIN}=0 , T_{MAX}=+70

SOT-23-3L PACKAGE OUTLINE DIMENSIONS

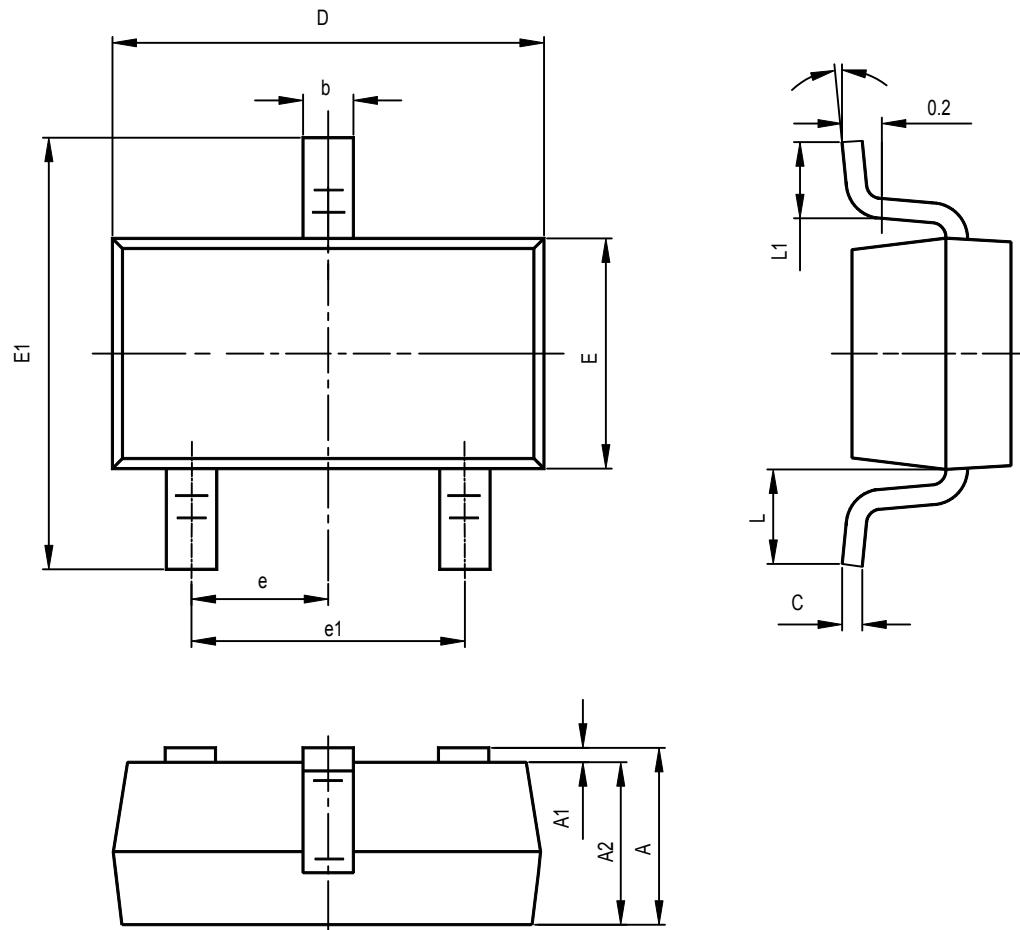

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.400	0.012	0.016
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950TPY		0.037TPY	
e1	1.800	2.000	0.071	0.079
L	0.700REF		0.028REF	
L1	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°