

Technical Data Sheet

TOP View LEDs (Preliminary)

67-21B SUBC/S400-XX/TR8

Features

- P-LCC-2 package.
- White package.
- Optical indicator.
- Colorless clear window.
- Wide viewing angle.
- Suitable for vapor-phase reflow, Infrared reflow and wave solder processes.
- Computable with automatic placement equipment.
- Available on tape and reel (8mm Tape).
- Pb-free.
- The product itself will remain within RoHS compliant version.

Descriptions

• The 67-21 series is available in soft orange, green, blue and yellow. Due to the package design, the optimized light coupling by inter reflector. This feature makes the ideal for light pipe application. The low current requirement makes this device ideal for portable equipment or any other application where power is at a premium.

Applications

- Automotive: backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- Light pipe application.
- General use.

Device Selection Guide

Device Beleetion	Julue		
	Lens Color		
Material	Emitted Color	Lens Color	
InGaN	Super Blue	Water Clear	

Everlight Electronics Co., Ltd.

Device No.:

http://www.everlight.com prepared date::17-May-06


Prepared by: Rita Shen


Page: 1 of 9


Rev. 2


67-21B SUBC/S400-XX/TR8

Package Dimensions










0.8±0.1

For reflow soldering (propose)



Notes: .All dimensions are in millimeters ,Unit = mm

Everlight Electronics Co., Ltd.

http://www.everlight.com

Rev. 2 Page: 2 of 9

Device No.:

prepared date::17-May-06



67-21B SUBC/S400-XX/TR8

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit
Reverse Voltage	V_R	5	V
Forward Current	I_F	25	mA
Operating Temperature	Topr	- 40 ∼ +85	$^{\circ}\! \mathbb{C}$
Storage Temperature	Tstg	- 40∼ +100	$^{\circ}$
Electrostatic Discharge (HBM)	ESD	150	V
Power Dissipation	Pd	110	mW
Peak Forward Current(Duty 1/10 @ 1KHz)	$ m I_{FP}$	100	mA
Soldering Temperature	Tsol	Reflow Soldering : 260 °C for 10 sec. Hand Soldering : 350 °C for 3 sec.	

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Rank	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	Iv	A6	225	358		mcd	I _F =20mA
		X9	650	800		mcd	I _F =20mA
		X0	780	960		mcd	I _F =20mA
Viewing Angle	2 θ 1/2			60		deg	I _F =20mA
Peak Wavelength	λр			468		nm	I _F =20mA
Dominant Wavelength	λd			470		nm	I _F =20mA
Spectrum Radiation Bandwidth	Δλ			35		nm	I _F =20mA
Forward Voltage	VF			3.5	4.3	V	I _F =20mA
Reverse Current	Ir				50	μ A	V _R =5V

Everlight Electronics Co., Ltd.

http://www.everlight.com

Rev. 2


Page: 3 of 9


Device No.:


prepared date::17-May-06


67-21B SUBC/S400-XX/TR8

Typical Electro-Optical Characteristics Curves











Forward Voltage(V2-volts



Forward Current $I_F(mA)$



Everlight Electronics Co., Ltd.

http://www.everlight.com

Rev. 2

Page: 4 of 9

Device No.:

prepared date::17-May-06




67-21B SUBC/S400-XX/TR8

Label explanation


CAT: Luminous Intensity Rank

HUE: Dom. Wavelength Rank

REF: Forward Voltage Rank



Reel Dimensions

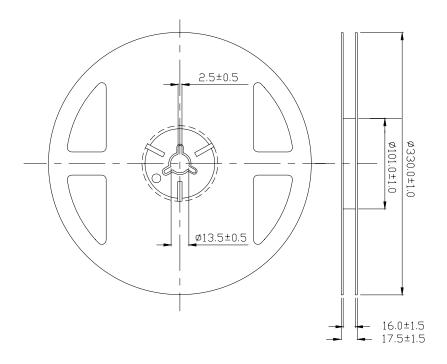

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd.

http://www.everlight.com

Rev. 2 Page: 5 of 9


Device No.:

prepared date::17-May-06




67-21B SUBC/S400-XX/TR8

Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel.

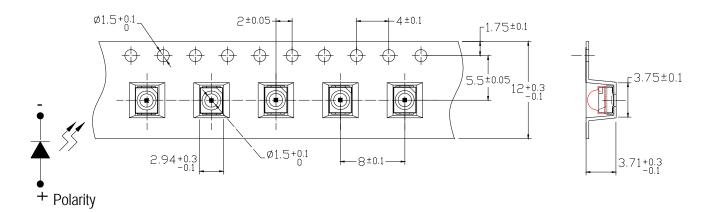

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Moisture Resistant Packaging

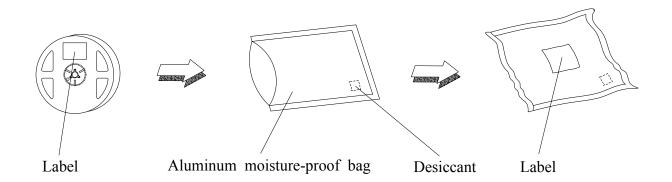

Everlight Electronics Co., Ltd.

Device No.:

prepared date::17-May-06

http://www.everlight.com

Rev. 2

Page: 6 of 9

:17-May-06 Prepared by: Rita Shen



67-21B SUBC/S400-XX/TR8

Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp.: 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min $\int 5 \text{ min}$ $L: -40^{\circ}\mathbb{C}$ 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H:+100°C 5min ∫ 10 sec L:-10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°C	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C / 85%RH	1000 Hrs.	22 PCS.	0/1

Everlight Electronics Co., Ltd.

http://www.everlight.com

Rev. 2 Page: 7 of 9

Device No.:

prepared date::17-May-06



67-21B SUBC/S400-XX/TR8

Precautions For Use


1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

2. Storage

- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package: The LEDs should be kept at 30°C or less and 90%RH or less.
- 2.3 After opening the package: The LED's floor life is 1 year under 30 deg C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

 Baking treatment: 60±5°C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

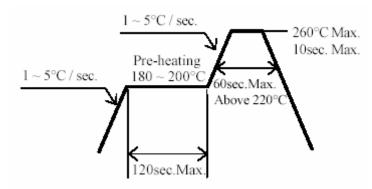

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 8 of 9


Device No.: prepared date::17-May-06 Prepared by: Rita Shen



67-21B SUBC/S400-XX/TR8

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

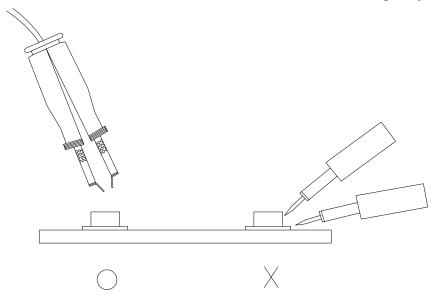

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 9 of 9

Device No.: prepared date::17-May-06 Prepared by: Rita Shen