


POWER SPLITTERS/COMBINERS

50 & 75Ω

2 WAY-180° 10 kHz to 2 GHz

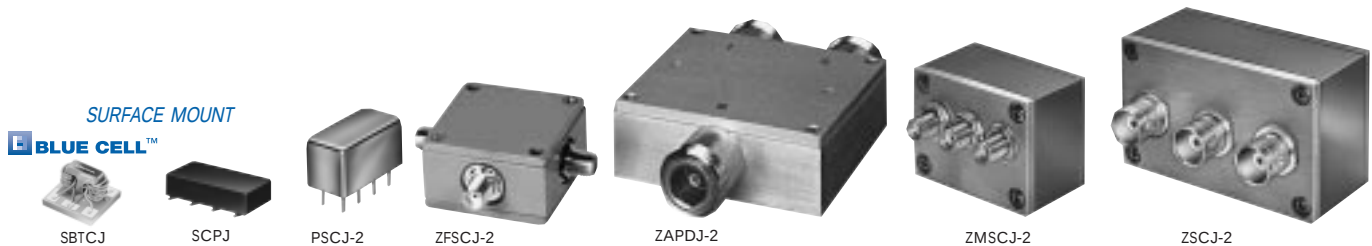

MODEL NO.	FREQ. RANGE MHz f_L - f_U	ISOLATION dB			INSERTION LOSS, dB Above 3dB						PHASE UNBALANCE Degrees			AMPLITUDE UNBALANCE dB			CASE STYLE Note B	CONNECTION LAY- OUT	PCB PL- LAY- OUT	PRICE \$ Qty. (10-49)
		L Typ. Min.	M ^o Typ. Min.	U Typ. Min.	L Typ. Max.	M ^o Typ. Max.	U Typ. Max.	L Typ. Max.	M ^o Typ. Max.	U Typ. Max.	L Max.	M ^o Max.	U Max.	L Max.	M ^o Max.	U Max.				
NEW ♦ SBTCJ-1W	1-750	23	20	24	0.6	1.7	0.9	0.6	1.2	1.8	3	7	10	0.2	0.4	0.9	AT790	nk	117	10.95
SCPJ-2-9	200-900		24	17				1.0	1.8			6			0.7		YY161	az	060	28.95
SCPJ-2-750	30-750	24	18	20				1.5	2.2	1.5	2.2	3	4	6	0.8	0.8	YY161	az	060	27.95
■ SCPJ-2-1W-75	10-500	30	25	22	1.0	1.5	1.5	1.1	1.6	1.5	2.2	3	4	6	0.3	0.5	YY161	az	121	26.95
**■ SCPJ-2-750-75	30-750	26	20	26	1.0	1.5				1.5	2.2	3		6	0.8		YY161	az	121	27.95
PSCJ-2-1	1-200	35	30	30	0.75	1	0.75	0.5	0.8	0.75	1.2	2	2.5	4	0.3	0.15	A01	az		25.95
PSCJ-2-1W	100-600		30	20				1.0	1.9				6		0.5		A06	az		28.95
✦ PSCJ-2-2	0.01-20	35	25	25	0.3	0.8	0.3	0.2	0.5	0.3	0.6	1*	2	2.5	0.1	0.1	A01	az		36.95
■ PSCJ-2-1-75	1-200	35	30	26	0.6	1.2	0.8	1.2	1.2	1.8	2	4	6	0.25	0.2	0.5	A01	az		25.95
ZFSCJ-2-1	1-500	30	20	30	1	1.5	1	1.5	1	1.5	1	2	4	7	0.5	0.2	K18	as		59.95
▲✦ ZFSCJ-2-2	0.01-20	35	25	25	0.3	0.8	0.2	0.5	0.3	0.6	1*	2	2.5	0.1	0.1	0.2	K18	as		57.95
ZFSCJ-2-3	5-300	30	20	30	1	1.5	1	1.5	1	1.5	2	4	6	0.15	0.2	0.5	K18	as		49.95
▲ ZFSCJ-2-4	50-1000	30	20	25	1.2	1.9				1.6	2.4	6		7	0.6		K18	as		69.95
ZMSCJ-2-1	1-200	35	30	30	0.75	1	0.75	0.6	0.8	0.75	1.2	2	2.5	4	0.3	0.15	M21	at		57.95
✦ ZMSCJ-2-2	0.01-20	35	25	25	0.3	0.8	0.2	0.5	0.3	0.6	1*	2	2.5	0.1	0.1	0.2	M21	at		67.95
ZSCJ-2-1	1-200	35	30	30	0.75	1	0.75	0.6	0.8	0.75	1.2	2	2.5	4	0.3	0.15	M22	at		51.95
✦ ZSCJ-2-2	0.01-20	35	25	25	0.3	0.8	0.2	0.5	0.3	0.6	1*	2	2.5	0.1	0.1	0.2	M22	at		59.95
ZAPDJ-2	1000-2000	22	18	22	1.3	1.8	1.3	1.8	1.3	1.8	6	6	6	0.8	0.8	0.8	F53	as		71.95

L = low range [f_L to 10 f_L]

M = mid range [10 f_L to $f_U/2$]

U = upper range [$f_U/2$ to f_U]

NOTES:

- ♦ Aqueous washable
- Non-hermetic
- * Phase unbalance is 3 degrees max from f_L to 3 f_L .
- ** For SCPJ-2-750-75: L=30-375 MHz, U=375-750 MHz
- ✦ When only specification for M range given, specifications applied to entire frequency range.
- Denotes 75 Ohm model, for coax connector models
75 Ohm BNC connectors are standard.
- ▲ Available only with SMA connectors.
- ✦ At low range frequency band (f_L to 10 f_L), linearly derate maximum input power by 13 dB.
- A. General Quality Control Procedures, Environmental Specifications, Hi-Rel and MIL description are given in section 0, see "Mini-Circuits Guarantees Quality" article.
- B. Connector types and case mounted options, case finishes are given in section 0, see "Case styles & Outline Drawings".
- C. Prices and specifications subject to change without notice.
- 1. Absolute maximum power, voltage and current ratings:
 - 1a. Matched power rating 1 Watt
except models PSCJ-2-1W, SCPJ-2-1W-75,
SCPJ-2-750, SCPJ-2-750-75, AMT-2, SBTCJ-1W 0.5 Watt
 - 1b. Internal load dissipation 0.125 Watt



Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

ISO 9001 CERTIFIED

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

030211


Surface Mount [□], Plug-In & Coaxial

2 WAY-0°/180° 5 to 200 MHz

SURFACE MOUNT



AMT




PMT

MODEL NO.	FREQ. RANGE MHz f _t -f _u	ISOLATION dB			INSERTION LOSS, dB Above 3dB			PHASE UNBALANCE Degrees			AMPLITUDE UNBALANCE dB			CASE STYLE Note B	CONNECTION	PRICE \$ Qty. (10)
		L	M°	U	L	M°	U	L	M°	U	L	M°	U			
		Typ. Min.	Typ. Min.	Typ. Min.	Typ. Max.	Typ. Max.	Typ. Max.	Max.	Max.	Max.	Max.	Max.	Max.			
◆ AMT-2	50-200	35 20			0.8 1.2			2			0.3			CD636	ls	12.95
PMT-1	5-200	22 20	24 20	24 18	0.8 1.0	0.9 1.1	1.0 1.5	2 4	8	0.1 0.2	0.5	A04	ba	21.95		

L = low range [f_L to $10 f_L$]

M = mid range [$10 f_L$ to $f_U/2$]

U = upper range [$f_U/2$ to f_U]



- S-J ports, isolation 40 dB typical
- Inphase ports, S-1 and S-2, insertion loss 0.2 dB typical
- Amplitude unbalance defined by input S or J ports to output 1 and 2

pin and coaxial connections

see case style outline drawing

PORT	as	at	az	ba	ls	nk
SUM PORT	S	2	1	1	3	6
PORT 1	1	1	5	2	6	1
PORT 2	2	3	6	3	4	3
PORT J	—	—	—	4	1	—
GND EXT.	—	—	2,3,4,7,8	5,6,7,8	2,5	2,4
CASE GND	—	—	2,3,4,7,8	5,6,7,8	—	—
NOT USED	—	—	—	—	—	5
DEMO BOARD	—	—	TB-228	—	—	TB-227

NSN GUIDE

MCL NO.

PSCJ-2-1
PSCJ-2-2
ZSCJ-2-2

NSN

6625-01-413-2386
5985-01-332-3084
5895-01-340-7761



The Design Engineers Search Engine

Provides Actual Data Instantly
At: <http://www.minicircuits.com>

In Stock... Immediate Delivery

For Custom Versions Of Standard Models
Consult Our Applications Dept.

