


Technical Data Sheet (Prelminary)

White SMD Surface Mount Device

67-23B UWC/TR8

Features

- Fluorescence Type
- High Luminous Intensity
- High Efficiency
- Emission Color:x=0.29,y=0.30
- Pb-free



The white LED which was fabricated using a blue LED and a phosphor, and the phosphor is excited by blue light and emits yellow fluorescence. The mixture of blue light and yellow light results in a white emission.

Applications

- OA Equipment
- Backlighting of Full Color LCD
- Automotive Equipment
- Replacement of Conventional Light **Bulbs and Fluorescent Lamps**


Device Selection Guide


| | Chip | | |
|----------|----------------------|-------------|--|
| Material | Emitted Color | Lens Color | |
| InGaN | White | Water Clear | |




Rev. 1.0


Package Outline Dimensions






Polarity

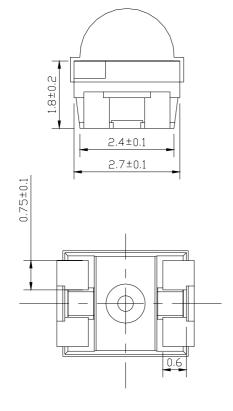





Notes:

- 1. All dimensions are in millimeters
- 2. tolerance Unless DImension=±0.05mm

Absolute Maximum Ratings (Ta=25°C)

| Parameter | Symbol | Rating | Unit |
|---|-------------|--------------------|-------------------------|
| Reverse Voltage | VR | 5 | V |
| Operating Temperature | Topr | -40 ~ +85 | $^{\circ}\!\mathbb{C}$ |
| Storage Temperature | Tstg | -40~ +100 | $^{\circ}\! \mathbb{C}$ |
| Soldering Temperature | Tsol | 260 (for 5 second) | $^{\circ}\! \mathbb{C}$ |
| Electrostatic Discharge | ESD | 150 | V |
| Power Dissipation | Pd | 110 | mW |
| *Forward Current | I F | 25 | mA |
| *Peak Forward Current(Duty 1/10 @ 1KHz) | $ m I_{FP}$ | 100 | mA |

^{*.} Maximum forward current for each die.

Electro-Optical Characteristics (Ta=25°C)

| Parameter | Symbol | Min. | Typ. | Max. | Units | Condition |
|--------------------|--------------|------|------|------|---------|----------------------|
| Luminous Intensity | I_{V} | 1600 | 1950 | | mcd | I _F =60mA |
| Forward Voltage | V_{F} | | 3.5 | 4.0 | V | I _F =20mA |
| Reverse Current*1 | I_R | | | 50 | μ A | $V_R=5V$ |
| Viewing Angle | 2 \theta 1/2 | | 60 | | deg | I _F =60mA |

^{*1} For each die.

The products are sensitive to static electricity and care must be fully taken when handling products.

Rev. 1.0

Color Ranks

| | Rank A0 | | | | | |
|---|---------|-------|-------|-------|--|--|
| X | 0.280 | 0.264 | 0.283 | 0.296 | | |
| У | 0.248 | 0.267 | 0.305 | 0.276 | | |

| | | В3 | | | | | |
|---|------|------|-------|-------|-------|--|--|
| X | 0.28 | 37 | 0.283 | 0.304 | 0.307 | | |
| у | 0.29 | 95 (| 0.305 | 0.33 | 0.315 | | |


| | B4 | | | | | |
|---|-------|-------|-------|-------|--|--|
| X | 0.307 | 0.304 | 0.330 | 0.330 | | |
| y | 0.315 | 0.330 | 0.360 | 0.339 | | |

| | B5 | | | | |
|---|-------|-------|-------|-------|--|
| X | 0.296 | 0.287 | 0.307 | 0.311 | |
| у | 0.276 | 0.295 | 0.315 | 0.294 | |

| | В6 | | | | | |
|---|-------|-------|-------|-------|--|--|
| X | 0.311 | 0.307 | 0.330 | 0.330 | | |
| У | 0.294 | 0.315 | 0.339 | 0.318 | | |

| | Rank C0 | | | | | |
|---|---------|-------|-------|-------|--|--|
| X | 0.330 | 0.330 | 0.361 | 0.356 | | |
| y | 0.318 | 0.360 | 0.385 | 0.351 | | |

CIE Chromaticity Diagram

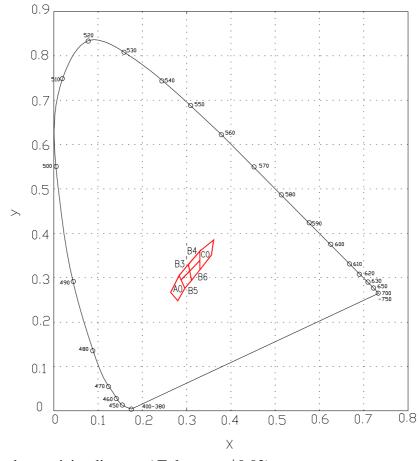

*The C.I.E. 1931 chromaticity diagram (Tolerance ± 0.02).

Everlight Electronics Co., Ltd.

Device No.:


http://www.everlight.com


Rev. 1.0


Page: 4 of 10


Prepared date:20-Jan-05 Prepared by: Forrest Chen


Typical Electro-Optical Characteristics Curves














Device No.:

http://www.everlight.com

Label explanation


CAT: Luminous Intensity Rank

HUE: Chromaticity Coordinates Rank

REF: Forward Voltage Rank




Reel Dimensions

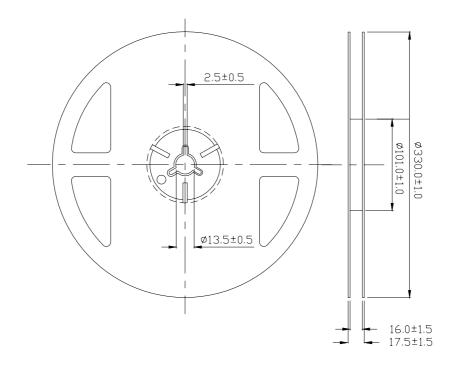


Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel.

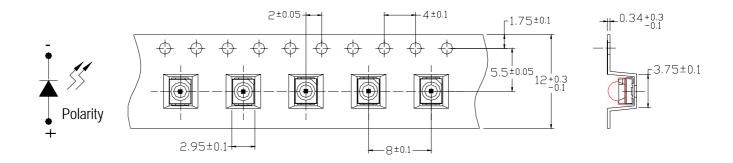

Note: Tolerances Unless Dimension ± 0.1 mm, Unit = mm

Moisture Resistant Packaging

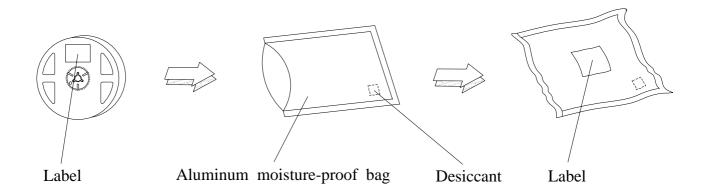

 $Everlight\ Electronics\ Co.,\ Ltd.$

Device No.:

http://www.everlight.com Prepared date:20-Jan-05 Rev. 1.0

Page: 7 of 10

Prepared by: Forrest Chen



Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

| No. | Items | Test Condition | Test Hours/Cycles | Sample Size | Ac/Re |
|-----|-------------------------------------|---|----------------------|----------------|-------|
| 1 | Reflow Soldering | Temp. : 260°C±5°C Min. 5 sec. | 6 Min. | 22 Pcs. | 0/1 |
| 2 | Temperature Cycle | $H: +100^{\circ}\mathbb{C}$ 15min \int 5 min $L: -40^{\circ}\mathbb{C}$ 15min | 300 Cycles | 22 PCS. | 0/1 |
| 3 | Thermal Shock | H:+100°C 5min ∫ 10 sec L:-10°C 5min | 300 Cycles | 22 PCS. | 0/1 |
| 4 | High Temperature Storage | Temp. : 100°C | 1000 Hrs. | 22 PCS. | 0/1 |
| 5 | Low Temperature Storage | Temp. : -40°€ | 1000 Hrs. | 22 PCS. | 0/1 |
| 6 | DC Operating Life | $I_F = 20 \text{ mA} / 25^{\circ}\text{C}$ | 1000 Hrs. | 22 PCS. | 0/1 |
| 7 | High Temperature / High Humidity | 85°C/85%RH | 1000 Hrs. | 22 PCS. | 0/1 |

Precautions For Use


1. Over-current-proof

Customer must apply resistors for protection , otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
 - 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package, the LEDs should be kept at 30°C or less and 90%RH or less.
- 2.3 The LEDs should be used within a year.
- 2.4 After opening the package, the LEDs should be kept at 30° C or less and 70%RH or less.
- 2.5 The LEDs should be used within 168 hours (7 days) after opening the package.
- 2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment : 60±5°C for 24 hours.

- 3. Soldering Condition
 - 3.1 Pb-free solder temperature profile

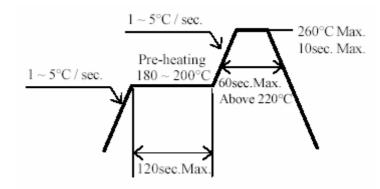

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.
- 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 280°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1.0

Device No.: Prepared date:20-Jan-05 Prepared


Prepared by: Forrest Chen

Page: 9 of 10



5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

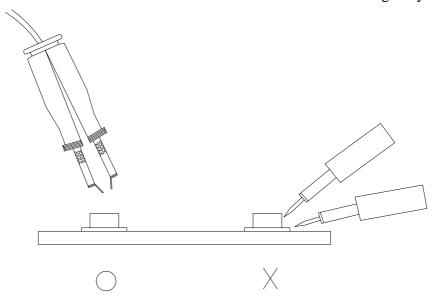

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1.0 Page: 10 of 10

Device No.: Prepared date:20-Jan-05 Prepared by: Forrest Chen