


Thermopile Detector **TPS 333**

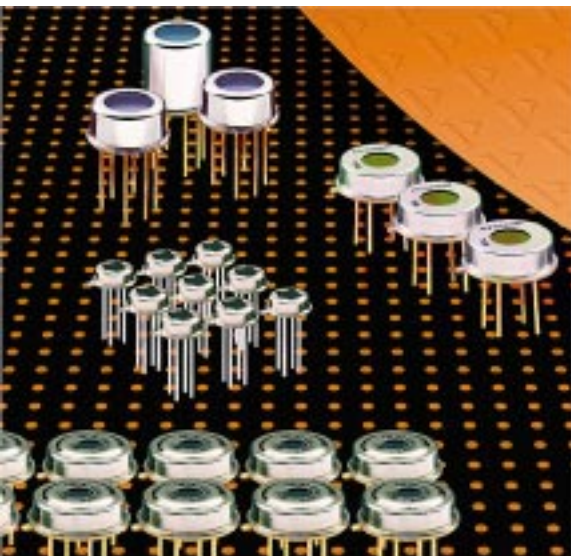

Miniature sensor housing: TO 18




Thermistor temperature reference included

Large signal; low temperature coefficient of sensitivity


Ideally suited for ear thermometers, miniature pyrometers

The **TPS 333** is an extremely small thermopile detector employing a chip of $0.7 \times 0.7 \text{ mm}^2$ absorber size and a $100 \text{ k}\Omega$ thermistor as temperature reference.

The square window opening is equipped with a $5.5 \mu\text{m}$ longpass (standard) infrared filter. The detector shows a constant sensitivity characteristics over the wavelength.

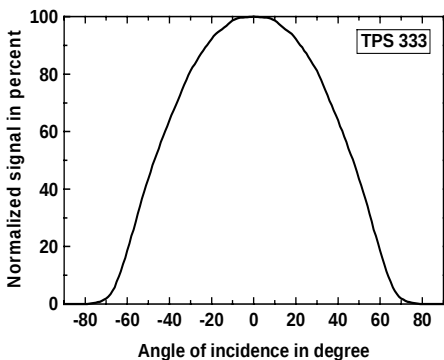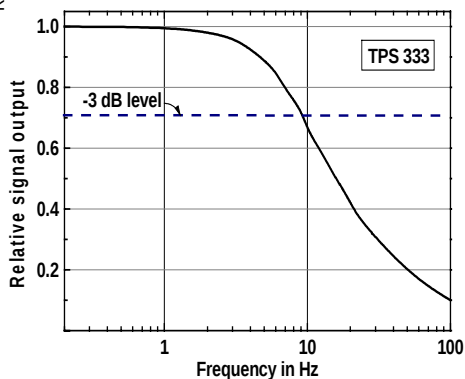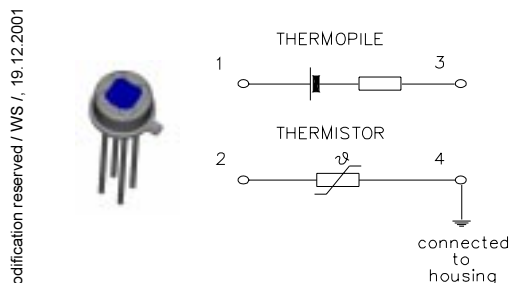

Parameters	TPS 333		
	typical	units	condition
Sensitive area	0.7 x 0.7	mm ²	absorbing area
Window size	2.4 x 2.4	mm ²	
DC sensitivity	35	V/W	500K BB 5...14μm
Resistance	75	kΩ	
Noise	38	nV/√Hz	r.m.s. 300K,
NEP	1.2	nW/√Hz	500K BB 5...14μm
D*	0.6 x 10 ⁸	cm/√Hz/W	500K BB 5...14μm
TC of sensitivity	0.02	%/K	
TC of resistance	0.02	%/K	
Time constant	25	ms	
Storage temperature	-40	100	°C non permanent
Operating temperature	-40	100	°C non permanent
Thermistor resistance	100	kΩ	25°C
beta	3964	K	25°C/100°C
Field of view	100	°	at 50% points

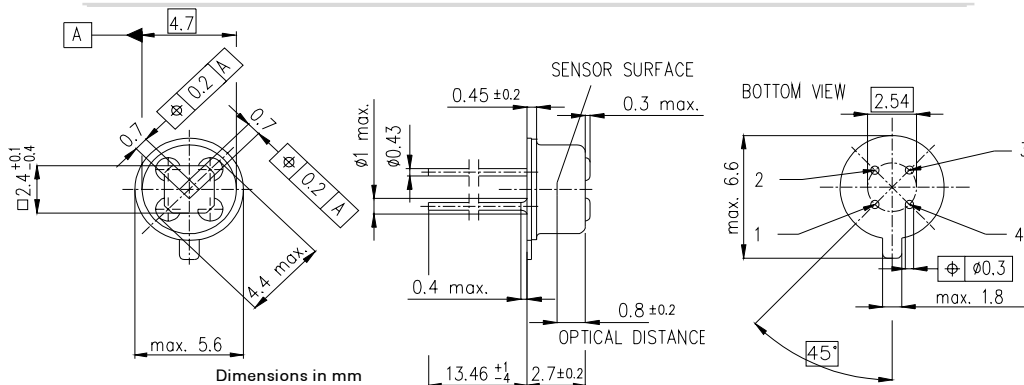

Europe:
PerkinElmer Optoelectronics GmbH
 Wenzel Jaksch Str 31
 Wiesbaden / Germany
 Phone +49(0)611 492 0
 Fax +49(0)611 492 170

USA:
PerkinElmer Optoelectronics
 2175 Mission College Blvd
 Santa Clara, CA 95054
 Phone +408 565 0830
 Fax +408 565 0703

Asia:
PerkinElmer Optoelectronics
 47, Ayer Rajah Crescent #06-12
 Singapore 139947
 Phone +65 775 2022
 Fax +65 775 1008