

# **Technical Data Sheet Mini TOP View LEDs**

#### 65-21UTC/S400-XX/TR8

#### **Features**

- White SMT package.
- Optical indicator.
- Wide viewing angle.
- Soldering methods: reflow soldering
- Available on tape and reel
- Pb-free
- The product itself will remain within RoHS compliant version.



• The 65-21 series is available in soft orange, green, blue, and yellow. Due to the package design, the LED has wide viewing angle and optimized light coupling by inter reflector. This feature makes the ideal for light pipe application.



- Optical indicators.
- Coupling into light guides.
- Backlighting (LCD, cellular phones, switches, keys, displays, illuminated advertising, general lighting).
- Coupling into light guides; Interior automotive lighting (e.g. dashboard backlighting, etc.).




#### **Device Selection Guide**

Chip		Lens Color
Material	Material Emitted Color	
InGaN	Pure White	Water Clear

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 1 of 10

## **Package Outline Dimensions**

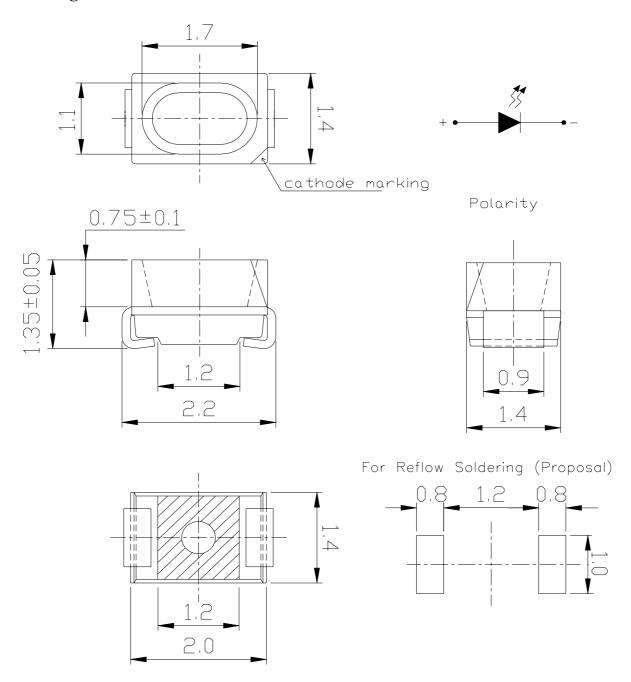

**Notes:** All dimensions are in millimeters.

Tolerances unspecified are ±0.1mm.

Everlight Electronics Co., Ltd.

Device No.: DSE-651-002

http://www.everlight.com

Prepared date: 30-Dec-2005

Rev. 2 Page: 2 of 10

Prepared by: Rita Shen



# EVERLIGHT ELECTRONICS CO.,LTD.

## 65-21UTC/S400-XX/TR8

#### **Absolute Maximum Ratings (Ta=25°C)**

Parameter	Symbol	Rating	Unit
Reverse Voltage	VR	5	V
Forward Current	IF	25	mA
Operating Temperature	Topr	-40 ~ +85	$^{\circ}\! \mathbb{C}$
Storage Temperature	Tstg	-40 ~ +100	$^{\circ}\!\mathbb{C}$
Electrostatic Discharge(HBM)	ESD	150	V
Power Dissipation	Pd	110	mW
Peak Forward Current (Duty 1/10 @1KHz)	IFP	100	mA
Soldering Temperature	Tsol	Reflow Soldering : Hand Soldering :	260 °C for 10 sec 350 °C for 3 sec.

The products are sensitive to static electricity and care must be fully taken when handling products **Electro-Optical Characteristics (Ta=25** $^{\circ}$ C)

Parameter	Symbol	*Chip Rank	Min.	Тур.	Max.	Unit	Condition
		A4	106	120		mcd	IF=20mA
		A5	133	150			
Iiu Iit	$ m I_{V}$	A6	160	250			
Luminous Intensity		X7	380	420			
		X8	460	515			
		X9	552	617			
Viewing Angle	$2 heta_{1/2}$			120		deg	I <sub>F</sub> =20mA
Forward Voltage	$V_{\mathrm{F}}$		2.7	3.3	3.7	V	I <sub>F</sub> =20mA
Reverse Current	$I_R$				50	$\mu$ A	V <sub>R</sub> =5V

## 65-21UTC/S400-<u>XX</u>/TR8



Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 3 of 10



# EVERLIGHT ELECTRONICS CO.,LTD.

# 65-21UTC/S400-XX/TR8

#### **Color Ranks**

	A0				
X	0.280	0.264	0.283	0.296	
У	0.248	0.267	0.305	0.276	

	В3				
X	0.287	0.283	0.304	0.307	
у	0.295	0.305	0.33	0.315	


	B4					
X	0.307	0.304	0.330	0.330		
у	0.315	0.330	0.360	0.339		

	B5					
X	0.296	0.287	0.307	0.311		
У	0.276	0.295	0.315	0.294		

		В6					
X	0.311	0.307	0.330	0.330			
У	0.294	0.315	0.339	0.318			

	C0					
X	0.330	0.330	0.361	0.356		
У	0.318	0.360	0.385	0.351		


## **CIE Chromaticity Diagram**

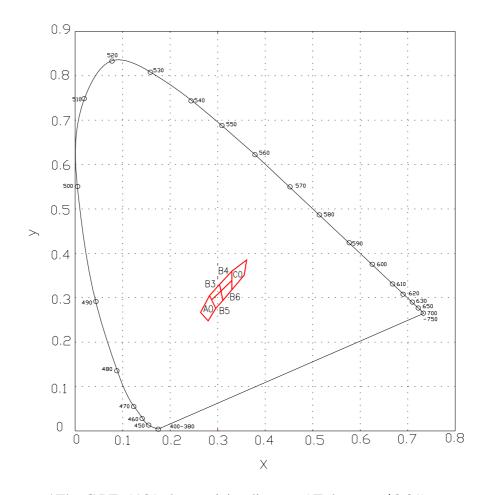



\*The C.I.E. 1931 chromaticity diagram (Tolerance ±0.01).


Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 4 of 10 Device No.: DSE-651-002 Prepared date: 30-Dec-2005 Prepared by: Rita Shen


#### **Typical Electro-Optical Characteristics Curves**















#### Label explanation


**CAT: Luminous Intensity Rank** 

**HUE: Chromaticity Coordinates** 

**REF: Forward Voltage Rank** 



#### **Reel Dimensions**

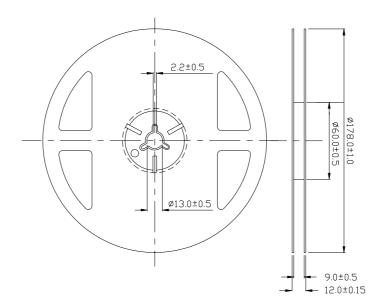


**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm. Unit = mm

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 6 of 10




#### Carrier Tape Dimensions: Loaded quantity 3000 PCS per reels

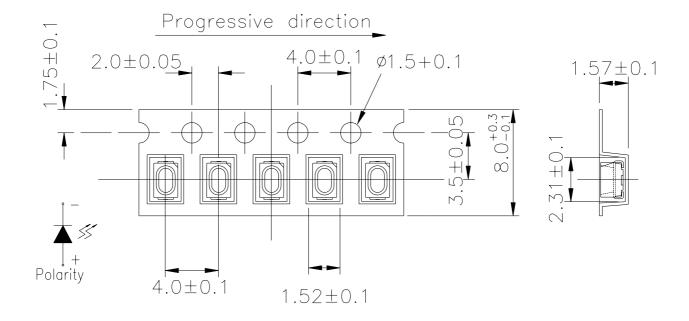

Note: The tolerances unless mentioned is  $\pm 0.1$ mm Unit = mm

#### **Moisture Resistant Packaging**

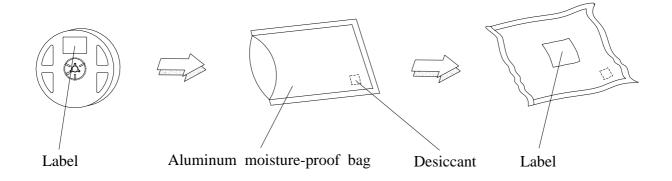

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 7 of 10



#### **Reliability Test Items And Conditions**

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min $\int$ 5 min $L: -40^{\circ}\mathbb{C}$ 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	$H: +100^{\circ}\mathbb{C}$ 5min $\int 10 \sec$ $L: -10^{\circ}\mathbb{C}$ 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°C	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C / 85%RH	1000 Hrs.	22 PCS.	0/1

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 8 of 10



#### **Precautions For Use**


1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
  - 2.1 Do not open moisture proof bag before the products are ready to use.
  - 2.2 Before opening the package: The LEDs should be kept at  $30^{\circ}$ C or less and 90%RH or less.
  - 2.3 After opening the package: The LED's floor life is 1 year under 30 deg C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
  - 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment :  $60\pm5^{\circ}$ C for 24 hours.

- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

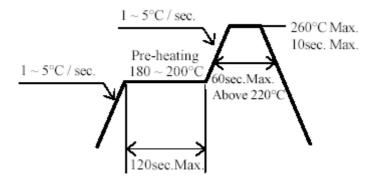

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

#### 4. Soldering Iron


Each terminal is to go to the tip of soldering iron temperature less than  $350^{\circ}$ C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 9 of 10 Device No.: DSE-651-002 Prepared date: 30-Dec-2005 Prepared by: Rita Shen



#### 5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

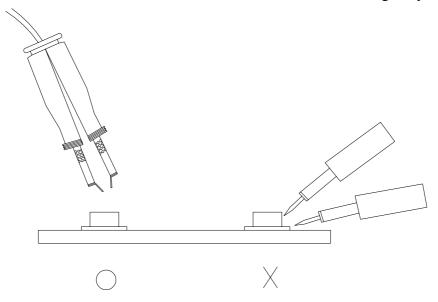

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 10 of 10