

TENTATIVE TOSHIBA BIPOLAR LINEAR INTEGRATED CIRCUIT SILICON MONOLITHIC

TA1274F

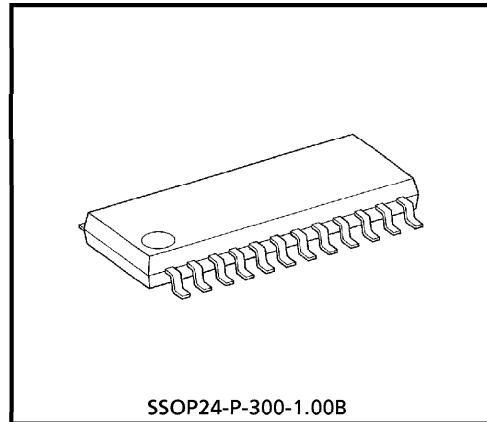
PIF / SIF SYNCHRONOUS DEMODULATOR IC

FEATURES

- Compatible pin assignment to TA1267AF

PIF CIRCUIT

- True synchronous PIF demodulator
- 3-stages gain controlled PIF amplifier
- High speed response PIF AGC detector
- Buzz reducer
- Equalizer for video output
- AFT detector without extra reference circuit



Weight : 0.27 g (Typ.)

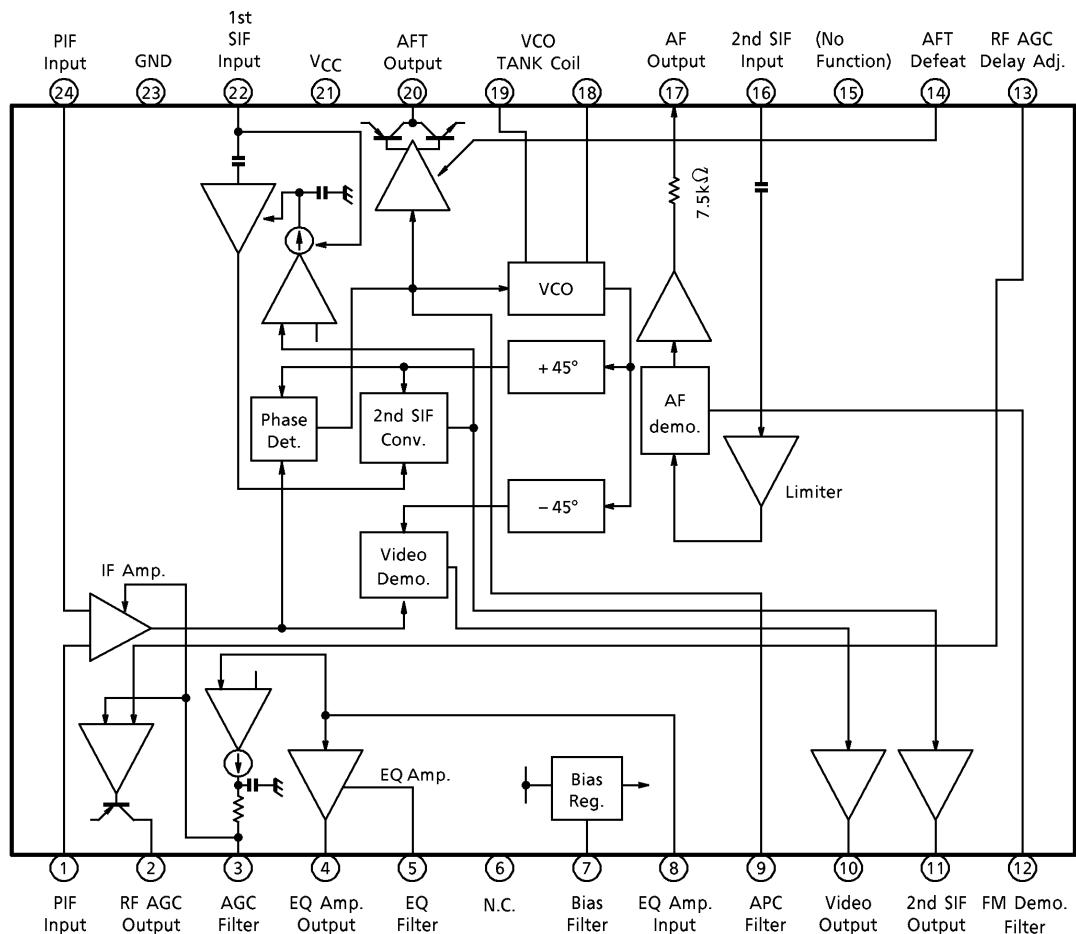
SIF CIRCUIT

- Wide range gain controlled SIF amplifier (control range : 70 dB Typ.)
- Alignment-free PLL-FM demodulator






980910EBA1






- TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

BLOCK DIAGRAM





TERMINAL FUNCTION

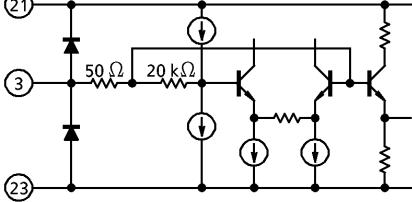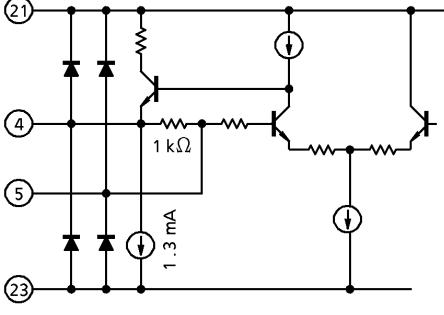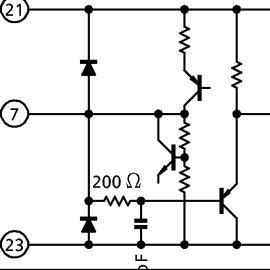PIN No.	NAME	FUNCTION	INTERFACE CIRCUIT
1 24	PIF input	Differential type inputs Typical input level is 85 dB μ V.	
2	RF AGC output	Open collector (PNP) type output. Maximum output current is 0.5 mA.	
3	AGC filter	Connect a capacitor (0.47 μF) between GND.	
4 5	EQ amplifier output EQ filter	No.4 terminal is EQ amplifier output. Maximum output current of this terminal is 5 mA. No.5 terminal is for EQ filter.	
6	N.C.		—
7	Bias filter	Connect a capacitor (10 μF) between GND.	

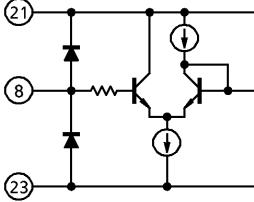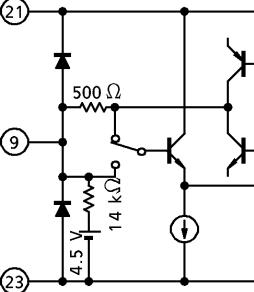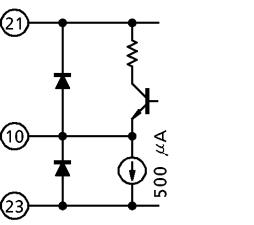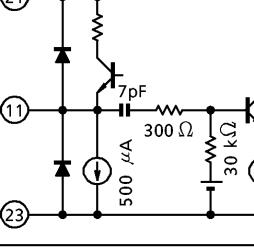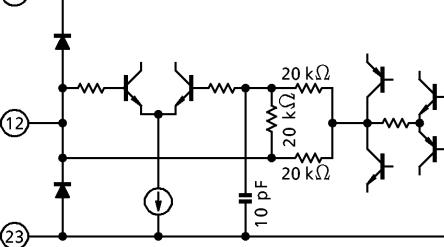PIN No.	NAME	FUNCTION	INTERFACE CIRCUIT
8	EQ amplifier input	EQ amplifier inputs.	
9	APC filter	Connect a resistor (330 Ω) and a capacitor (0.47 μF) between GND in series. And connect a capacitor (1000 pF) between this terminal and GND. Sensitivity of phase detector is 400 μA/rad (Typ.), and sensitivity of VCO is 1.8 MHz/V (Typ.).	
10	Video output	Connect a resistor (1 kΩ) between GND. Maximum output current is 10 mA.	
11	2nd SIF output	2nd SIF signal is outputted from this terminal.	
12	FM demodulating filter	Connect a capacitor (2.2 μF) between GND.	

PIN No.	NAME	FUNCTION	INTERFACE CIRCUIT
13	RF AGC delay adj.	This terminal is for RF AGC delay point adjustment. 100 μ A current is outputted from this terminal. Connect a resister (5.6 k Ω) and a volume (10 k Ω) between GND in series.	
14	AFT Defeat SW	This terminal is AFT defeat switch. To open this terminal, AFT function is activate. To connect GND this terminal, AFT function is not activate. And terminal No.20 goes to 1/2 V _{CC} .	
15	(No function)	This terminal must be connected to V _{CC} .	—
16	2nd SIF input	This terminal 2nd SIF input. This terminal must be decoupled outer circuit on D.C.	
17	AF output	Output resistance of this terminal is 7.5 k Ω .	
18 19	VCO tank	Connect tank for VCO between these terminals. Capacitance of the VCO tank is 27 pF.	

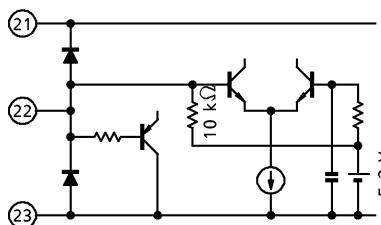PIN No.	NAME	FUNCTION	INTERFACE CIRCUIT
20	AFT output	Push-pull type current output. Reverse type AFT.	
21	VCC	Recommended voltage range is 9.0 V ± 10%.	—
22	SIF input	In use inter-carrier application, connect this terminal to GND. In this condition, the SIF amplifier sets gain minimum.	
23	GND	—	—

MAXIMUM RATINGS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Supply Voltage	V _{CC}	13	V
Power Dissipation	P _D max	1040 (Note 1)	mW
Operating Temperature	T _{opr}	-20~75	°C
Storage Temperature	T _{stg}	-55~150	°C

(Note 1) : This value is on condition that the IC is mounted on PCB (50 mm × 50 mm). When using the device at Ta = 25°C, decrease the power dissipation by 8.3 mW for each increase of 1°C.

RECOMMENDED SUPPLY VOLTAGE

PIN No.	PIN NAME	MIN.	TYP.	MAX.	UNIT
21	V _{CC}	8.1	9.0	9.9	V

ELECTRICAL CHARACTERISTICS

DC current characteristics (V_{CC} = 9.0 V, Ta = 25°C)

PIN No.	PIN NAME	SYMBOL	MIN.	TYP.	MAX.	UNIT
21	V _{CC}	I _{CC}	36	45	60	mA

DC voltage characteristics (V_{CC} = 9.0 V, Ta = 25°C)

PIN No.	SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
1	V ₁	—	—	3.5	4.0	4.5	V
4	V ₄	—	No signal input	4.7	5.2	5.7	
5	V ₅	—	—	4.7	5.2	5.7	
7	V ₇	—	—	6.3	7.0	7.7	
10	V ₁₀	—	No signal input	4.7	5.2	5.7	
11	V ₁₁	—	—	3.1	3.5	3.9	
14	V ₁₄	—	—	2.5	3.1	3.7	
15	V ₁₅	—	—	2.5	3.1	3.7	
16	V ₁₆	—	—	2.5	3.1	3.7	
17	V ₁₇	—	2nd SIF 4.5 MHz	3.2	3.7	4.2	
18	V ₁₈	—	—	7.2	7.6	7.9	
19	V ₁₉	—	—	7.2	7.6	7.9	
20	V ₂₀	—	In AFT defeat	4.3	4.5	4.7	
22	V ₂₂	—	—	4.9	5.3	5.7	
24	V ₂₄	—	—	3.5	4.0	4.5	

AC CHARACTERISTICS ($V_{CC} = 9.0$ V, $T_a = 25^\circ\text{C}$)
PIF section

CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
PIF Input Sensitivity	v_{in} min (p)	—	(Note 1)	—	40	45	$\text{dB}\mu\text{V}$
PIF Maximum Input Signal	v_{in} max (p)	—		105	113	—	
PIF Gain Control Range	R_{AGC} (p)	—		68	73	—	
RF AGC Maximum Output Voltage	V_{AGC} max	—	(Note 2)	8.5	8.9	—	V
RF AGC Minimum Output Voltage	V_{AGC} min	—		—	0.0	0.1	V
PIF Input Resistance (*)	Z_{in} R (p)	—	(Note 3)	—	1.2	—	$\text{k}\Omega$
PIF Input Capacitance (*)	Z_{in} C (p)	—		—	3.6	—	pF
Differential Gain	DG	—	(Note 4)	—	1.0	3.0	%
Differential Phase	DP	—		—	3.0	5.0	deg
Intermodulation	I_M	—	(Note 5)	50	55	—	dB
Video Output Signal Amplitude	v_{Det} (p)	—	(Note 6)	2.0	2.2	2.4	V
Video Output S/N	S/N (p)	—	(Note 7)	55	60	—	dB
Synchronous Signal Level	V_{sync}	—	(Note 8)	2.4	2.7	3.0	V
Threshold Level of the Black Noise Inverter	V_{thB}	—	(Note 9)	1.7	2.0	2.3	
Clamp Level of the Black Noise Inverter	V_{cpB}	—		3.3	3.6	3.9	
Video Bandwidth (-3 dB)	f_{Det} (p)	—	(Note 10)	6	8	10	MHz
Capture Range of the PLL (Upper)	f_p (p) H	—	(Note 11)	1.8	2.3	—	MHz
Capture Range of the PLL (Lower)	f_p (p) L	—		—	-2.0	-1.5	
Hold Range of the PLL (Upper)	f_h (p) H	—		1.8	2.3	—	
Hold Range of the PLL (Lower)	f_h (p) L	—		—	-2.0	-1.5	
Control Steepness of the VCO	β	—	(Note 12)	—	1.8	—	MHz/V
Steepness of the AFT Detection	S_{AFT}	—	(Note 13)	15	20	25	kHz/V
AFT Maximum Output Voltage	V_{AFT} max	—		8.5	8.8	—	V
AFT Minimum Output Voltage	V_{AFT} min	—		—	0.4	0.6	
AFT Output Voltage On Defeating	V_{AFT} Def	—	(Note 14)	4.3	4.5	4.7	

(*) : Not tested


SIF section

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
SIF Maximum Input Signal	v_{in} max (s)	—	(Note 15)	105	118	—	$\text{dB}\mu\text{V}$
SIF Gain Control Range	R_{AGC} (s)	—		55	75	—	dB
SIF Input Resistance (*)	Z_{in} R (s)	—	(Note 16)	—	10	—	$\text{k}\Omega$
SIF Input Capacitance (*)	Z_{in} C (s)	—		—	2.8	—	pF
Limiting Sensitivity	v_{in} lim	—	(Note 17)	—	40	45	$\text{dB}\mu\text{V}$
AM Reduction Ratio	AMR	—	(Note 18)	55	68	—	dB
AF Output Signal Amplitude	V_{Det} (s)	—	(Note 19)	350	500	710	mV_{rms}
AF Output S/N	S / N (s)	—		55	63	—	dB
Total Harmonics Distortion	THD	—		—	0.2	1.0	%
Hold Range of the FM Demodulator (Lower)	f_h (s) L	—	(Note 20)	—	—	3.9	MHz
Hold Range of the FM Demodulator (Upper)	f_h (s) H	—		5.3	—	—	
Capture Range of the FM Demodulator (Upper)	f_p (s) H	—	(Note 21)	—	—	4.0	MHz
Capture Range of the FM Demodulator (Lower)	f_p (s) L	—		5.2	—	—	
Ripple Rejection	RR	—	(Note 22)	—	—	-22	dB

(*) : Not tested

NOTE	INPUT POINT	MEAS. POINT	SW3	SW8	VR13	SW14	b	TEST CONDITION				
								TP4	ON	OFF	ON	
Note 4	J1	TP4	OFF	ON	—				ON	ON	ON	ON
Note 5	J1	TP4	OFF	ON	—			OFF				

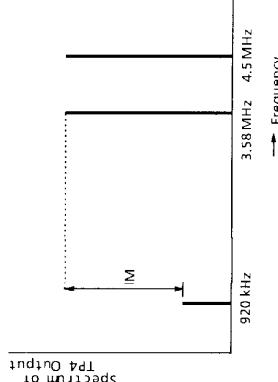• Input the signal (Frequency : 45.75 MHz, Amplitude : 85 dB μ V, amplitude modulated by 10 step signal) to J1.
 • Measure DG and DP at TP4.
 • Input the signal (Frequency : 45.75 MHz, Amplitude : 85 dB μ V, 15 kHz sine wave / 30% AM) from J1.
 • Measure the minimum voltage of the output signal at TP4 (Vmin).
 • Input the mixture of 3 signals (signal 1 Frequency : 45.75 MHz, Amplitude : 85 dB μ V, signal 2 Frequency : 42.17 MHz, Amplitude : 75 dB μ V, and signal 3 Frequency : 41.25 MHz, Amplitude : 75 dB μ V) to J1.
 • Apply DC voltage to TP3 and adjust it so that the bottom of the output signal at TP4 is equal to Vmin.
 • Measure frequency spectrum of the output signal at TP4.




NOTE	INPUT POINT	MEAS. POINT	SW3	SW8	VR13	SW14 b	TEST CONDITION			
							ON	OFF	ON	ON
Note 6	J1	TP4	OFF	ON	—	OFF			ON	ON
Note 7	J1	TP4	OFF	ON	—	OFF			ON	ON
Note 8	J1	TP4	OFF	ON	—	OFF			ON	ON
Note 9	J1	TP4	OFF	ON	—	OFF			ON	ON

• Input the signal (frequency : 45.75 MHz, Amplitude : 85 dB μ V, amplitude modulated by 100 IRE white picture) to J1.
 • Measure amplitude of the output signal at TP4 (VDet (p) V).

• Input the signal (frequency : 45.75 MHz, Amplitude : 85 dB μ V, amplitude modulated by black picture) to J1.
 • Measure video S / N at TP4 (HPF : 100 kHz, LPF : 4.2 MHz, CCIR Weighted) (S / N (p) dB).

• Input the signal (frequency : 45.75 MHz, Amplitude : 85 dB μ V, amplitude modulated by 100 IRE white picture) to J1.
 • Measure voltage of the sync. tip at TP4 (vsync V)

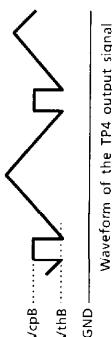• Input the signal (frequency : 45.75 MHz, Amplitude : 85 dB μ V, 15 kHz triangle wave /50% AM) to J1.
 • Apply DC voltage to TP3 and adjust it to get the waveform shown as below at TP4.
 • Measure VthB V and VcpB V at TP4.



Waveform of the TP4 output signal

NOTE	INPUT POINT	MEAS. POINT	SW3	SW8	VR13	SW14	SW17	TEST CONDITION	
								ON	ON
Note 10	J1	TP4	OFF	ON	-	OFF			

Input the mixture of 2 signals (signal 1 Frequency : 45.75 MHz, Amplitude : 82 dB μ V, signal 2 Frequency : 45.65 MHz, Amplitude : 69 dB μ V to J1.

- Measure the minimum voltage of the output signal at TP4 (V_{oTP4}).
- Apply DC voltage to TP3 and adjust it so that the minimum voltage of the output signal at TP4 is equal to V_{oTP4}.
- Decrease frequency of the input signal at J1, and measure amplitude of the output signal at TP4.
- Measure f_{Det(p)} show as below.

Output amplitude at TP4

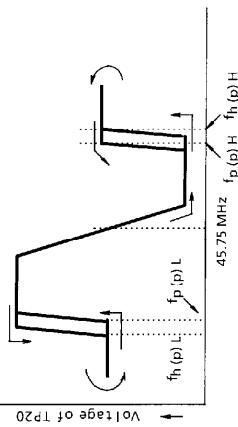
100 kHz

Frequency of the output signal at TP4

f_{Det(p)}

3 dB


Ref level

TEST CONDITION									
NOTE	INPUT POINT	MEAS. POINT	SW3	SW8	VR13	SW14	SW17	SW22	
Note 11	J1	TP20	OFF	ON	-	OFF	ON	ON	● Input the signal (frequency : 45.75 MHz, Amplitude : 85 dB _μ V) to J1. ● Sweep down the input signal frequency to 41.75 MHz, and sweep up to 49.75 MHz. Sweep down the input signal frequency to 45.75 MHz. ● Measure the voltage at TP20.
									
Note 12	TP9	Pin 18 Pin 19	OFF	ON	-	OFF	ON	ON	● Set the FET probe which connected to the spectrum analyzer near by pin 18 or pin 19 (Don't touch the probe directly to pin 18 or to pin 19). ● Apply 4.3 V to TP9, and measure frequency of the VCO oscillation by the spectrum analyzer (f_{LVCO} MHz). ● Apply 4.7 V to TP9, and measure frequency of the VCO oscillation by the spectrum analyzer (f_{HVCO} MHz). ● β MHz/V = $(f_{HVCO} - f_{LVCO}) / 0.4$

NOTE	INPUT POINT	MEAS. POINT	SW3	SW8	VR13	SW14 _b	TEST CONDITION						
								ON	ON	ON			
Note 13	J1	TP20	OFF	ON	—	OFF	ON	ON	ON	ON			
							• Input the signal (Frequency : 45.75 MHz — 20 kHz, Amplitude : 85 dBµV) to J1. • Measure voltage at TP20 (V _H TP20 V). • Input the signal (Frequency : 45.75 MHz + 20 kHz, Amplitude : 85 dBµV) to J1. • Measure voltage at TP20 (V _L TP20 V). • S AFT kHz / V = 40 / (V _H TP20 — V _L TP20) • Input the signal (Frequency : 45.75 MHz — 500 kHz, Amplitude : 85 dBµV) to J1. • Measure voltage at TP20 (VAFT max V). • Input the signal (Frequency : 45.75 MHz + 500 kHz, Amplitude : 85 dBµV) to J1. • Measure voltage at TP20 (VAFT min V).						
Note 14	—	TP20	OFF	ON	—	ON	ON	ON	ON	ON			
							• Measure voltage at TP20 (VAFT Def V).						


TEST CONDITION										
SIF section	NOTE	INPUT POINT	MEAS. POINT	SW3	SW8	V _{R13}	SW ₁₄ b	SW ₁₇	SW ₂₂	
Note 15	J1 J2	TP11	OFF	ON	—	OFF	OFF	ON	OFF	<ul style="list-style-type: none"> Input the signal (Frequency : 45.75 MHz, Amplitude : 85 dBμV) to J1, and input the signal (Frequency : 41.25 MHz, Amplitude : 75 dBμV) to J2. Change the amplitude of the signal at J2, and measure amplitude of the output signal at TP11.
Note 16	—	TP22	ON	ON	—	OFF	OFF	ON	—	<ul style="list-style-type: none"> Remove all connections from terminal 22. Measure resistance (Z_{in} R (s) kΩ and capacitance (Z_{in} C (s) pF) of TP1 and TP24 by the impedance meter.
Note 17	J3	TP17	ON	ON	—	OFF	OFF	ON	ON	<ul style="list-style-type: none"> Input the signal (Frequency : 4.5 MHz, Amplitude : 100 dBμV, 400 Hz sine wave / 25 kHz Devi FM) to J3. Measure amplitude of the output signal at TP17 (v_{oTP17}). Measure the input signal amplitude when the output amplitude from TP17 becomes -3 dB of v_{oTP17}, by decreasing the input signal amplitude to J3 ($v_{in lim}$ dBμV).

NOTE	INPUT POINT	MEAS. POINT	TEST CONDITION							
			SW3	SW8	V _{R13}	SW _b	SW ₁₄	SW ₁₇	SW ₂₂	SW ₁₇ /V _{AM} /TP17
Note 18	J ₃	TP17	ON	ON	—	OFF	ON	ON	ON	AMR4.5 dB = 20 log (v _{FM} TP17 / v _{AM} TP17)
										• Input the signal (Frequency : 4.5 MHz, Amplitude : 100 dB μ V, 400 Hz sine wave / 25 kHz Devi FM) to J ₃ . • Measure amplitude of the output signal at TP17 (v _{FM} TP17 mVrms).
										• Input the signal (Frequency : 4.5 MHz, Amplitude : 100 dB μ V, 400 Hz sine wave / 30% AM) to J ₃ . • Measure amplitude of the output signal at TP17 (v _{AM} TP17 mVrms).
Note 19	J ₃	TP17	ON	ON	—	OFF	ON	ON	ON	S/N4.5 = 20 log (v _{Det} (s) 4.5 / v _N TP17)
										• Input the signal (Frequency : 4.5 MHz, Amplitude : 100 dB μ V to J ₃ . • Measure amplitude of the output signal at TP17 output (THD4.5L %). • Measure amplitude of the output signal at TP17 (v _N TP17 mVrms).
Note 20	J ₃	TP12	ON	ON	—	OFF	ON	ON	ON	S/N4.5 = 20 log (v _{Det} (s) 4.5 / v _N TP17)
										• Input the signal (Frequency : 4.5 MHz, Amplitude : 100 dB μ V to J ₃ . • Change the frequency of the input signal, and measure voltage at TP12.

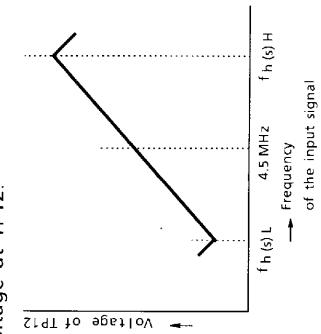


NOTE	INPUT POINT	MEAS. POINT	SW3	SW8	VR13	SW14 b				TEST CONDITION	
Note	J3	TP12	ON	ON	-	OFF			ON	ON	SW22
21										• Input the signal (Frequency : 1 MHz, Amplitude : 100 dB μ V) to J3. Increase frequency of the input signal. Measure voltage of TP12 (VTP120 V). Apply 5 V to TP12. Stop applying 5 V to TP12. Measure voltage of TP12 (VTP121 V). Measure frequency of the input signal when $VTP120 = VTP121(f_{p(s)L} \text{ MHz})$. Input the signal (frequency : 10 MHz, Amplitude : 100 dB μ V) to J3. Decrease frequency of the input signal. Measure voltage of TP12 (VTP122 V). Connect TP12 to GND. Open TP12. Measure voltage of TP12 (VTP123 V). Measure frequency of the input signal when $VTP122 = VTP123(f_{p(s)H} \text{ MHz})$.	
22										• Input the signal (DC 9 V + AC Frequency : 60 Hz, Amplitude : 100 mV _{p-p}) to V _{CC} terminal. Input the signal (Frequency : 1 MHz, Amplitude : 100 dB μ V) to J3. Measure amplitude of TP17 (vTP17 mV _{p-p}). RR dB = 20 log (vTP17 / 100).	ON

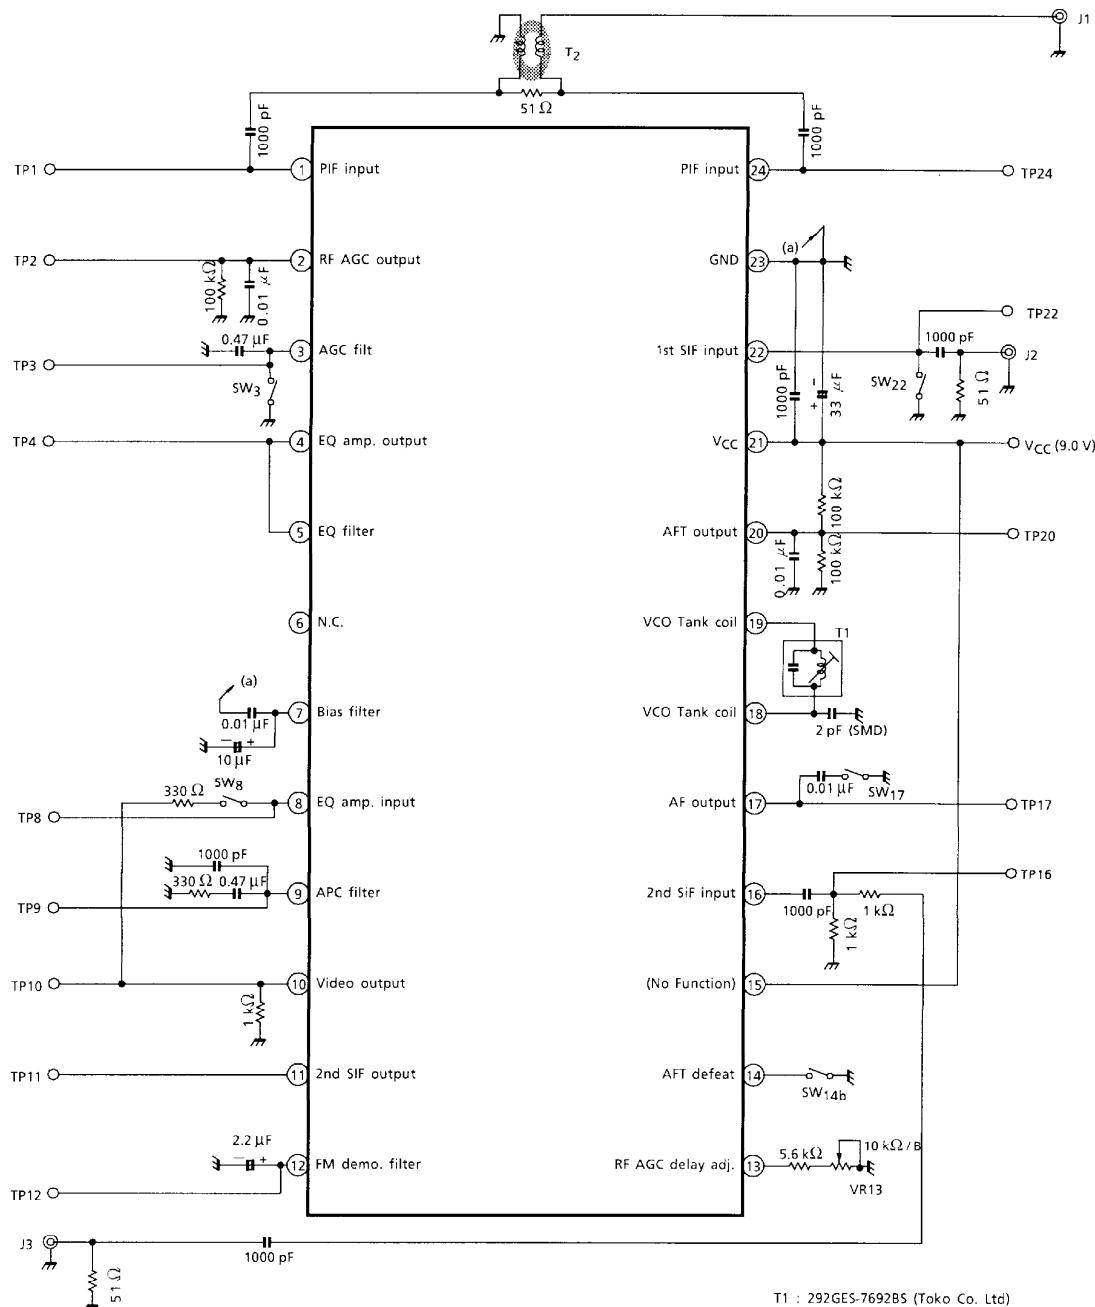TEST CIRCUIT




T1 : 292GES-7692BS (Toko Co. Ltd)
 T2 : 616DB-1048 (Toko Co. Ltd)

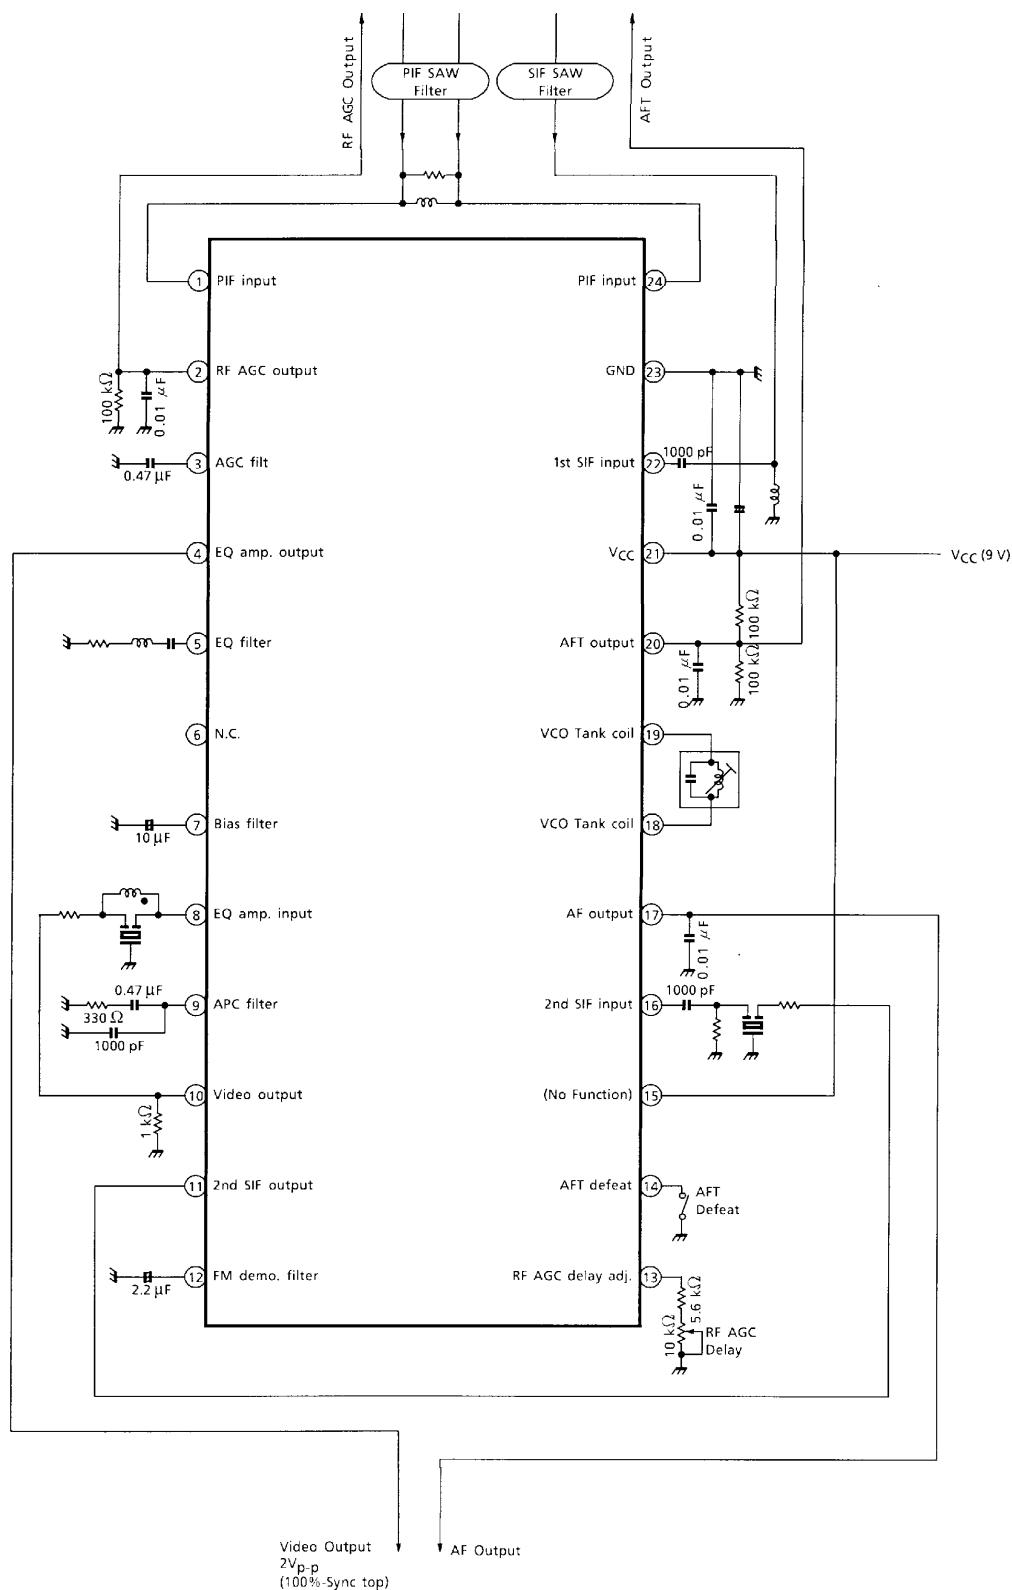APPLICATION CIRCUIT



PACKAGE DIMENSIONS
SSOP24-P-300-1.00B

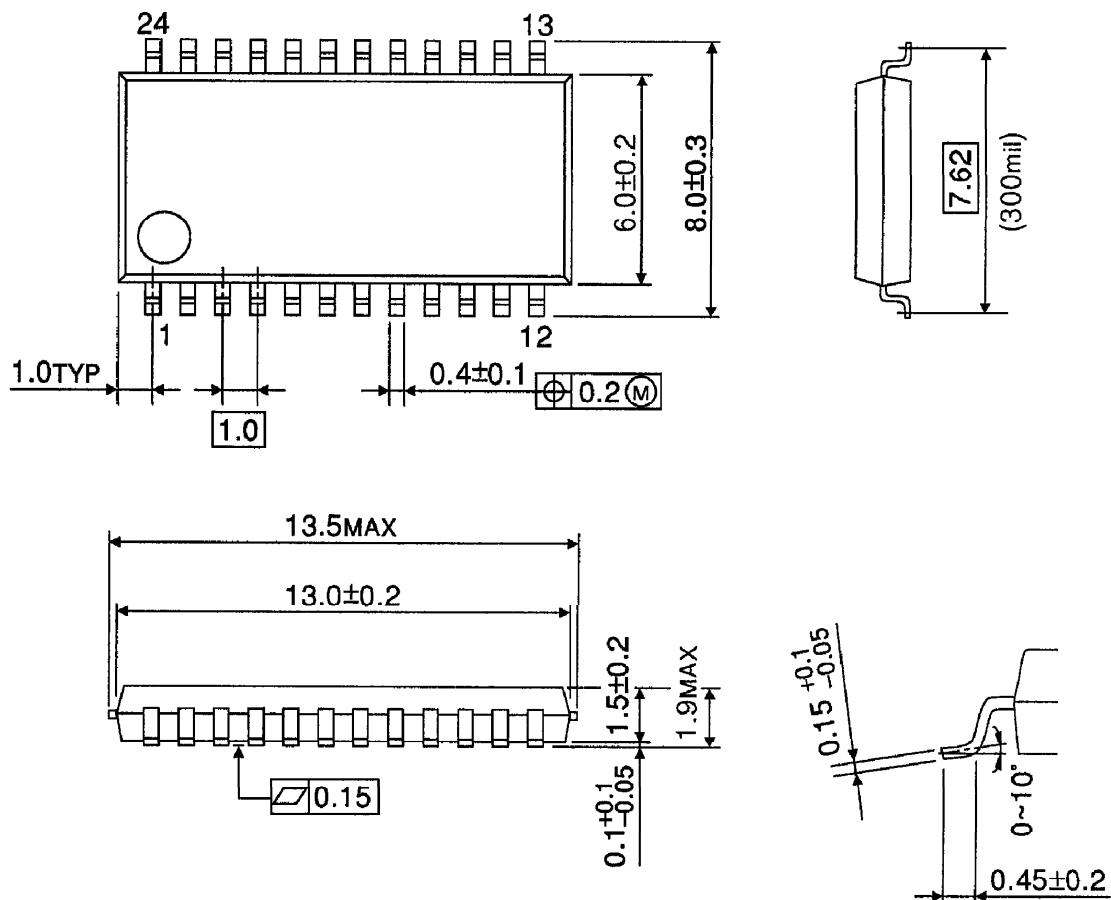Unit : mm



Weight : 0.27 g (Typ.)