




Data Sheet



Product Category: IF SAW Filter

Part Number	Package	Application	Last Modified
813-SL125.0M-30	13.3 x 6.5 SMD	Low-Loss 125MHz	Jan 01, 2007

TYPE :

Low-Loss 125MHz IF SAW Filter



PART NUMBER :

813-SL125.0M-30


OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS

PARAMETERS	Minimum	Typical	Maximum	Units
Center Frequency (Fo)	-	125.0	-	MHz
Insertion Loss at Fo	-	12.0	14.0	dB
Source Impedance (single ended)*	-	50	-	ohm
Load Impedance (single ended)*	-	50	-	ohm
Temperature Coefficient	-	-94	-	ppm/C
Amplitude Ripple fo +/-13.5MHz	-	0.65	1.0	dBp-p
1dB Bandwidth	29.0	30.5	-	MHz
3dB Bandwidth	29.5	30.6	-	MHz
40dB Bandwidth	-	36.0	33.5	MHz
Relative Attenuation:	-			
Lower Sidelobe	40	48	-	dB
Upper Sidelobe	40	48	-	dB
Absolute Delay at Fo	-	0.75	-	us
Group Delay Variation fo +/-13.5 MHz	-	25	80	ns
IN/OUT Return Loss at Fo	-	-	-	dB

*With Matching Network (Ref. Testing Environment Circuit as Shown Below).


Those impedances could be modified with different impedance values and/or structures, if necessary

PACKAGE OUTLINE (mm)

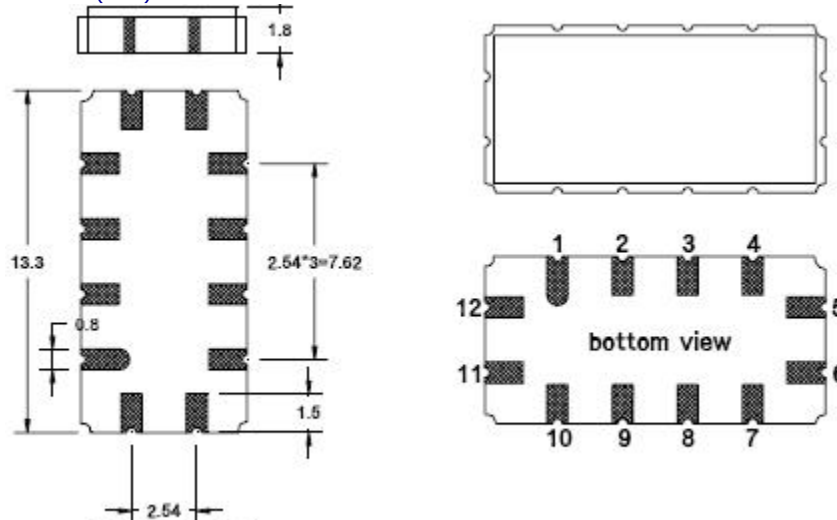

PIN Descriptions: IN – 11, OUT – 5, GROUND - 1,2,3,4,6,7,8,9,10,12

TEST CIRCUIT

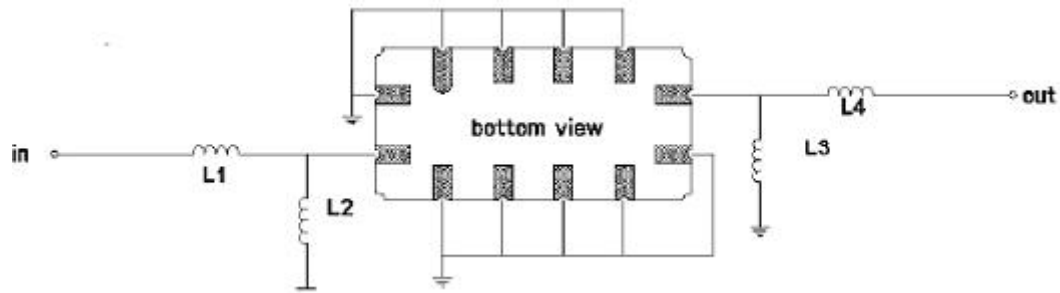


TEST FIXTURE AND VALUES/SOURCE AND LOAD IMPEDANCE 50 ohm

INPUT: L1: 100 nH; L2: 82 nH

OUTPUT: L3: 68 nH; L4: 100 nH

FREQUENCY RESPONSE

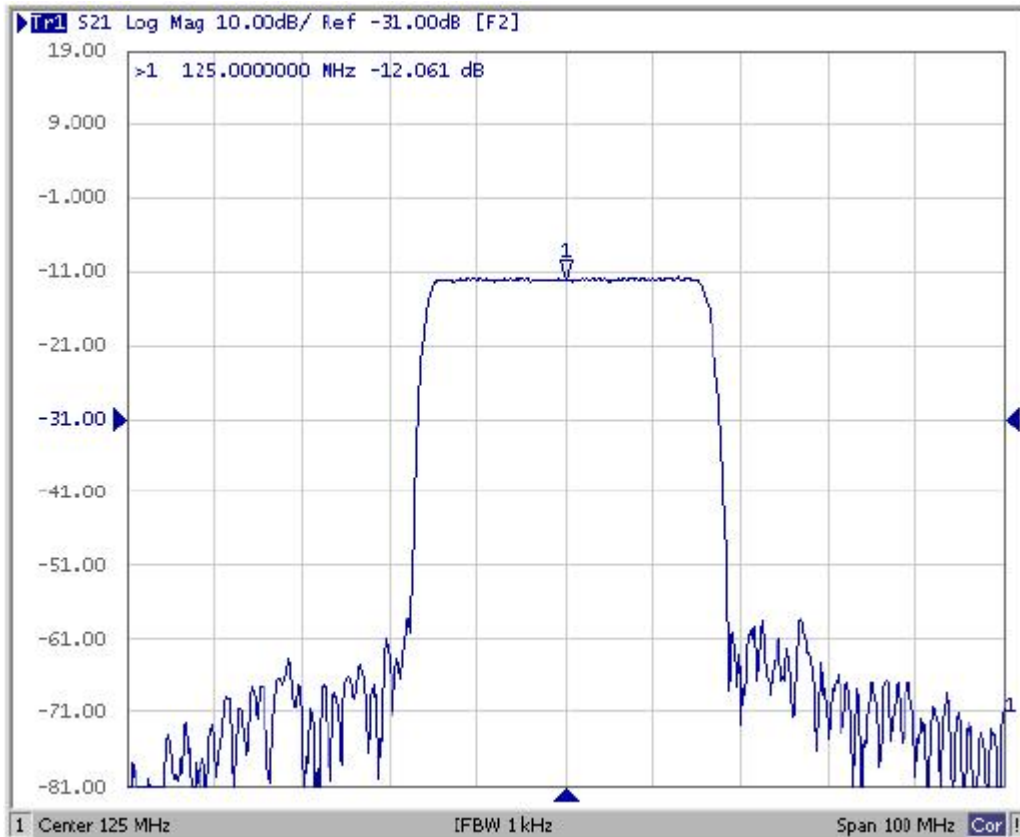

Oscilent Corporation - CALL **949.252.0522**

Part No.: 813-SL125.0M-30

18195 East McDermott Street, Building D, Irvine, CA 92614, USA

Fax: 949.252.0599, E-Mail: Sales@Oscilent.com