

**Data Sheet**
telephone
949 252 0522

 BACK

Product Category: IF SAW Filter

Part Number	Package	Application	Last Modified
813-SL62.5M-10	13.3 x 6.5 SMD	IF SAW Filter	Jan 01, 2007

TYPE :

Low-Loss 62.5MHz IF SAW Filter


PART NUMBER :

813-SL62.5M-10**OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS**

PARAMETERS	Minimum	Typical	Maximum	Units
Center Frequency (Fo)	-	62.5	-	MHz
Insertion Loss at Fo	-	15.5	17.0	dB
Source Impedance (single ended)*	-	50	-	ohm
Load Impedance (single ended)*	-	50	-	ohm
Temperature Coefficient	-	-94	-	ppm/C
Amplitude Ripple	-	0.4	1.0	dBp-p
1dB Bandwidth	9.5	9.85	-	MHz
3dB Bandwidth	10.2	10.6	-	MHz
40dB Bandwidth	-	13.9	15.0	MHz
Relative Attenuation:	-			
Lower sidelobe	40	48	-	dB
Upper sidelobe	40	45	-	dB
Absolute Delay at Fo	-	0.92	-	us
IN/OUT Return Loss at Fo	-	-	-	dB
Group Delay Variation	-	20	100	us


*With Matching Network (Ref. Testing Environment Circuit as Shown Below).

Those impedances could be modified with different impedance values and/or structures, if necessary

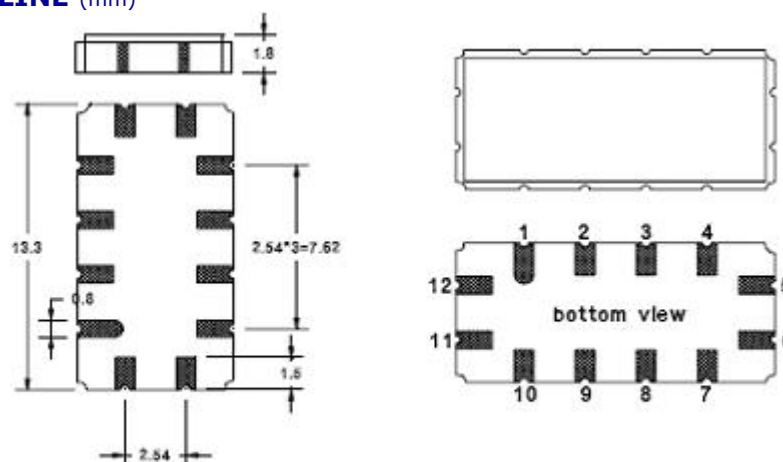PACKAGE OUTLINE (mm)

PIN Descriptions: IN – 11, OUT – 5, GROUND - 1,2,3,4,6,7,8,9,10,12

TEST CIRCUIT

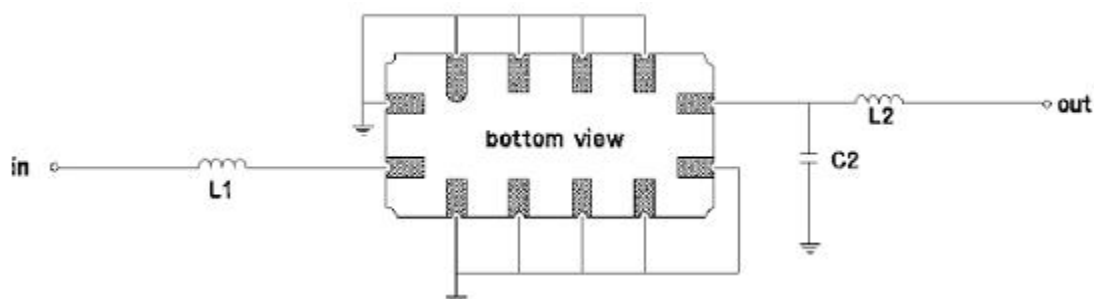


TEST FIXTURE AND VALUES/SOURCE AND LOAD IMPEDANCE 50 ohm

INPUT: L1: 180 nH

OUTPUT: L2: 150 nH; C2: 20 pF

FREQUENCY RESPONSE

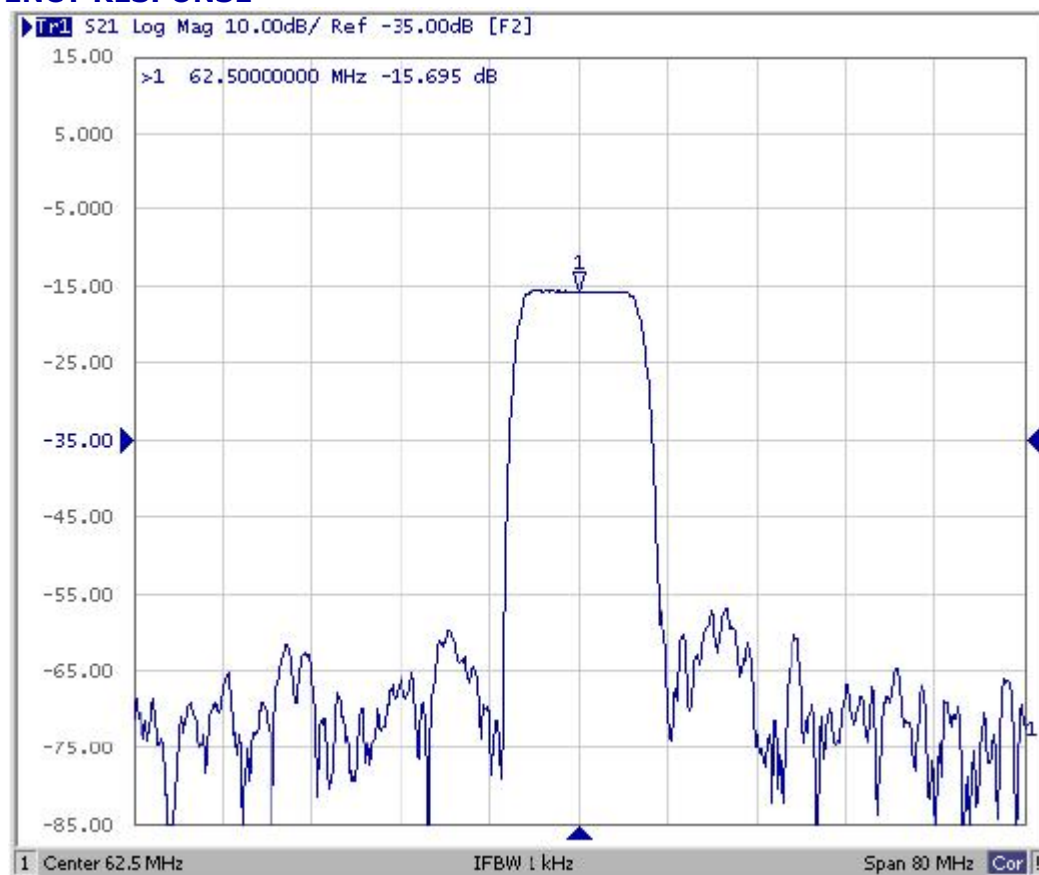

Oscilent Corporation - CALL **949.252.0522**

Part No.: 813-SL62.5M-10

18195 East McDermott Street, Building D, Irvine, CA 92614, USA
 Fax: 949.252.0599, E-Mail: Sales@Oscilent.com