

MABA-009487-60HWCA




E-Series RF 1:1 Transformer
0.4-500MHz

M/A-COM Products
Rev. V4

Features

- Surface Mount
- 1:1 Impedance Ratio
- CT on Secondary
- RoHS* Compliant 1:1 transformer
- Tape and reel packaging available

Product Image



Description

M/A-COM's MABA-009487-60HWCA is a RoHS compliant 1:1 RF flux coupled transformer in a low cost, surface mount package. Ideally suited for high volume cellular and wireless applications. Typical applications include single to balanced mode conversion and impedance matching. The MABA-009487-60HWCA transformer is designed to be utilized in both standard reflow and high temperature soldering reflow profiles.

Ordering Information

Part Number	Package
MABA-009487-60HWCA	Tape and Reel (2000 piece reels)

Electrical Specifications: $T_A = 25^\circ\text{C}$, $Z_0 = 50\Omega$

Parameter	Test Conditions	Frequency	Units	Min	Typ	Max
RF Frequency	—	0.4 - 500	MHz	—	—	—
Insertion Loss	—	0.4 - 200	dB	—	0.2	0.6
		200 - 400	dB	—	1.2	2
		400 - 500	dB	—	2.3	3
Amplitude Imbalance	—	0.4 - 500	dB	—	0.5	2
Phase Imbalance	—	0.4 - 500	Degrees	—	1	3
Input Return Loss	—	2 - 100	dB	—	26	20
		0.4 - 200	dB	—	20	13
		200 - 500	dB	—	10	9


Pin Configuration

Pin No.	Function
1	Secondary
2	Secondary CT
3	Secondary Dot
4	Primary Dot
5	Primary

Absolute Maximum Ratings ^{1,2}

Parameter	Absolute Maximum
RF Power	250 mW
DC Current	240 mA ²
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +125°C

Schematic

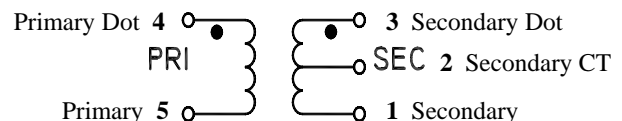

1. Operation of this device above any one of these parameters may cause permanent damage.
2. The maximum DC current applies to the secondary center tap in applications where the secondary is balanced.

1

* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.


ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.
PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 • **Europe** Tel: +353.21.244.6400
 • **India** Tel: +91.80.4155721 • **China** Tel: +86.21.2407.1588
 Visit www.macomtech.com for additional data sheets and product information.


M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

Typical Performance Curves


Insertion Loss

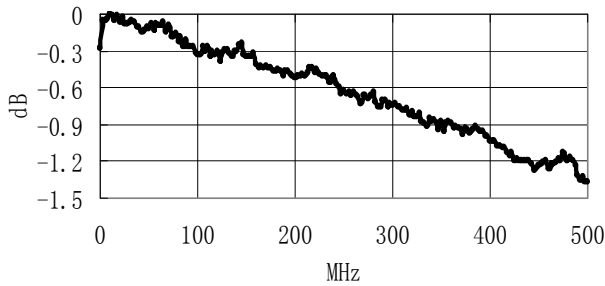


Amplitude Unbalance

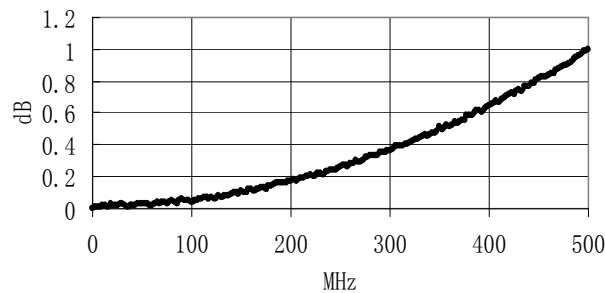


Phase Unbalance

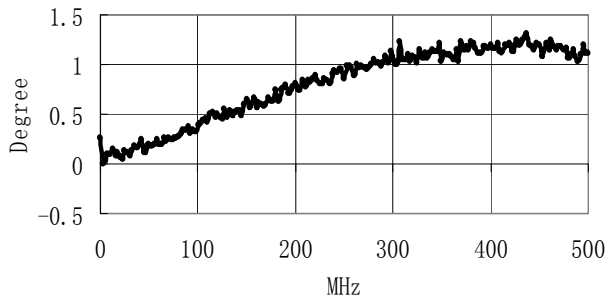

Input Return Loss

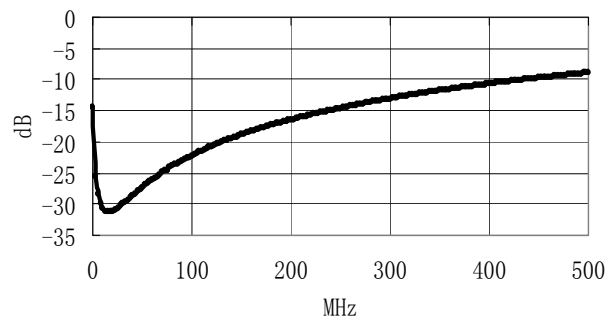

SM-195 Outline Drawing

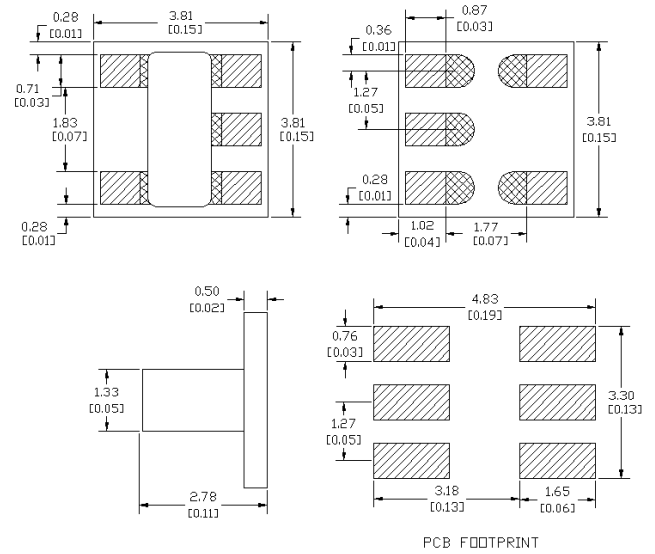

* Dimensions are millimeters (inches) ±0.38 (0.015) unless otherwise specified.