



Data Sheet


 telephone
 949 252 0522


BACK

Product Category: RF SAW Filter

 Part Number
 802-RF881.5M-A

 Package
 3.0 x 3.0 SMD

 Application
 CDMA Rx

 Last Modified
 Apr. 12 2003

TYPE :

881.5 MHz RF SAW Filter

PART NUMBER :




802-RF881.5M-A

OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS

PARAMETERS	Condition	Minimum	Typical	Maximum	Units
Center Frequency	-	-	881.5	-	MHz
Insertion Loss	869.0 ~ 894.0 MHz	-	2.5	3.0	dB
DC Voltage	-	-	-	5	V
Input Power	-	-	-	20	dBm
Operating Temperature	-	-30	-	+65	°C
Storage Temperature	-	-40	-	+85	°C
Ripple	869.0 ~ 894.0 MHz	-	1.3	2.0	dB
Stopband Attenuation	DC ~ 800 MHz	25.0	27.6	-	dB
	824.0 ~ 849.0 MHz	20.0	35.0	-	
	939.0 ~ 1120.0 MHz	28.0	31.0	-	
	1120.0 ~ 2000.0 MHz	20.0	30.0	-	
VSWR	869.0 ~ 894.0 MHz	-	1.8	2.0	-
Terminating Impedance	-	-	50	-	ohm


* Maximum Rating (Ta=25°C)

** Custom SAW RF Filters available. Contact Oscilent for assistance.

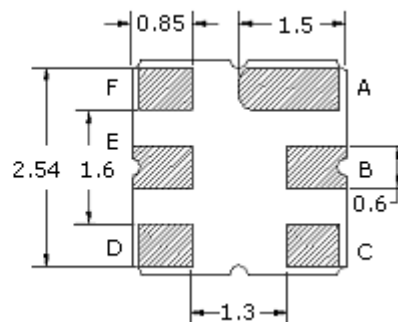



Pin Layout	
A	Ground
B	Output
C	Ground
D	Ground
E	Input
F	Ground

Frequency Reponse

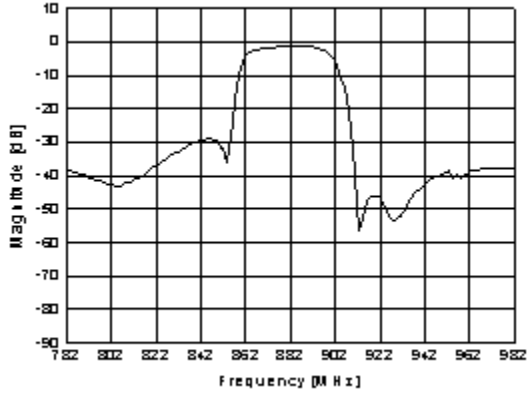


VSWR (S11, S22)

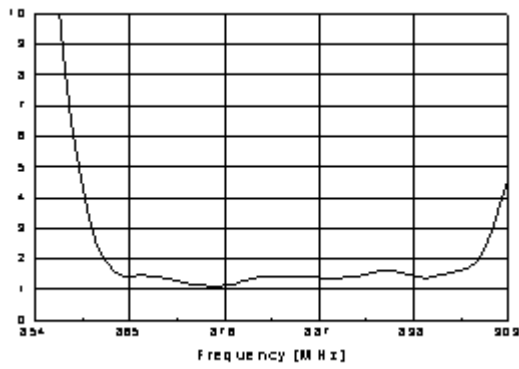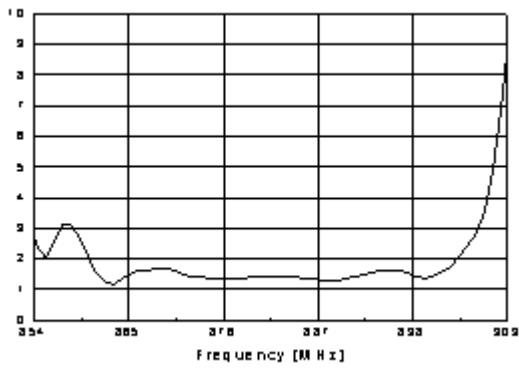

Smith Chart


S11

$36.2827 + j0.039159$
881.5 MHz

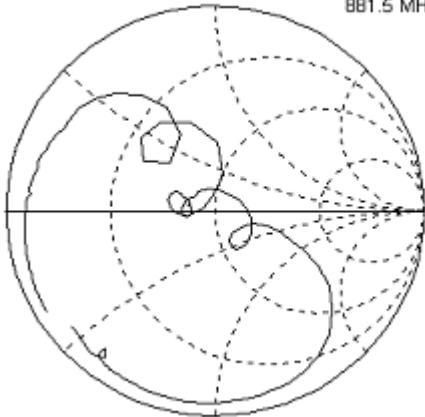

S22

$38.5844 - j7.1693$
881.5 MHz

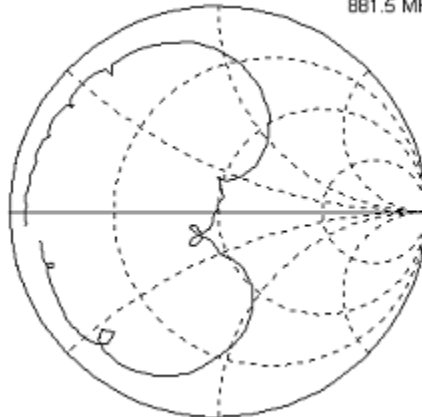

Oscilent Corporation - CALL **949.252.0522**
17962 Sky Park Circle . Building D . Irvine . CA 92614 . USA
Fax: 949.252.0599 . E-Mail: Sales@Oscilent.com

Part No.: 802-RF881.5M-A