


- Robust Construction to withstand reflow processes •
- Transformer type: Unbalance to Unbalance •


Electrical Parameters @ 25° C

Frequency Range (MHz)	Impedance Ratio	Insertion Loss (dB)		
		.04-300	.35-250	2-75
.04- 300	1:1	3	2	1

Schematic

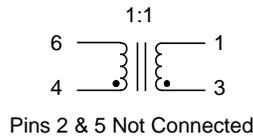

Package

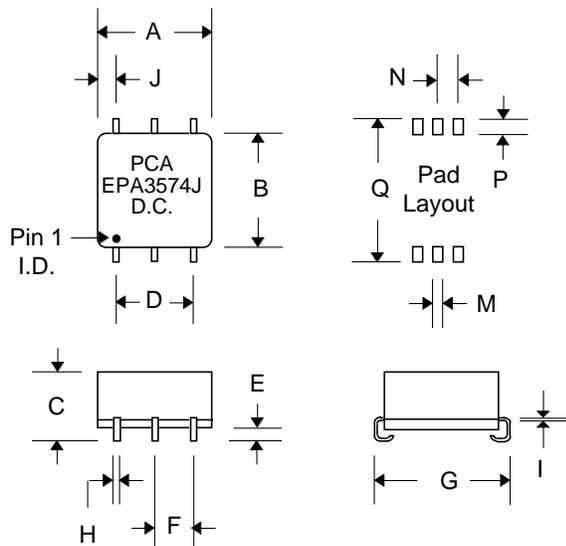

Dimensions

Dim.	(Inches)			(Millimeters)		
	Min.	Max.	Nom.	Min.	Max.	Nom.
A	.290	.310	.300	7.36	7.87	7.62
B	.250	.270	.260	6.35	6.86	6.60
C	.175	.195	.185	4.44	4.95	4.70
D	---	---	.200	---	---	5.08
E	.015	.035	.025	.381	.889	.889
F	---	---	.100	---	---	2.54
G	.270	.290	.280	6.86	7.37	7.11
H	.016	.022	.019	.410	.560	.560
I	---	---	.010	---	---	.254
J	---	---	.055	---	---	1.40
K	0°	8°	4°	0°	8°	8°
M	---	---	.050	---	---	1.27
N	---	---	.100	---	---	2.54
P	---	---	.090	---	---	2.29
Q	---	---	.310	---	---	7.87