

RF LIMITER MODEL TL9011

Available as: TNL9011, 4 Pin Surface Mount (SM3)
FPL9011, 4 Pin Flatpack (FP4)
BXL9011, Connectorized Housing (H1)

Features

- Voltage Variable Limiting Level
- Good Even Order Harmonic Suppression
- Low Insertion Loss
- Low VSWR
- 4 Pin TO-8 Metal Hermetic Package
- Operating Temp. -55 °C to + 85 °C

Specifications





Note: Care should always be taken to effectively ground the case of each unit.

CHARACTERISTIC	TYPICAL	MIN/MAX
Frequency (MHz)	5 - 500	5 - 500
Insertion Loss Power Input= -20 dBm V _b =+15	2.0	3.0
Output Level at Limiting Threshold (1 dB comp.)		
V _b = +20	-0.5	1.0
V _b = +15	-1.5	0.0
V _b = +10	-4.0	-2.5
V _b = +5	-11.0	-9.0
Max. Output Limiting Level @ +20 dBm (100 MHz)		
V _b = +20	+2.0	+3.0
V _b = +15	+1.0	+2.0
V _b = +10	-2.0	0.0
V _b = +5	-7.0	---
VSWR In	1.7:1	2.0:1
Out	1.7:1	2.0:1
Max Input Level (dBm)		+26
Bias Power Vdc	+15	+20
mA	7	10



Maximum Ratings

Ambient Operating Temperature -55°C to + 100 °C
Storage Temperature -62°C to + 125 °C
Case Temperature + 125 °C
DC Voltage + 25 Volts
Continuous RF Input Power + 13dBm
Short Term RF Input Power 400 Milliwatts
..... (1 Minute Max.)
Maximum Peak Power 1.0 Watt
..... (3 msec Max.)

Typical Performance Data

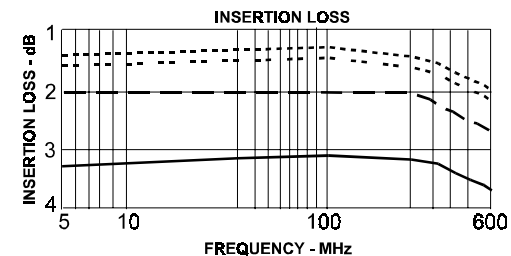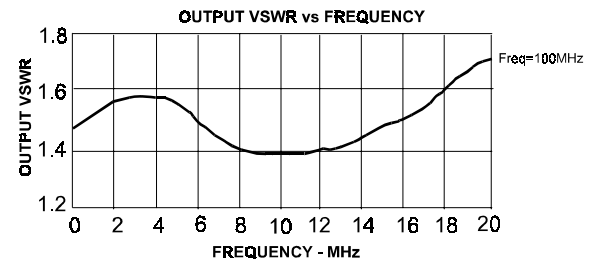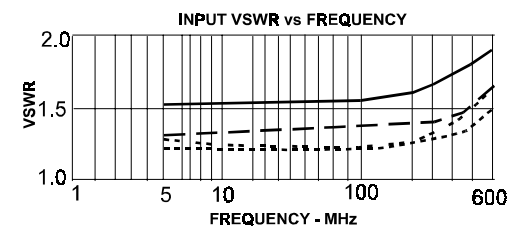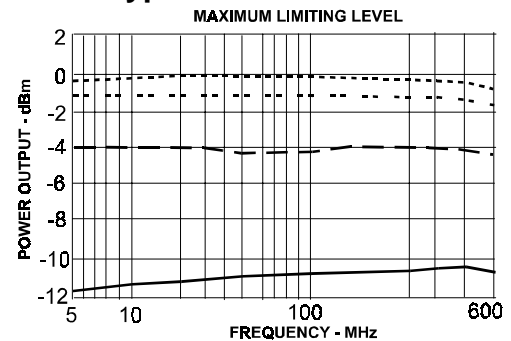

LIMITING CHARACTERISTICS

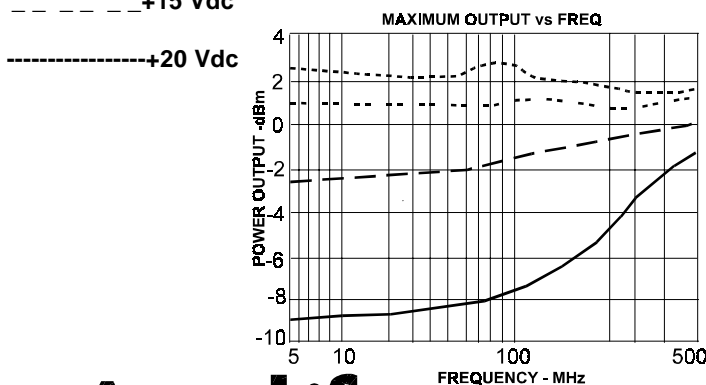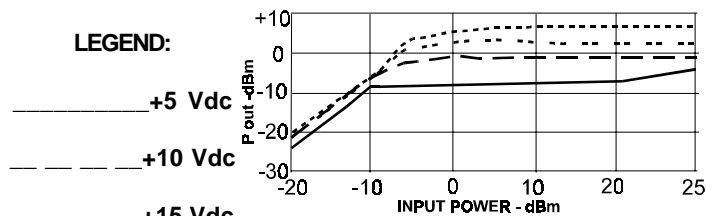

2707 Black Lake Place, Philadelphia, PA 19154

TEL 215-464-4000 •••• FAX 215-464-4001

03/24/2003