
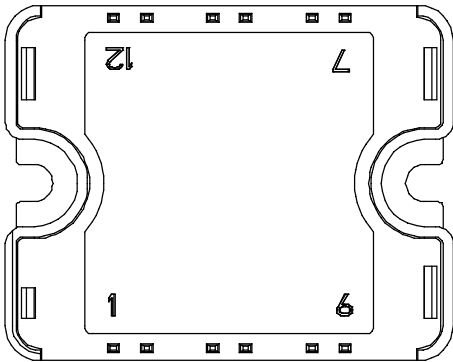


## Boost chopper Super Junction MOSFET Power Module

$V_{DSS} = 900V$   
 $R_{DSon} = 60m\Omega \text{ max @ } T_j = 25^\circ C$   
 $I_D = 59A \text{ @ } T_c = 25^\circ C$

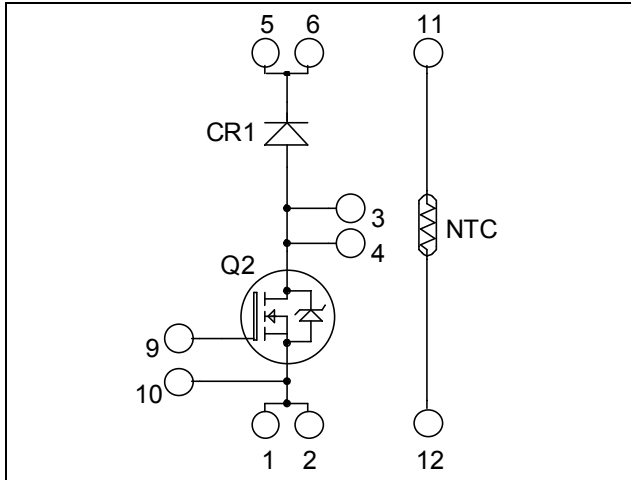

Pins 1/2 ; 3/4 ; 5/6 must be shorted together

### Application

- AC and DC motor control
- Switched Mode Power Supplies
- Power Factor Correction

### Features

- **COOLMOS** Power Semiconductors
  - Ultra low  $R_{DSon}$
  - Low Miller capacitance
  - Ultra low gate charge
  - Avalanche energy rated
  - Very rugged
- Kelvin source for easy drive
- Very low stray inductance
- Internal thermistor for temperature monitoring
- High level of integration

### Benefits

- Outstanding performance at high frequency operation
- Direct mounting to heatsink (isolated package)
- Low junction to case thermal resistance
- Solderable terminals both for power and signal for easy PCB mounting
- Low profile
- RoHS Compliant

### Absolute maximum ratings

| Symbol     | Parameter   | Max ratings        | Unit      |
|------------|---|--------------------|-----------|
| $V_{DSS}$  | Drain - Source Breakdown Voltage                  | 900                | V         |
| $I_D$      | Continuous Drain Current                          | $T_c = 25^\circ C$ | 59        |
|            |   | $T_c = 80^\circ C$ | 44        |
| $I_{DM}$   | Pulsed Drain current                              | 150                | A         |
| $V_{GS}$   | Gate - Source Voltage                             | $\pm 20$           | V         |
| $R_{DSon}$ | Drain - Source ON Resistance                      | 60                 | $m\Omega$ |
| $P_D$      | Maximum Power Dissipation                         | $T_c = 25^\circ C$ | 462       |
| $I_{AR}$   | Avalanche current (repetitive and non repetitive) | 8.8                | A         |
| $E_{AR}$   | Repetitive Avalanche Energy                       | 2.9                | mJ        |
| $E_{AS}$   | Single Pulse Avalanche Energy                     | 1940               |           |

**CAUTION:** These Devices are sensitive to Electrostatic Discharge. Proper Handling Procedures Should Be Followed. See application note APT0502 on [www.microsemi.com](http://www.microsemi.com)

All ratings @  $T_j = 25^\circ\text{C}$  unless otherwise specified

## Electrical Characteristics

| Symbol       | Characteristic                  | Test Conditions  | Min | Typ  | Max | Unit             |
|--------------|---------------------------------|--|-----|------|-----|------------------|
| $I_{DSS}$    | Zero Gate Voltage Drain Current | $V_{GS} = 0V, V_{DS} = 900V$ $T_j = 25^\circ\text{C}$  |     |      | 200 | $\mu\text{A}$    |
|              |                                 | $V_{GS} = 0V, V_{DS} = 900V$ $T_j = 125^\circ\text{C}$ |     | 1000 |     |                  |
| $R_{DS(on)}$ | Drain – Source on Resistance    | $V_{GS} = 10V, I_D = 52A$                              |     | 50   | 60  | $\text{m}\Omega$ |
| $V_{GS(th)}$ | Gate Threshold Voltage          | $V_{GS} = V_{DS}, I_D = 6\text{mA}$                    | 2.5 | 3    | 3.5 | V                |
| $I_{GSS}$    | Gate – Source Leakage Current   | $V_{GS} = \pm 20V, V_{DS} = 0V$                        |     |      | 200 | nA               |

## Dynamic Characteristics

| Symbol       | Characteristic            | Test Conditions   | Min | Typ  | Max | Unit |
|--------------|---------------------------|---|-----|------|-----|------|
| $C_{iss}$    | Input Capacitance         | $V_{GS} = 0V; V_{DS} = 100V$<br>$f = 1\text{MHz}$   |     | 13.6 |     | nF   |
| $C_{oss}$    | Output Capacitance        |   |     | 0.66 |     |      |
| $Q_g$        | Total gate Charge         | $V_{GS} = 10V$<br>$V_{Bus} = 400V$<br>$I_D = 52A$   |     | 540  |     | nC   |
| $Q_{gs}$     | Gate – Source Charge      |   |     | 64   |     |      |
| $Q_{gd}$     | Gate – Drain Charge       |   |     | 230  |     |      |
| $T_{d(on)}$  | Turn-on Delay Time        | <b>Inductive Switching (<math>125^\circ\text{C}</math>)</b><br>$V_{GS} = 10V$<br>$V_{Bus} = 600V$<br>$I_D = 52A$<br>$R_G = 3.8\Omega$ |     | 70   |     | ns   |
| $T_r$        | Rise Time                 |   |     | 20   |     |      |
| $T_{d(off)}$ | Turn-off Delay Time       |   |     | 400  |     |      |
| $T_f$        | Fall Time                 |   |     | 25   |     |      |
| $E_{on}$     | Turn-on Switching Energy  | <b>Inductive switching @ <math>25^\circ\text{C}</math></b><br>$V_{GS} = 10V; V_{Bus} = 600V$<br>$I_D = 52A; R_G = 3.8\Omega$          |     | 3    |     | mJ   |
| $E_{off}$    | Turn-off Switching Energy |   |     | 1.5  |     |      |
| $E_{on}$     | Turn-on Switching Energy  | <b>Inductive switching @ <math>125^\circ\text{C}</math></b><br>$V_{GS} = 10V; V_{Bus} = 600V$<br>$I_D = 52A; R_G = 3.8\Omega$         |     | 4.2  |     | mJ   |
| $E_{off}$    | Turn-off Switching Energy |   |     | 1.7  |     |      |

## Chopper diode ratings and characteristics

| Symbol    | Characteristic                          | Test Conditions   | Min                       | Typ | Max  | Unit          |
|-----------|---|---|---------------------------|-----|------|---------------|
| $V_{RRM}$ | Maximum Peak Repetitive Reverse Voltage |   | 1000                      |     |      | V             |
| $I_{RM}$  | Maximum Reverse Leakage Current         | $V_R = 1000V$   | $T_j = 25^\circ\text{C}$  |     | 100  | $\mu\text{A}$ |
|           |   |   | $T_j = 125^\circ\text{C}$ |     | 500  |               |
| $I_F$     | DC Forward Current                      | $T_c = 80^\circ\text{C}$                                  |                           | 60  |      | A             |
| $V_F$     | Diode Forward Voltage                   | $I_F = 60A$   |                           | 2.2 | 2.8  | V             |
|           |   | $I_F = 120A$  |                           | 2.8 |      |               |
|           |   | $I_F = 60A$ $T_j = 125^\circ\text{C}$                     |                           | 1.8 |      |               |
| $t_{rr}$  | Reverse Recovery Time                   | $I_F = 60A$<br>$V_R = 667V$<br>$di/dt = 200A/\mu\text{s}$ | $T_j = 25^\circ\text{C}$  |     | 235  | ns            |
|           |   |   | $T_j = 125^\circ\text{C}$ |     | 305  |               |
| $Q_{rr}$  | Reverse Recovery Charge                 | $I_F = 60A$<br>$V_R = 667V$<br>$di/dt = 200A/\mu\text{s}$ | $T_j = 25^\circ\text{C}$  |     | 460  | nC            |
|           |   |   | $T_j = 125^\circ\text{C}$ |     | 2600 |               |

## Thermal and package characteristics

Symbol Characteristic

|                   |  |             | Min  | Typ | Max  | Unit |
|-------------------|--|-------------|------|-----|------|------|
| R <sub>thJC</sub> | Junction to Case Thermal Resistance  | CoolMOS     |      |     | 0.27 | °C/W |
|                   |  | diode       |      |     | 0.9  |      |
| V <sub>ISOL</sub> | RMS Isolation Voltage, any terminal to case t=1 min, I <sub>isol</sub> <1mA, 50/60Hz |             | 4000 |     |      | V    |
| T <sub>J</sub>    | Operating junction temperature range   |             | -40  |     | 150  | °C   |
| T <sub>STG</sub>  | Storage Temperature Range  |             | -40  |     | 125  |      |
| T <sub>C</sub>    | Operating Case Temperature   |             | -40  |     | 100  |      |
| Torque            | Mounting torque  | To heatsink | M4   | 2.5 | 4.7  | N.m  |
| Wt                | Package Weight   |             |      |     | 80   | g    |

## Temperature sensor NTC (see application note APT0406 on www.microsemi.com for more information).


Symbol Characteristic

|                                   |                            |                        | Min | Typ  | Max | Unit |
|-----------------------------------|----------------------------|------------------------|-----|------|-----|------|
| R <sub>25</sub>                   | Resistance @ 25°C          |                        |     | 50   |     | kΩ   |
| ΔR <sub>25</sub> /R <sub>25</sub> |                            |                        |     | 5    |     | %    |
| B <sub>25/85</sub>                | T <sub>25</sub> = 298.15 K |                        |     | 3952 |     | K    |
| ΔB/B                              |                            | T <sub>C</sub> = 100°C |     | 4    |     | %    |

$$R_T = \frac{R_{25}}{\exp \left[ B_{25/85} \left( \frac{1}{T_{25}} - \frac{1}{T} \right) \right]}$$








T: Thermistor temperature  
 R<sub>T</sub>: Thermistor value at T





## SP1 Package outline (dimensions in mm)

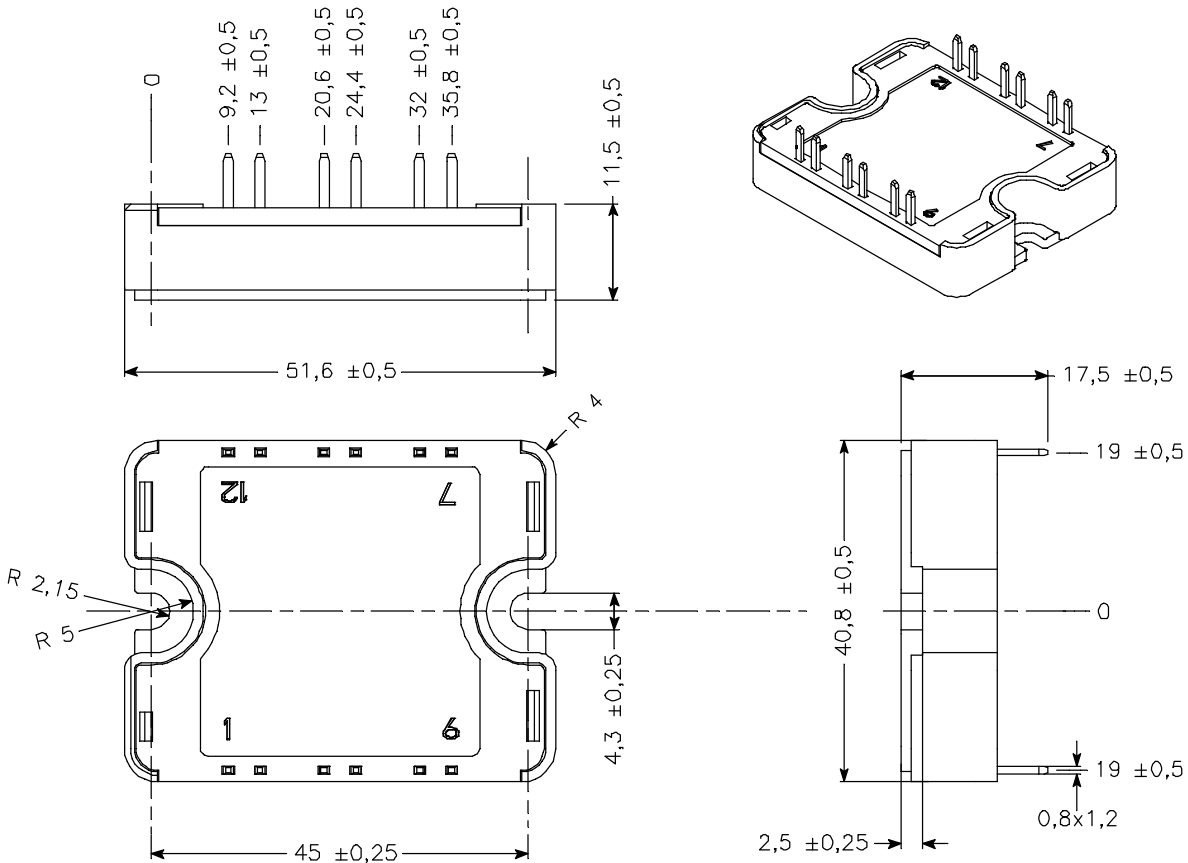

See application note 1904 - Mounting Instructions for SP1 Power Modules on [www.microsemi.com](http://www.microsemi.com)

## Typical CoolMOS Performance Curve

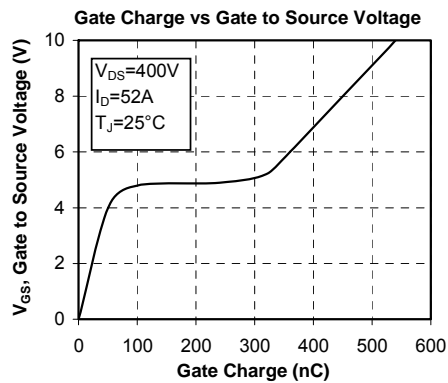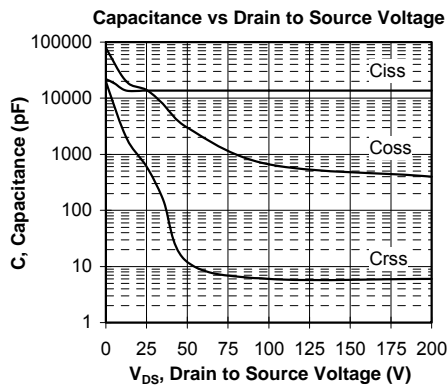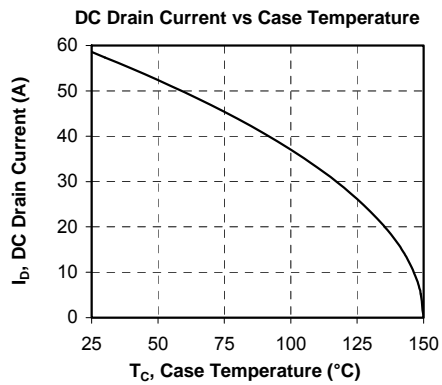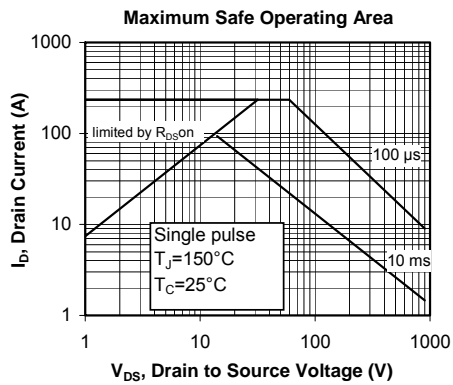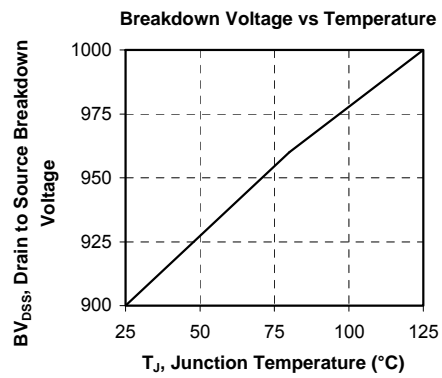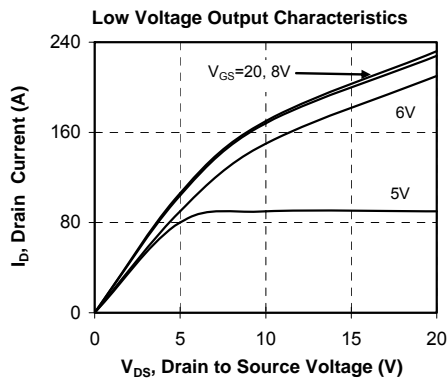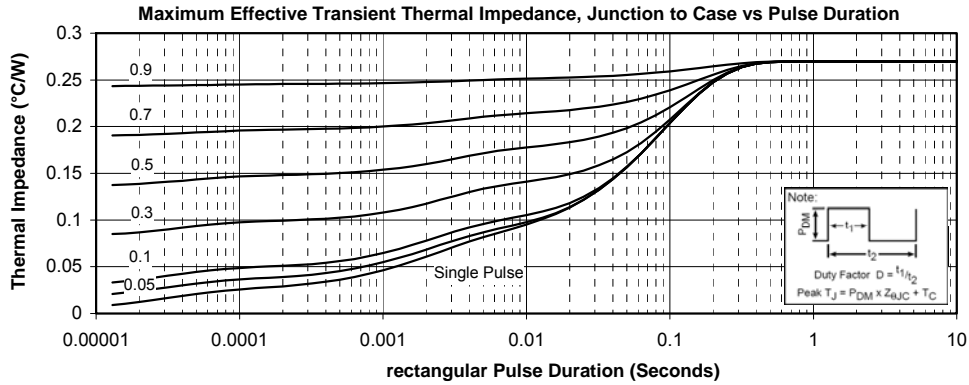

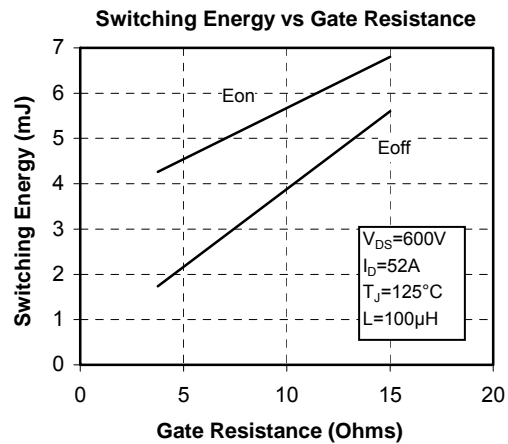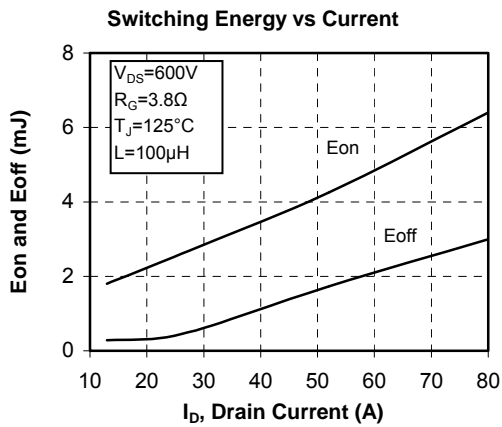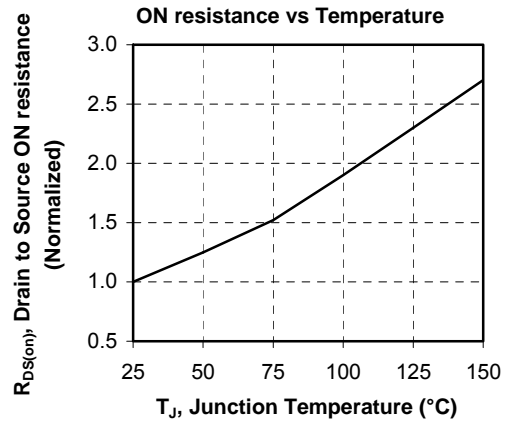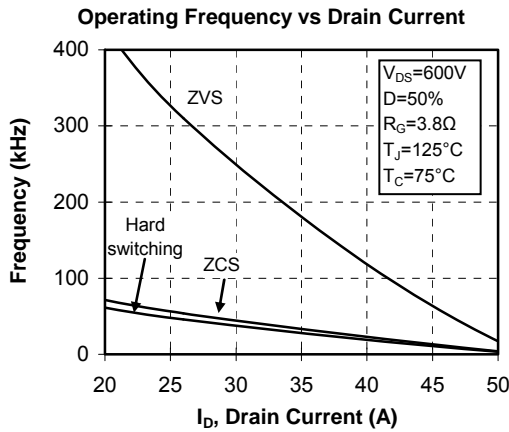

“COOLMOS™ comprise a new family of transistors developed by Infineon Technologies AG. “COOLMOS” is a trademark of Infineon Technologies AG”.

Microsemi reserves the right to change, without notice, the specifications and information contained herein

Microsemi's products are covered by one or more of U.S patents 4,895,810 5,045,903 5,089,434 5,182,234 5,019,522 5,262,336 6,503,786 5,256,583 4,748,103 5,283,202 5,231,474 5,434,095 5,528,058 6,939,743 7,352,045 5,283,201 5,801,417 5,648,283 7,196,634 6,664,594 7,157,886 6,939,743 7,342,262 and foreign patents. U.S and Foreign patents pending. All Rights Reserved.