

isc Silicon NPN Power Transistor


2SD1118

DESCRIPTION

- Collector-Emitter Breakdown Voltage-  
:  $V_{(BR)CEO} = 50V(\text{Min})$
- High DC Current Gain-  
:  $h_{FE} = 300V(\text{Min.}) @ I_C = 1A$
- Low Collector Saturation Voltage
- High Reliability


APPLICATIONS

- Switching regulators
- DC-DC converter
- Solid state relay
- General purpose power amplifiers

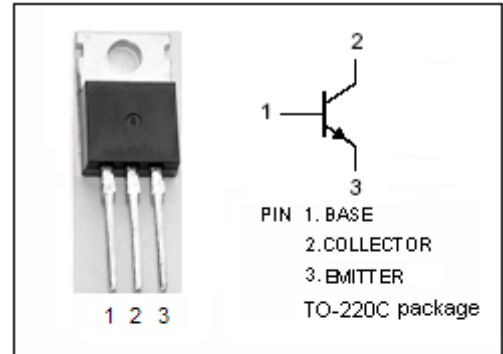

ABSOLUTE MAXIMUM RATINGS( $T_a=25^\circ\text{C}$ )

SYMBOL	PARAMETER	VALUE	UNIT
$V_{CBO}$	Collector-Base Voltage	80	V
$V_{CEO}$	Collector-Emitter Voltage	50	V
$V_{EBO}$	Emitter-Base Voltage	15	V
$I_C$	Collector Current-Continuous	10	A
$I_B$	Base Current-Continuous	3	A
$P_C$	Collector Power Dissipation @ $T_C=25^\circ\text{C}$	50	W
$T_J$	Junction Temperature	150	$^\circ\text{C}$
$T_{stg}$	Storage Temperature Range	-55~150	$^\circ\text{C}$

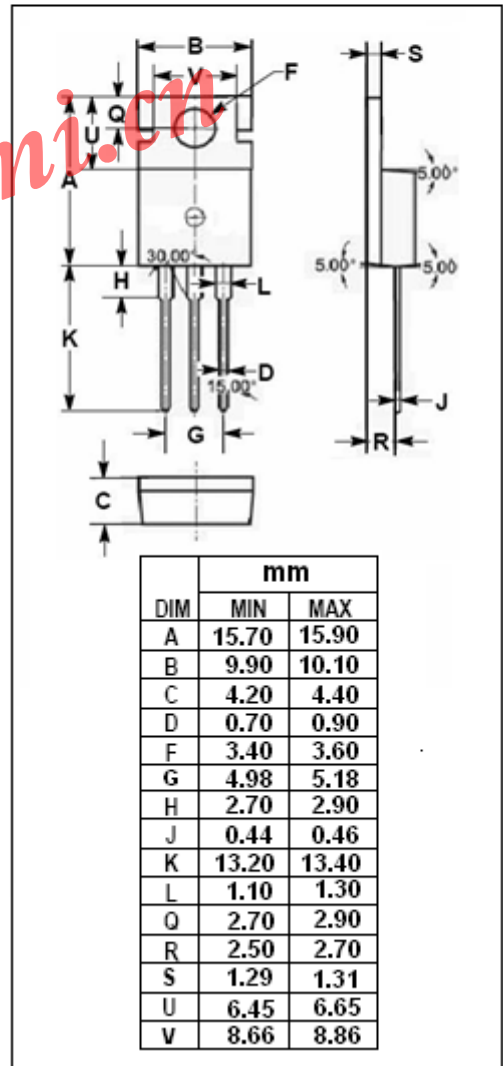

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	Thermal Resistance, Junction to Case	2.5	$^\circ\text{C/W}$

## isc Silicon NPN Power Transistor

## 2SD1118

## ELECTRICAL CHARACTERISTICS

 $T_C=25^{\circ}\text{C}$  unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	$I_C=10\text{mA}; I_B=0$	50			V
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage	$I_C=0.1\text{mA}; I_E=0$	80			V
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage	$I_E=0.1\text{mA}; I_C=0$	15			V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C=2\text{A}; I_B=0.1\text{A}$			0.5	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	$I_C=2\text{A}; I_B=0.1\text{A}$			1.5	V
$I_{CBO}$	Collector Cutoff Current	$V_{CB}=80\text{V}; I_E=0$			10	$\mu\text{A}$
$I_{EBO}$	Emitter Cutoff Current	$V_{EB}=15\text{V}; I_C=0$			100	$\mu\text{A}$
$h_{FE}$	DC Current Gain	$I_C=1\text{A}; V_{CE}=5\text{V}$	300			

## Switching times

$t_{on}$	Turn-on Time	$I_C=5\text{A}, I_{B1}=-I_{B2}=0.5\text{A};$ $R_L=6\Omega; P_W=20\mu\text{s}; \text{Duty}\leq 2\%$			0.5	$\mu\text{s}$
$t_{stg}$	Storage Time				3.0	$\mu\text{s}$
$t_f$	Fall Time				0.8	$\mu\text{s}$